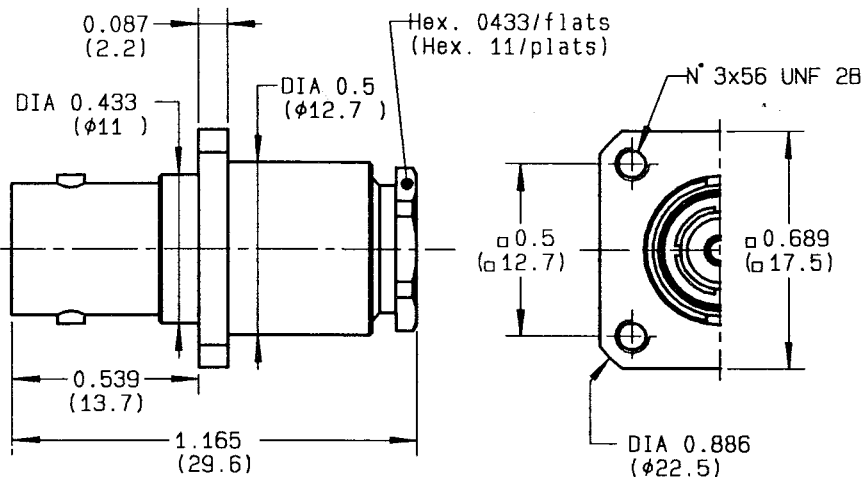
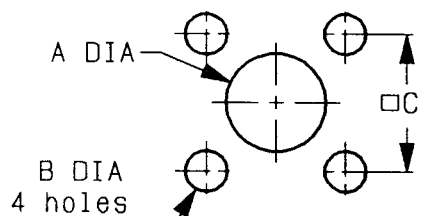


STRAIGHT FLANGE MOUNT CABLE JACK-CLAMP TYPE
 CABLE 2.6/50+75

Series : BNC

1 / 2


 PERCEPAGE PANNEAU
 MOUNTING HOLE


	MM		INCH	
	maxi	mini	maxi	mini
A	11.3	11.2	0.445	0.44
Ab	13	12.9	0.512	0.51
B	2.7	2.6	0.106	0.102
C	12.75	12.65	0.502	0.498

CABLES : RG174 RG179

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-4	GHz
TEMPERATURE RATING	-65/+165	°C
VSWR	TBD + 0 x 5(GHz)Maxi	
RF INSERTION LOSS	TBD $\sqrt{F}$ (GHz) dB Maxi	
VOLTAGE RATING	500	Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	1500	Vrms min
INSULATION RESISTANCE	5000	MΩ min
HERMETIC SEAL	-	cc/s
	-	Atm.cm3/s
LEAKAGE (pressurized only)	-	psi
	-	MPa
WEIGHT	0	Oz
	-	g

STANDARDISATION

CABLE RETENTION

CENTER CONTACT RETENTION

Axial force - mating end 6.11 27.2 N min

Axial force - opposite end 5.11 27.2 N min

Torque (Min) 0 In.h.oz cm.N

RECOMMENDED TORQUES

Mating 0 In.h.oz cm.N

Panel nut 0 In.h.oz cm.N

Clamp nut 39.82 450 In.h.oz cm.N

CONSTRUCTION

CONNECTOR PARTS

MATERIALS

FINISH

 BODY
 OUTER CONTACT
 CENTER CONTACT
 INSULATOR

 BRASS
 BRASS
 BERYLLIUM COPPER
 PTFE

 NICKEL
 NICKEL
 GOLD

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-


Initiated on 04/02/92

The information given here is subject to change without notice. Design changes may be in order to improve the product.




Approval by BAFFERT

GAUTIER

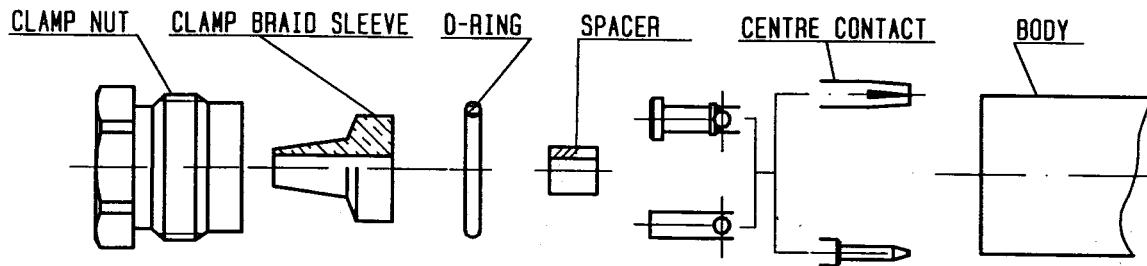

①


Slide clamp nut onto cable .
Strip the cable .
Cut the jacket (2 slots)
apart if necessary .

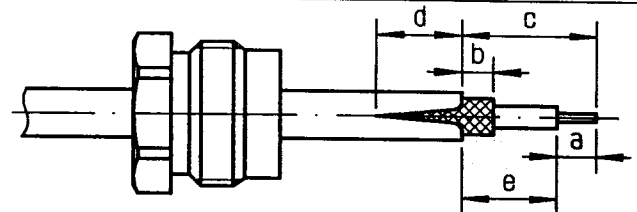

Stripping	a	b	c	d	e
inch	0.157	0.079	0.354	0.079	0.197
mm	4	2	9	2	5


②

Slide the clamp braid sleeve between
cable dielectric and braid .
Cut the braid flush with the clamp
braid sleeve .
Slide the spacer .

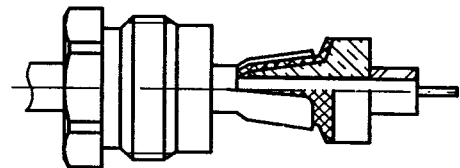


③

Solder the cable inner conductor into
centre contact .
Slide the back nut over the clamp
assembly .

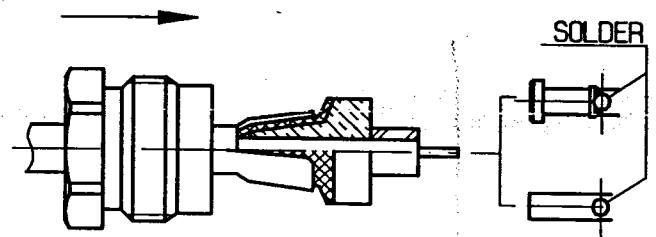

④

Mount the gasket into the connector .
Screw sub-assembly into the connector
body .
(recommended coupling torque 39.82 in.lb)

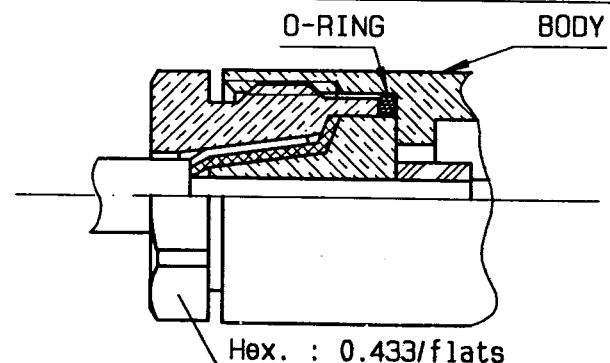

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R141254000](#)