

UUN Chip Type, Bi-Polarized,
Higher Capacitance Range




- Chip Type, higher capacitance in larger case sizes ($\phi 12.5$, $\phi 16$, $\phi 18$)
- Designed for surface mounting on high density PC board.
- Bi-polarized series for operations over wide temperature range of -55 to $+105^{\circ}\text{C}$.
- Applicable to automatic mounting machine fed with carrier tape and tray.
- Compliant to the RoHS directive (2011/65/EU).




Specifications

Item	Performance Characteristics																													
Category Temperature Range	-55 to $+105^{\circ}\text{C}$																													
Rated Voltage Range	6.3 to 100V																													
Rated Capacitance Range	22 to 3300 μF																													
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																													
Leakage Current	After 1 minute's application of rated voltage at 20°C , leakage current is not more than 0.03CV or 4 (μA), whichever is greater.																													
Tangent of loss angle ($\tan \delta$)	<p>Measurement frequency : 120Hz at 20°C</p> <table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>$\tan \delta$ (MAX.)</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> </tr> </table> <p>For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	$\tan \delta$ (MAX.)	0.26	0.22	0.18	0.16	0.14	0.12	0.10	0.09											
Rated voltage (V)	6.3	10	16	25	35	50	63	100																						
$\tan \delta$ (MAX.)	0.26	0.22	0.18	0.16	0.14	0.12	0.10	0.09																						
Stability at Low Temperature	<p>Measurement frequency: 120Hz</p> <table border="1"> <tr> <td colspan="2">Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td rowspan="2">Impedance ratio ZT / Z20 (MAX.)</td> <td>Z-25°C / Z$+20^{\circ}\text{C}$</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z$+20^{\circ}\text{C}$</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)		6.3	10	16	25	35	50	63	100	Impedance ratio ZT / Z20 (MAX.)	Z -25°C / Z $+20^{\circ}\text{C}$	5	4	3	2	2	2	2	2	Z -40°C / Z $+20^{\circ}\text{C}$	10	8	6	4	3	3	3	3
Rated voltage (V)		6.3	10	16	25	35	50	63	100																					
Impedance ratio ZT / Z20 (MAX.)	Z -25°C / Z $+20^{\circ}\text{C}$	5	4	3	2	2	2	2	2																					
	Z -40°C / Z $+20^{\circ}\text{C}$	10	8	6	4	3	3	3	3																					
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C with the polarity inverted every 250 hours.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 20\%$ of the initial capacitance value</td> </tr> <tr> <td>$\tan \delta$</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within $\pm 20\%$ of the initial capacitance value	$\tan \delta$	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																							
Capacitance change	Within $\pm 20\%$ of the initial capacitance value																													
$\tan \delta$	200% or less than the initial specified value																													
Leakage current	Less than or equal to the initial specified value																													
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C , they shall meet the specified values for the endurance characteristics listed above.																													
Marking	Black print on the case top.																													

Chip Type

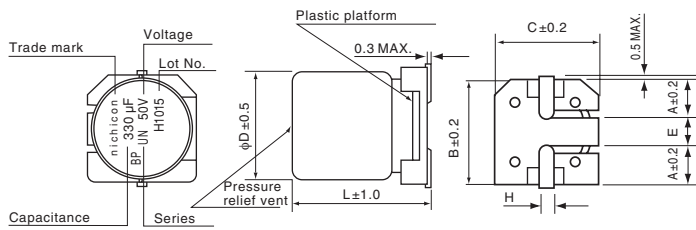

Type numbering system (Example : 50V 330 μF)

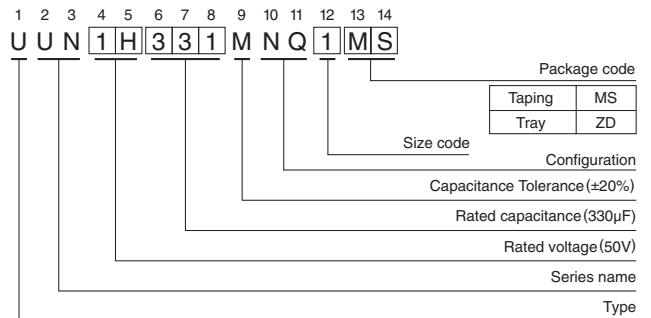

(mm)

ϕD	12.5x13.5	12.5x16	16x16.5	16x21.5	18x16.5	18x21.5
A	4.8	4.8	5.4	5.4	6.4	6.4
B	13.6	13.6	17.1	17.1	19.1	19.1
C	13.6	13.6	17.1	17.1	19.1	19.1
E	4.0	4.0	6.3	6.3	6.3	6.3
L	13.5	16.0	16.5	21.5	16.5	21.5
H	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

※ The vibration structure-resistant product is also available upon request, please ask for details.

● Dimension table in next page.



■ Dimensions

(μF) Cap.	Code	V		6.3		10		16		25		35		50		63		100		
		0J		1A		1C		1E		1V		1H		1J		2A				
22	220																		12.5 × 13.5	100
33	330																		12.5 × 16	150
47	470													12.5 × 13.5	130	12.5 × 13.5	140	16 × 16.5	180	
100	101											12.5 × 13.5	180	12.5 × 16	230	16 × 16.5	270	18 × 21.5	310	
220	221								12.5 × 13.5	270	16 × 16.5	330	18 × 16.5	400	▲ 16 × 21.5	400	18 × 21.5	440		
330	331					12.5 × 13.5	310	16 × 16.5	370	18 × 16.5	450	18 × 21.5	540			▲ 18 × 21.5	590			
470	471	12.5 × 13.5	270	12.5 × 13.5	340	16 × 16.5	420	16 × 16.5	490	18 × 21.5	590			▲ 18 × 21.5	640					
1000	102	12.5 × 16	500	16 × 16.5	600	18 × 16.5	670	18 × 21.5	780											
						▲ 16 × 21.5	670													
2200	222	18 × 16.5	740	18 × 21.5	830															
		▲ 16 × 21.5	740																	
3300	332	18 × 21.5	920																Case size φ D × L (mm)	Rated ripple

※ In this case, [6] will be put at 12th digit of type numbering system, "▲"

Rated ripple current (mArms) at 105°C 120Hz

● Frequency coefficient of rated ripple current

Cap.(μF)	Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
22 to 47		0.75	1.00	1.35	1.57	2.00
100 to 470		0.80	1.00	1.23	1.34	1.50
1000 to 3300		0.85	1.00	1.10	1.13	1.15

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UUN1H101MNL1MS](#) [UUL1V4R7MCL1GS](#) [UUN0J102MNQ1MS](#) [UUN0J222MNQ1MS](#) [UUN0J222MNQ6MS](#)
[UUN0J332MNQ1MS](#) [UUN0J471MNQ1MS](#) [UUN1A102MNQ1MS](#) [UUN1A222MNQ1MS](#) [UUN1A471MNQ1MS](#)
[UUN1C102MNQ1MS](#) [UUN1C102MNQ6MS](#) [UUN1C331MNQ1MS](#) [UUN1C471MNQ1MS](#) [UUN1E102MNQ1MS](#)
[UUN1E221MNQ1MS](#) [UUN1E331MNQ1MS](#) [UUN1E471MNQ1MS](#) [UUN1H101MNQ1MS](#) [UUN1H221MNQ1MS](#)
[UUN1H221MNQ6MS](#) [UUN1H331MNQ1MS](#) [UUN1H470MNQ1MS](#) [UUN1H471MRQ1MS](#) [UUN1J101MNQ1MS](#)
[UUN1J221MNQ1MS](#) [UUN1J331MRQ1MS](#) [UUN1J470MNQ1MS](#) [UUN1V101MNQ1MS](#) [UUN1V221MNQ1MS](#)
[UUN1V331MNQ1MS](#) [UUN1V331MNQ6MS](#) [UUN1V471MNQ1MS](#) [UUN2A101MNQ1MS](#) [UUN2A220MNQ1MS](#)
[UUN2A330MNQ1MS](#) [UUN2A470MNQ1MS](#) [UUN0J222MNQ6ZD](#) [UUN1H221MNQ1ZD](#) [UUN1J101MNQ1ZD](#)
[UUN1C102MNQ6ZD](#) [UUN1V471MNQ1ZD](#) [UUN0J102MNQ1ZD](#) [UUN1E471MNQ1ZD](#) [UUN1A471MNQ1ZD](#)
[UUN1V331MNQ1ZD](#) [UUN1A222MNQ1ZD](#) [UUN1V221MNQ1ZD](#) [UUN1E331MNQ1ZD](#) [UUN2A101MNQ1ZD](#)
[UUN1C331MNQ1ZD](#) [UUN1H221MNQ6ZD](#) [UUN1J221MNQ1ZD](#) [UUN1C471MNQ1ZD](#) [UUN2A220MNQ1ZD](#)
[UUN1H331MNQ1ZD](#) [UUN1J331MRQ1ZD](#) [UUN0J332MNQ1ZD](#) [UUN0J471MNQ1ZD](#) [UUN1H470MNQ1ZD](#)
[UUN1J470MNQ1ZD](#) [UUN1E102MNQ1ZD](#) [UUN2A330MNQ1ZD](#) [UUN1H471MRQ1ZD](#) [UUN1V101MNQ1ZD](#)
[UUN1A102MNQ1ZD](#) [UUN1E221MNQ1ZD](#) [UUN1H101MNQ1ZD](#) [UUN1V331MNQ6ZD](#) [UUN1C102MNQ1ZD](#)
[UUN0J222MNQ1ZD](#)