

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

REVISIONS

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	ECR-17-017581	04DEC2017	GSK	KN

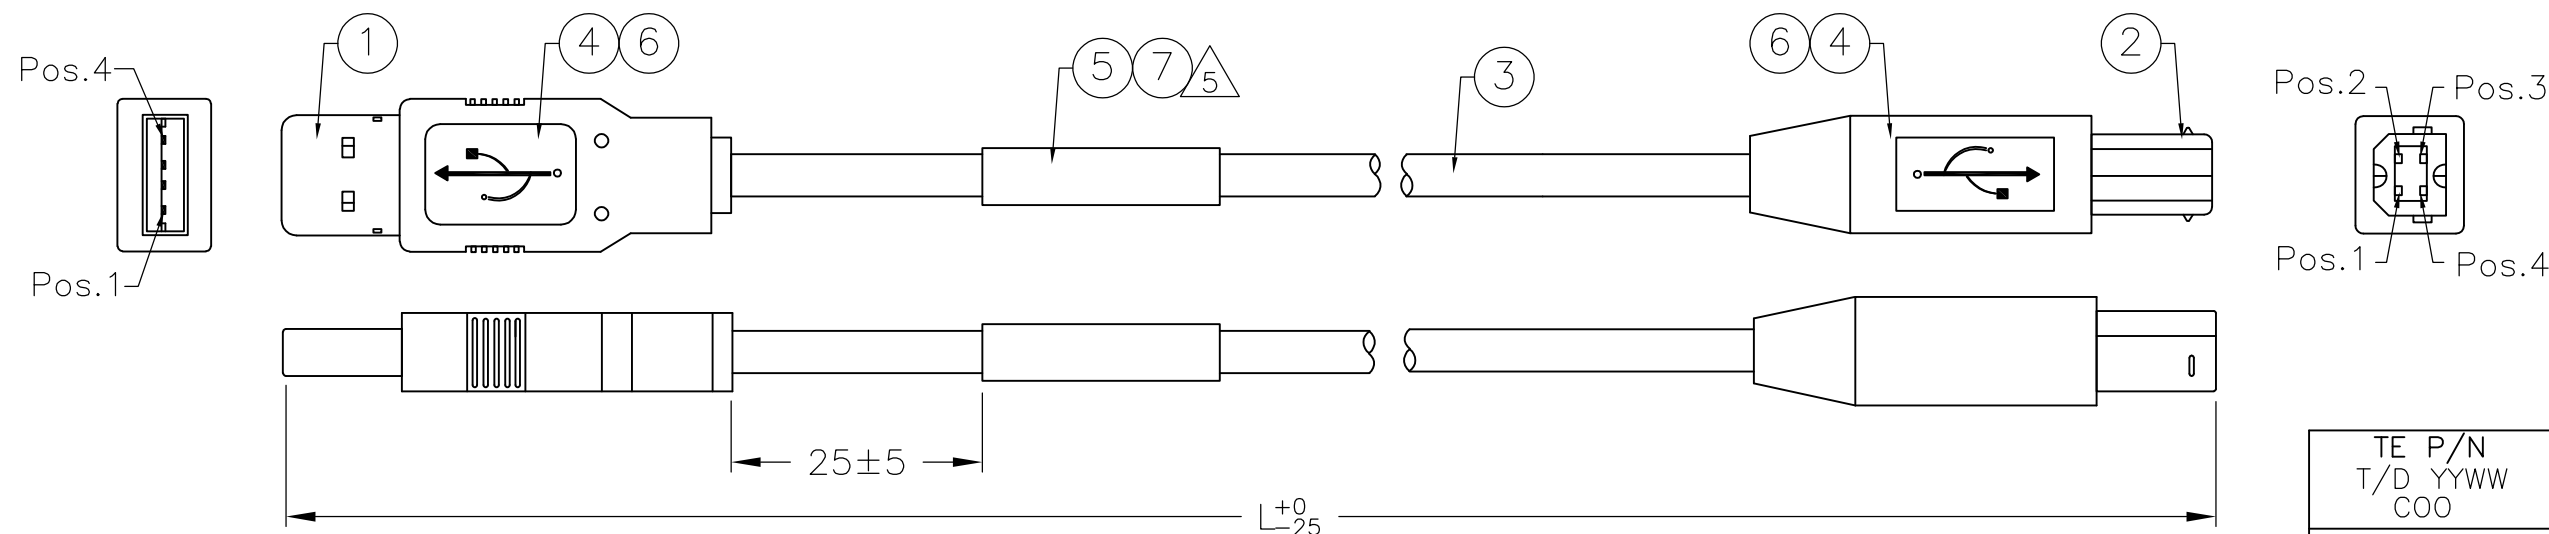


NOTES:

- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1000MM PER USB SPECIFICATIONS.
- △5 TO USE AT MEXICO FACTORY.

PART NO.	1487586-1	1487586-2	1487586-3	1487586-4
LENGTH(L)	500	250	162	310

QTY	1	1	1	1	PC	SBP LABEL, WHITE, 25.4 X 36.5mm	7
	AR	AR	AR	AR	MR	COPPER FOIL, W: 5MM	6
	1	1	1	1	PC	LABEL 25*35MM, WHITE: 25*13	5
	AR	AR	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4
	AR	AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+28AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	3
	1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
	1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
	-4	-3	-2	-1	U/M	DESCRIPTION	ITEM

PIN ASSIGNMENT :

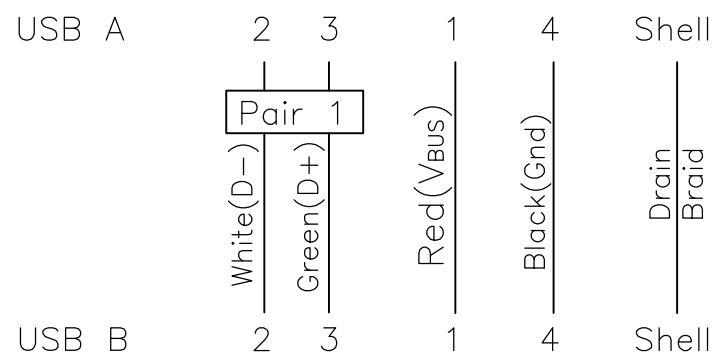

PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS ENVIRONMENTAL STANDARD TEC-138-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
MATERIAL	FINISH
-	-

DWN BOVEY LIU 25FEB02	 TE Connectivity	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
CHK J.HUNT 25FEB02		A3	00779	C-1487586	-	
APVD J.HUNT 25FEB02		SCALE	N.T.S	SHEET	1 OF 1	REV
PRODUCT SPEC		CUSTOMER DRAWING		H		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1487586-3](#)