


**Altera™**  
**MT2000**  
**Modified, Medical Grade, Polyolefin,**  
**Heat - Shrinkable Tubing**

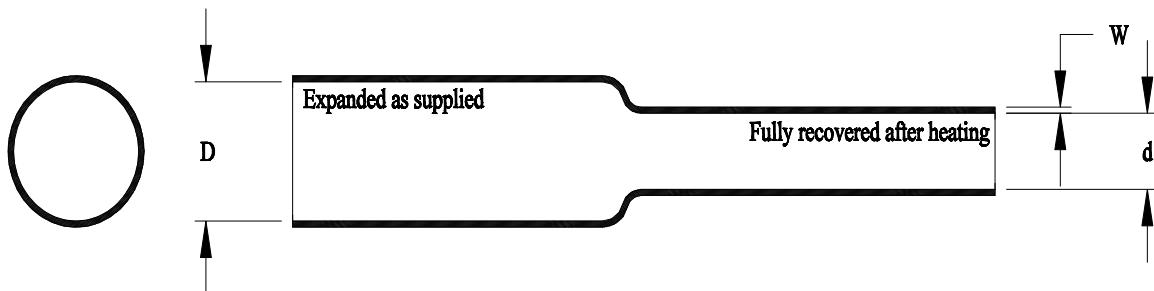

This specification covers the requirements for one type of single wall, electrical insulating, extruded tubing whose diameter will reduce to a predetermined size upon application of heat in excess of 140°C (284°F).

The tubing is fabricated from modified polyolefin crosslinked by irradiation. It shall be homogenous and essentially free from flaws, defects, pinholes, seams, cracks or inclusions.

The tubing is fabricated from materials which meet the requirements of U.S. Pharmacopeia Class VI Plastics. Color shall be black or clear unless otherwise specified.

**Table 1: Dimensions**

Size	As Supplied		Recovered						
	Inside Diameter Minimum (D)		Inside Diameter Maximum (d)		Wall Thickness (Inches, Millimeters) (W)			Nominal	
	mm.	in.	mm.	in.	Minimum	Maximum			
1mm	1.0	.040	0.45	.018	.008	0.20	.012	.30	.010 .25
2mm	2.0	.080	0.80	.032	.008	0.20	.012	.30	.010 .25
3mm	3.0	.120	1.20	.048	.008	0.20	.012	.30	.010 .25
6mm	6.0	.240	2.4	.096	.008	0.20	.012	.30	.010 .25
10mm	10.0	.400	4.0	.160	.012	0.30	.016	.41	.014 .36

**Specification Control Drawing**

 <b>TE</b> <i>connectivity</i>	<b>TE Connectivity</b> 300 Constitutional Drive Menlo Park, CA 94025 USA	<b>Raychem</b>	Title: <b>Altera™ MT2000</b> <b>Modified, Medical Grade, Polyolefin,</b> <b>Heat - Shrinkable Tubing</b>
TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application	Document No : <b>MT2000</b>		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 11MAY11
			Rev.: B1
			Sheet: 1 of 2

**Table 2: Properties**

Property	Unit	Requirement	Test Method
<b>PHYSICAL</b>			
* Dimensions	Inches (mm)	In accordance with Table 1	
* Longitudinal Change	Percent	0, -10	ASTM D 2671
* Concentricity as supplied	Percent	60 minimum	ASTM D 2671
Tensile Strength	PSI (MPa)	3000 minimum (20.7)	ASTM D 2671,
Ultimate Elongation	Percent	200 minimum	2"/minute
Secant Modulus	PSI (MPa)	5.0 x 10 <sup>4</sup> minimum (344)	ASTM D 2671
Heat Resistance 168 hours at 125°C (257 °F) Followed by test for: Ultimate Elongation	Percent	200 minimum	ASTM D 2671, 2"/minute
<b>ELECTRICAL</b>			
Dielectric Strength	Volts/mil (volts/mm)	1000 minimum (39.36)	ASTM D 2671
Dielectric Withstand 3000V, 60 Hz	sec	60 minimum	ASTM D 2671
<b>CHEMICAL</b>			
Fluid Resistance 24 hours at 23 ± 3°C (77 ± 5°F) Isopropyl Alcohol 5% Saline Solution Cidex** Followed by tests for: Dielectric Strength	Volts/mil (volts/mm)	1000 minimum (39.36)	ASTM D 2671
Tensile Strength	PSI (MPa)	3000 minimum (20.7)	ASTM D 2671
Heavy Metals Analysis Cadmium Mercury Lead Bismuth Antimony	ppm	1 maximum (total of all metals)	USP XXII Physicochemical Tests-Plastics (Note 1)

\* Denotes lot acceptance test

\*\*Trademark of Johnson &amp; Johnson Company

Note 1: Sample preparation and extraction is per USP XXII. Metals analysis may be colorimetric as described in USP XXII or by equivalent quantitative analytical method.

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.

Rev. Date: 11MAY11	Rev.: B1	Document No. <b>MT2000</b>	Sheet: 2 of 2
-----------------------	-------------	-------------------------------	------------------

Print Date: 11-May-11 If this document is printed it becomes uncontrolled. Check for the latest revision.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MT2000-6.0-6-SP](#)