



ESQT-125-02-L-Q-465

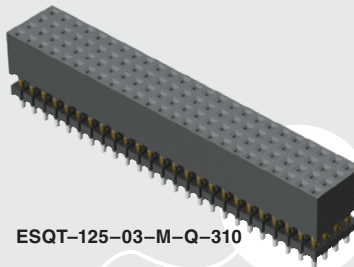

ESQT-125-03-M-Q-310

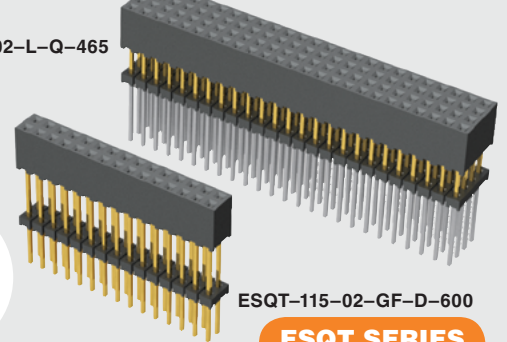

ESQT-115-02-GF-D-600

ESQT SERIES

(2.00 mm) .0787"

FLEXIBLE ELEVATED SOCKET STRIPS

SPECIFICATIONS

For complete specifications see www.samtec.com?ESQT

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

Sn or Au over

50 μ" (1.27 μm) Ni

Current Rating (ESQT/TMMH):

4.5 A per pin

(2 pins powered)

Operating Temp Range:

-55 °C to +125 °C

Insertion Depth:

(2.62 mm) .103" to

(5.03 mm) .198" with

(0.38 mm) .015" wiper

Max Cycles:

100 with 10 μ" (0.25 μm) Au

RoHS Compliant:

Yes

Lead-Free Solderable:

Yes, for -S, -D & -Q


(Wave only for -T, -5 & -6)

Board Mates:


TMMH, TMM, MTMM, MMT, TW, LTMM, ZLTMM, ESQT, PTT, TSH, TMMS

Cable Mates:

TCMD

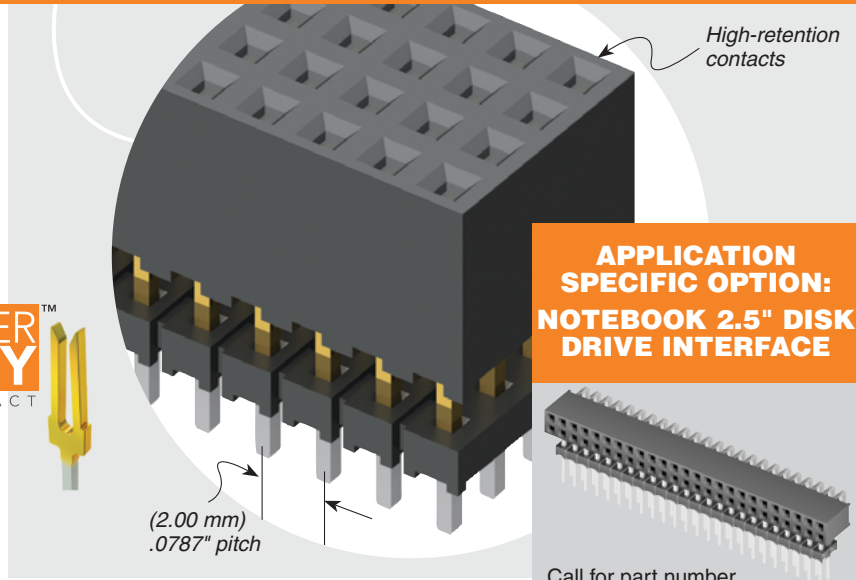

APPLICATION SPECIFIC OPTION: NOTEBOOK 2.5" DISK DRIVE INTERFACE



Call for part number.

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: This Series is non-standard, non-returnable.

Other Solutions

Surface Mount
See SQW and TLE Series.



Low Profile
See CLT Series.

High Reliability
See SMM Series.

Right-Angle
See SQW Series.

PC/104-Plus™ Sockets
See ESQT-368 and PTHF Series.

ESQT	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	BODY HEIGHT	OTHER OPTION
			Specify LEAD STYLE from chart	-F = Gold flash on contact, Matte Tin on tail	-S = Single Row	-“XXX” = Body Height (in inches)	-“XXX” = Polarized Position (Indicate position number)
		02 thru 50		-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail	-D = Double Row	(7.87 mm) .310" minimum for -S, -D, -Q	
				-M = 20 μ" (0.51 μm) Gold on contact, Matte Tin on tail	-T = Triple Row	(9.53 mm) .375" minimum for -T, -5, -6	
				-GF = 15 μ" (0.38 μm) Gold on contact, Gold flash on tail (Recommended for self-nesting) (-02 lead style only)	-Q = Quad Row		
					-5 = Five Row		
					-6 = Six Row		

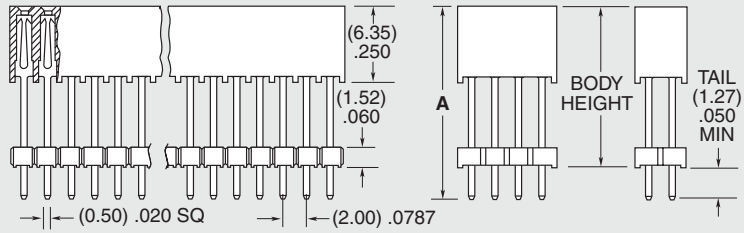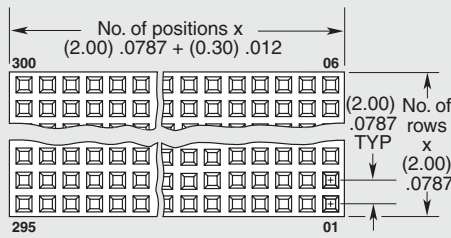

OTHER SOLUTIONS

Paste In Hole (PIH) processing. Contact Samtec ASP Group. (Not recommended for stack through applications)

LEAD STYLE	A	MAX TAIL	MAX BODY HEIGHT
-02	(21.59) .850	(13.72) .540	(20.32) .800
-03	(11.63) .458	(3.76) .148	(10.36) .408

Due to technical progress, all designs, specifications and components are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[ESQT-130-03-G-Q-368](#) [ESQT-130-02-G-Q-368](#) [ESQT-130-03-M-Q-368](#) [ESQT-130-02-GF-Q-368](#) [ESQT-104-02-F-D-500](#) [ESQT-120-02-L-D-750](#) [ESQT-110-02-GF-D-400](#) [ESQT-117-02-F-D-500](#) [ESQT-110-02-F-D-500](#) [ESQT-130-02-M-Q-368](#) [ESQT-125-02-F-D-500](#) [ESQT-105-02-G-D-525](#) [ESQT-120-02-F-D-500](#) [ESQT-110-03-L-D-310](#) [ESQT-105-02-F-D-500](#) [ESQT-105-02-F-D-750](#) [ESQT-110-02-G-D-760](#) [ESQT-105-02-G-D-390](#) [ESQT-110-02-L-D-750](#) [ESQT-108-03-F-D-310](#) [ESQT-112-03-L-D-374](#) [ESQT-112-03-G-D-310](#) [ESQT-120-03-L-D-310](#) [ESQT-107-02-F-D-730](#) [ESQT-102-02-L-S-755](#) [ESQT-104-02-G-S-531](#) [ESQT-105-02-F-S-510](#) [ESQT-105-02-F-D-510](#) [ESQT-104-02-G-S-673](#) [ESQT-104-03-G-S-380](#) [ESQT-105-02-F-D-435](#) [ESQT-103-02-F-S-570](#) [ESQT-105-02-F-D-790](#) [ESQT-105-03-F-D-346](#) [ESQT-105-03-F-D-370](#) [ESQT-104-02-L-D-785](#) [ESQT-108-02-F-S-510](#) [ESQT-104-02-L-D-750](#) [ESQT-103-02-L-D-670](#) [ESQT-103-03-L-D-360](#) [ESQT-105-02-F-D-550](#) [ESQT-102-02-F-D-675](#) [ESQT-104-03-M-S-400](#) [ESQT-102-02-F-D-435](#) [ESQT-105-03-F-D-358](#) [ESQT-102-03-G-D-371](#) [ESQT-109-02-F-S-510](#) [ESQT-104-02-G-S-730](#) [ESQT-104-02-F-D-744](#) [ESQT-103-02-F-S-510](#) [ESQT-107-02-F-D-511](#) [ESQT-105-02-F-D-600](#) [ESQT-112-02-F-S-570](#) [ESQT-105-03-L-D-324](#) [ESQT-106-02-F-S-750](#) [ESQT-108-03-L-S-310](#) [ESQT-104-03-F-S-394](#) [ESQT-105-02-F-D-730](#) [ESQT-106-02-F-S-510](#) [ESQT-104-02-L-S-730](#) [ESQT-103-03-F-T-375](#) [ESQT-102-02-F-S-510](#) [ESQT-105-02-F-D-675](#) [ESQT-103-02-F-D-675](#) [ESQT-107-03-F-D-368](#) [ESQT-110-02-F-S-750](#) [ESQT-106-03-F-D-360](#) [ESQT-103-02-L-D-450](#) [ESQT-106-03-F-D-368](#) [ESQT-104-02-G-S-620](#) [ESQT-104-02-M-S-435](#) [ESQT-108-03-F-S-368](#) [ESQT-110-02-F-S-630](#) [ESQT-108-02-L-D-562](#) [ESQT-120-03-G-D-327](#) [ESQT-110-02-M-Q-740](#) [ESQT-117-02-G-D-750](#) [ESQT-122-03-F-D-310](#) [ESQT-133-02-L-Q-725](#) [ESQT-122-03-F-D-350](#) [ESQT-113-02-L-D-680](#) [ESQT-130-03-G-Q-310](#) [ESQT-110-02-G-D-545](#) [ESQT-125-02-G-D-750](#) [ESQT-106-02-G-S-521](#) [ESQT-106-02-G-D-521](#) [ESQT-106-02-G-T-520](#) [ESQT-110-03-M-D-355](#) [ESQT-114-02-L-T-605](#) [ESQT-115-02-L-D-690](#) [ESQT-115-03-F-Q-355](#) [ESQT-116-02-F-D-520](#) [ESQT-116-02-G-D-400](#) [ESQT-116-02-G-D-720](#) [ESQT-116-03-F-S-338](#) [ESQT-116-03-G-D-310](#) [ESQT-117-02-L-D-520](#) [ESQT-118-02-F-Q-440](#) [ESQT-136-02-M-Q-710](#) [ESQT-136-03-F-S-365](#)