



REV.	DATE	DESCRIPTION
A	03/18/05	UPDATE DRAWING FORMAT

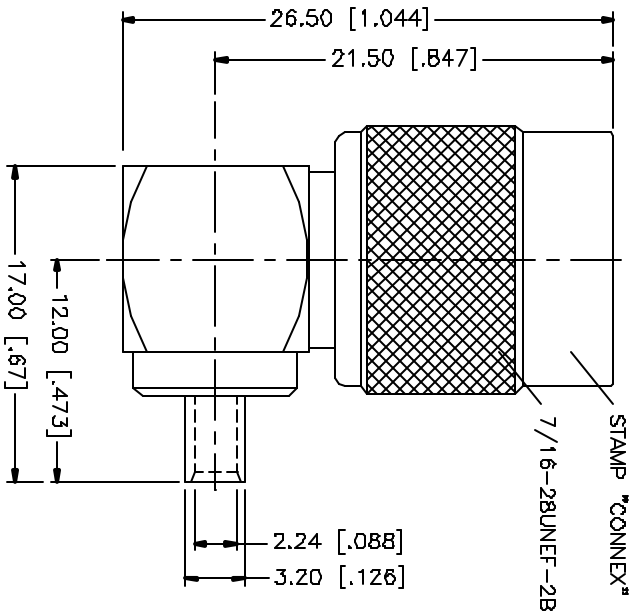

RECOMMENDED
CABLE STRIPPING DIM'S

					UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR DISTANCE REQUIRE DIM'S. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.25mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex TNC R/A DIRECT SOLDER PLUG (FOR .085", .086" CABLE) PART NO. 122420							
8						DRAWN	G.R.S.		03/18/05						
7						CHECKED									
6						ISSUED									
5						SHEET	1 OF 1								
4	CONTACT PIN	PHOS. BRONZE	GOLD	1											
3	INSULATOR	TEFLON	NATURAL	1											
2	BODY	BRASS	NICKCOTE	1											
1	SHELL	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											
DO NOT SCALE DRAWING					CAD FILE	C:/122/122420.DWG		DWG. NO.	122420.DWG	REV.	A	SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122420](#)