

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010897262](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Dual Row, Vertical, High Temperature, 26 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating, 2.72mm PC Tail

Documents:

| | |
|--------------------------------|---|
| 3D Model | Product Specification PS-70280-001 (PDF) |
| Drawing (PDF) | Packaging Specification PK-70873-0353-001 (PDF) |
| 3D Model (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification


| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|---|
| Product Family | PCB Headers |
| Series | 70280 |
| Application | Board-to-Board, Signal, Wire-to-Board |
| Overview | C-Grid Connector Products |
| Product Name | C-Grid |
| UPC | 800755021844 |

Physical

| | |
|--------------------------------|--------------------------------|
| Breakaway | Yes |
| Circuits (Loaded) | 26 |
| Circuits (maximum) | 26 |
| Color - Resin | Black |
| Durability (mating cycles max) | 50 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | None |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 1.699/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PC Tail Length | 2.79mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Bag |
| Pitch - Mating Interface | 2.54mm |
| Plating min - Mating | 0.381µm |
| Plating min - Termination | 2.032µm |
| Polarized to Mating Part | No |
| Polarized to PCB | No |
| Shrouded | No |
| Stackable | Yes |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Through Hole |

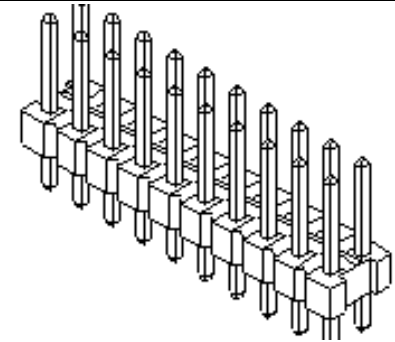

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[70280 Series](#)

Electrical

Current - Maximum per Contact 3.0A
Voltage - Maximum 250V

Solder Process Data

Lead-free Process Capability SMC&WAVE
Process Temperature max. C 260

Material Info

Engineering Number A-70280-0053

Reference - Drawing Numbers

Packaging Specification PK-70873-0353-001
Product Specification PS-70280-001
Sales Drawing SDA-70280-0001-4000-

This document was generated on 04/16/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[10-89-7262](#)