





NOTES:

- ROHS COMPLIANT
- 2. HEADER: DAP (DIALLYL PHTHALATE) WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
 - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e H1197FNL BECOMES H1197FNLT).







FINAL OUTLINE


@ Copyright, 2017. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/16/17)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFRM,SIN,100D,1:1,SM,TU	H1197FNL-13	PS-2005.002-D	1 OF 3	H1197FNL	В







ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHERWISE SPECIFIED (FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION.)

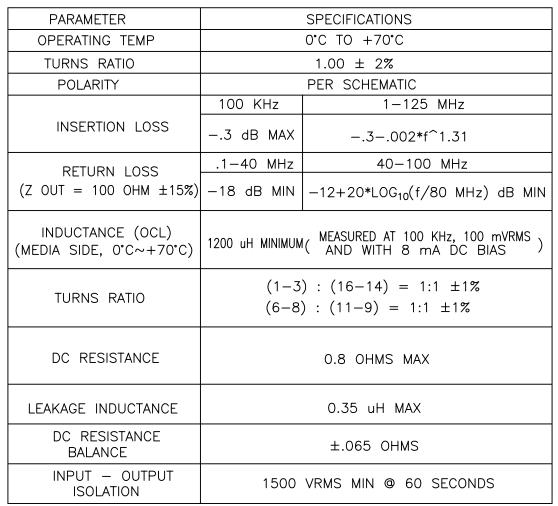

NOTE: f IS FREQUENCY IN MHz.







@ Copyright, 2017. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/16/17)


PRODUCT DESCRIPTION TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFRM,SIN,100D,1:1,SM,TU H1197FNL-13	PS-2005.002-D	2 OF 3	H1197FNL	В










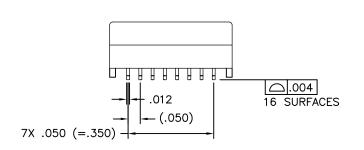

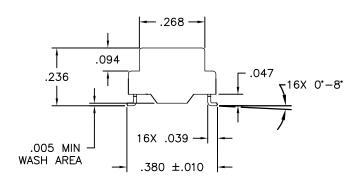

DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCES: ARE FOR REFERENCE ONLY. .XX= $\pm .01$.XXX= $\pm .005$

@ Copyright, 2017. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/16/17)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFRM,SIN,100D,1:1,SM,TU	H1197FNL-13	PS-2005.002-D	3 OF 3	H1197FNL	В

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

H1197FNLT