


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	UPDATE DRAWING FORMAT AND CHANGED MATERIAL SPECIFICATION NUMBER	11/14/18	J.B.	T.L.

PD-Caps Semirigid Polyolefin Heat-shrinkable End Caps

As Supplied

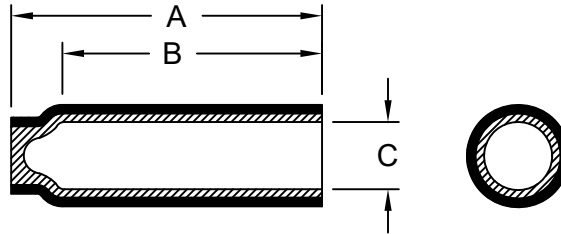

After Unrestricted Recovery

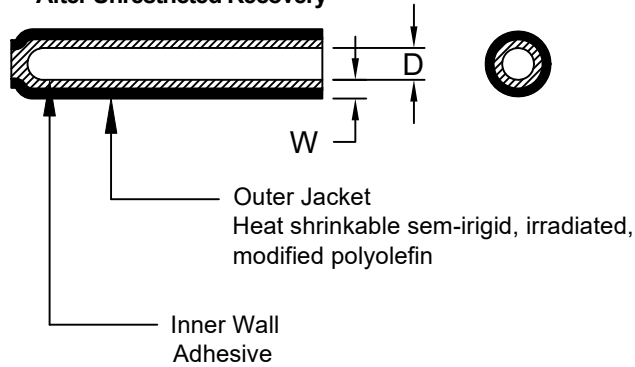


Table 1: Dimensions mm (inches)

Size	A Nominal	B Minimum	C Minimum	D Maximum	W Nominal
1/8	25.40 (1.000)	13.97 (0.550)	3.18 (0.125)	0.58 (0.023)	1.22 (0.048)
3/16	25.40 (1.000)	16.51 (0.650)	4.75 (0.187)	1.52 (0.060)	1.57 (0.062)
1/4	28.58 (1.125)	16.51 (0.650)	6.35 (0.250)	2.03 (0.080)	1.98 (0.078)
3/8	31.75 (1.250)	19.69 (0.775)	9.53 (0.375)	2.28 (0.090)	2.08 (0.082)
1/2	34.93 (1.375)	21.59 (0.850)	12.70 (0.500)	2.28 (0.090)	2.54 (0.100)

Color: Black

Specification: Formed from semirigid, encapsulant-lined polyolefin tubing per TEC-108-120027

THIS DRAWING IS UNPUBLISHED.
 ALL RIGHTS RESERVED.
 © COPYRIGHT 2018 TE Connectivity

DIMENSIONS: INCHES	DWN J. Bitter	10AUG2017	MATERIAL	FINISH		
	CHK T. Licko	-	TE Connectivity Ltd.			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD T. Licko	-			PD-Caps Semirigid Polyolefin Heat-Shrinkable End Caps	
	PRODUCT SPEC TEC-108-120027	NAME	SIZE A4	CAGE CODE 06090		
	APPLICATION SPEC -	WEIGHT -	CUSTOMER DRAWING		SCALE None	SHEET 1 OF 1