
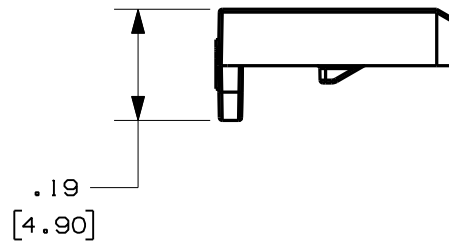

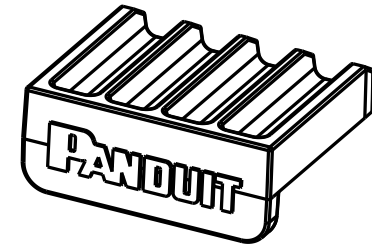


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

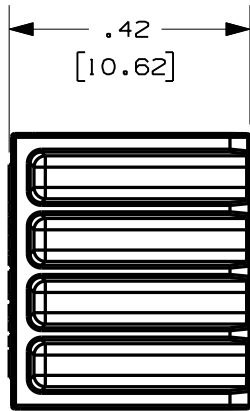

- NOTES:
1. [] DENOTE MILLIMETERS
 2. TEMPERATURE RANGE:
-40°F (-40°C) TO 120°F (60°C)
 3. RoHS COMPLIANT

										CAD FILENAME/LAYERS				100162B0_DC_C10948/05A				
										PANDUIT CORP. TINLEY PARK, ILLINOIS								
										PSL - PERM - USBA CUSTOMER DRAWING								
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .1 (.XX) ± .03					UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.			
										DRAWN BY JHAC		MAT'L: RED 33% GLASS FILLED NYLON			SCALE 2 : 1			
0	10/6/11	JHAC		DRAWING RELEASE			6533				DATE 10/06/11					DRAWING NO. C10948		DWG A
REV	DATE	BY	CHK	DESCRIPTION			ECN	-	R	CUST	SUP	CHK'D					SIZE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

PSL-PERM-USBA