

SPECIFICATION CONTROL DRAWING

55/2322TITLE TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED,
JACKETED, OUTER SPACE, 600 VOLT

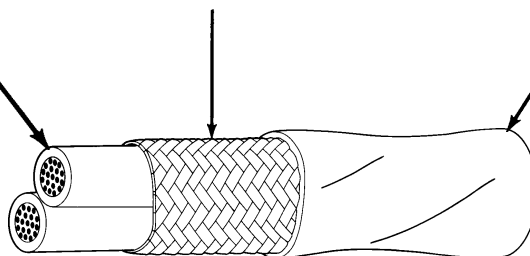
Date 7-16-06

Revision E

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

COMPONENT WIRES - 55/0312

SHIELD - SILVER-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004 in.)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/2322-28-*	28	.0015	.0040	.0050	.063	.067	3.69
55/2322-26-*	26	.0015	.0040	.0050	.072	.076	4.92
55/2322-24-*	24	.0015	.0040	.0050	.079	.083	5.98
55/2322-22-*	22	.0015	.0040	.0050	.096	.100	8.84
55/2322-20-*	20	.0015	.0045	.0055	.118	.122	12.99
55/2322-18-*	18	.0015	.0045	.0055	.137	.141	18.24
55/2322-16-*	16	.0015	.0045	.0055	.152	.156	22.45
55/2322-14-*	14	.0015	.0050	.0060	.182	.187	32.82
55/2322-12-*	12	.0015	.0055	.0065	.221	.226	48.55

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

JACKET ELONGATION: 50% (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

RADIATION RESISTANCE: 500 megarads

SHIELD COVERAGE: 90% (minimum)

VACUUM STABILITY:

Total Mass Loss (TML), 1.0% (maximum)

Volatle Condensable Material, 0.1% (maximum)

VOLTAGE WITHSTAND TEST (Post Environmental):

1500 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

1/ Example: AWG 26, black and white component wires:
white jacket: 55/2322-26-0/9-9

NOTE: Nominal values are for information only.
Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx") OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

tyco
Electronics

Raychem Wire & Cable
501 Oakside Avenue
Redwood City, CA 94063-3800
Phone: 1-800-227-8816
Fax: 1-650-361-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[55/2322-24-0/9-9](#) [55/2322-22-2/6-9CS2528](#) [55/2322-26-9/96-9](#) [55/2322-22-0/9-9CS2744](#) [55/2322-22-6/9-9CS2798](#)
[55/2322-20-2/6-9CS2528](#) [55/2322-24-6/9-9CS2798](#)