

Accessories - IC-DFR 8 - 1852082

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Accessories, Number of positions: 8, Pitch: 5.08 mm, Color: green, This assembly frame can only be used in combination with IC 2,5/...-STGF-5,08

Product Features

- Feed-through assembly frame for inverted COMBICON plug IC 2,5/-STGF-5,08
- Vibration-resistant screw connection for both plugs provided by screw flanges
- Up to a panel thickness of 1.5 mm, the frame can be screwed before the IC plug is mounted
- Fitting the MSTB 2,5/...-STF-5,08 plug from outside
- Snap-locking of the IC plug into the frame
- Frame in plate cutout can be used and screwed on.



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| GTIN |  4 017918 108960 |
| Weight per Piece (excluding packing) | 2.476 g |
| Custom tariff number | 39269097 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-------------|----------|
| Pitch | 5.08 mm |
| Dimension a | 35.56 mm |

General

Accessories - IC-DFR 8 - 1852082

Technical data

General

| | |
|--|---------------------|
| Range of articles | IC-DFR |
| Insulating material group | I |
| Nominal cross section | 2.5 mm ² |
| Insulating material | PA |
| Flammability rating according to UL 94 | V0 |
| Number of positions | 8 |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440210 |
| eCl@ss 9.0 | 27440210 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000879 |
| ETIM 4.0 | EC000879 |
| ETIM 5.0 | EC002310 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

Accessories

Accessories

Mounting material

Accessories - IC-DFR 8 - 1852082

Accessories

Screw set - DFK-MSTB-SS - 0708263



Screw set, for securing the header to the device wall, consists of an M3 x 10 screw, with a spring washer and a nut

PCB plug


Printed-circuit board connector - IC 2,5/ 8-STGF-5,08 - 1825569




Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 8, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

Drawings

Drilling diagram

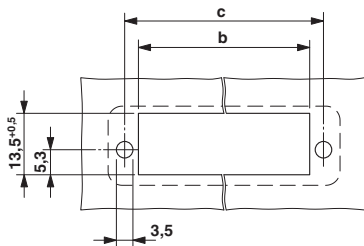

Dimensional drawing

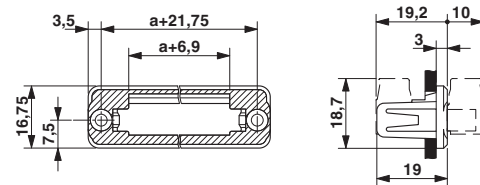

Dimension b: 10.84 mm + (no. of pos. x 5.08 mm)

Dimension c: Dim. b + 5.83 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1852082](#)