


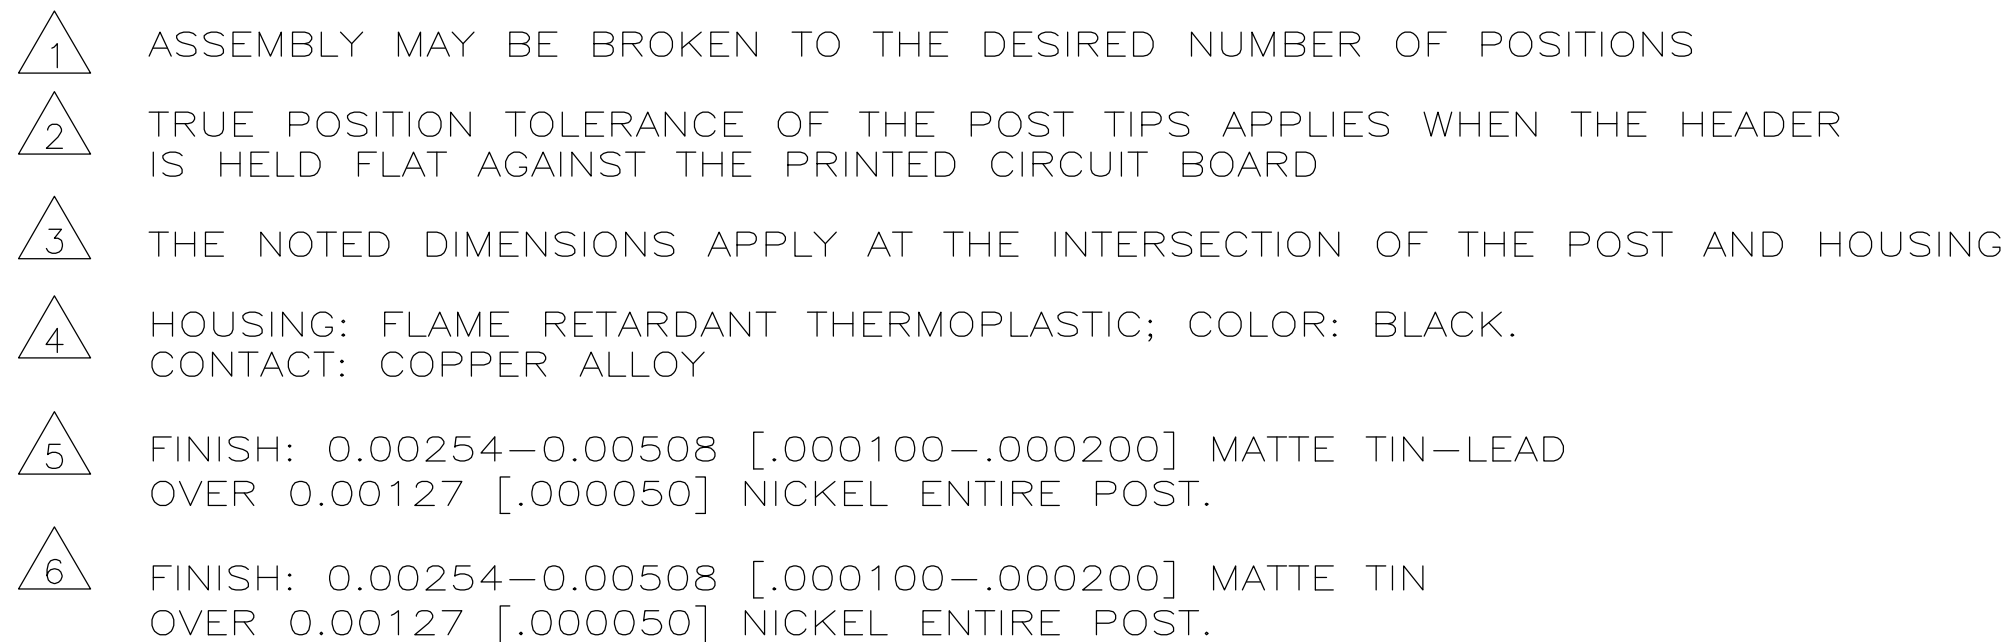

5	101.19 [3.984]	99.06 [3.900]	39	80	4-146483-0
5	98.65 [3.884]	96.52 [3.800]	38	78	3-146483-9
5	96.11 [3.784]	93.98 [3.700]	37	76	3-146483-8
5	93.57 [3.684]	91.44 [3.600]	36	74	3-146483-7
5	91.03 [3.584]	88.90 [3.500]	35	72	3-146483-6
5	88.49 [3.484]	86.36 [3.400]	34	70	3-146483-5
5	85.95 [3.384]	83.82 [3.300]	33	68	3-146483-4
5	83.41 [3.284]	81.28 [3.200]	32	66	3-146483-3
5	80.87 [3.184]	78.74 [3.100]	31	64	3-146483-2
5	78.33 [3.084]	76.20 [3.000]	30	62	3-146483-1
5	75.79 [2.984]	73.66 [2.900]	29	60	3-146483-0
5	73.25 [2.884]	71.12 [2.800]	28	58	2-146483-9
5	70.71 [2.784]	68.58 [2.700]	27	56	2-146483-8
5	68.17 [2.684]	66.04 [2.600]	26	54	2-146483-7
5	65.63 [2.584]	63.50 [2.500]	25	52	2-146483-6
5	63.09 [2.484]	60.96 [2.400]	24	50	2-146483-5
5	60.55 [2.384]	58.42 [2.300]	23	48	2-146483-4
5	58.01 [2.284]	55.88 [2.200]	22	46	2-146483-3
5	55.47 [2.184]	53.34 [2.100]	21	44	2-146483-2
5	52.93 [2.084]	50.80 [2.000]	20	42	2-146483-1
5	50.39 [1.984]	48.26 [1.900]	19	40	2-146483-0
5	47.85 [1.884]	45.72 [1.800]	18	38	1-146483-9
5	45.31 [1.784]	43.18 [1.700]	17	36	1-146483-8
5	42.77 [1.684]	40.64 [1.600]	16	34	1-146483-7
5	40.23 [1.584]	38.10 [1.500]	15	32	1-146483-6
5	37.69 [1.484]	35.56 [1.400]	14	30	1-146483-5
5	35.15 [1.384]	33.02 [1.300]	13	28	1-146483-4
5	32.61 [1.284]	30.48 [1.200]	12	26	1-146483-3
5	30.07 [1.184]	27.94 [1.100]	11	24	1-146483-2
5	27.53 [1.084]	25.40 [1.000]	10	22	1-146483-1
5	24.99 [.984]	22.86 [.900]	9	20	1-146483-0
5	22.45 [.884]	20.32 [.800]	8	18	146483-9
5	19.91 [.784]	17.78 [.700]	7	16	146483-8
5	17.37 [.684]	15.24 [.600]	6	14	146483-7
5	14.83 [.584]	12.70 [.500]	5	12	146483-6
5	12.29 [.484]	10.16 [.400]	4	10	146483-5
5	9.75 [.384]	7.62 [.300]	3	8	146483-4
5	7.21 [.284]	5.08 [.200]	2	6	146483-3
5	4.67 [.184]	2.54 [.100]	1	4	146483-2
5	2.13 [.084]	—	—	2	146483-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. HOFFMAN	1/19/96	 TE Connectivity	
		CHK G. DUBNICZKI	3/18/96		
DIMENSIONS: mm [INCHES]		APPROV G. DUBNICZKI		NAME	
		PRODUCT SPEC		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED	
		APPLICATION SPEC			
		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT		A1 00779	
MATERIAL		CUSTOMER DRAWING		SCALE	4:1
SEE TABLE				SHEET	1 of 1
				REV	B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146483-8](#)