

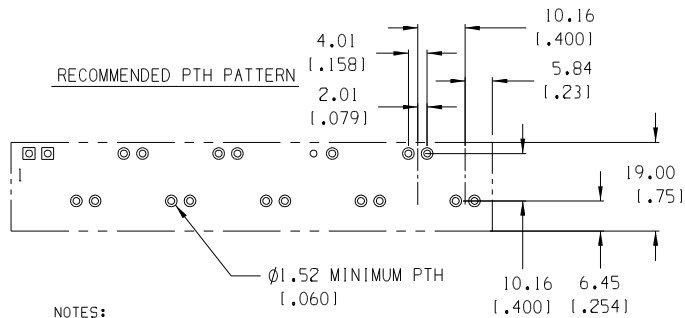
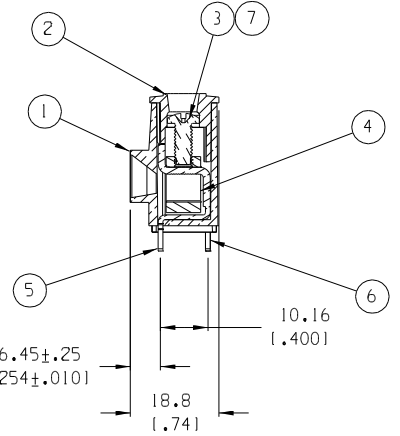


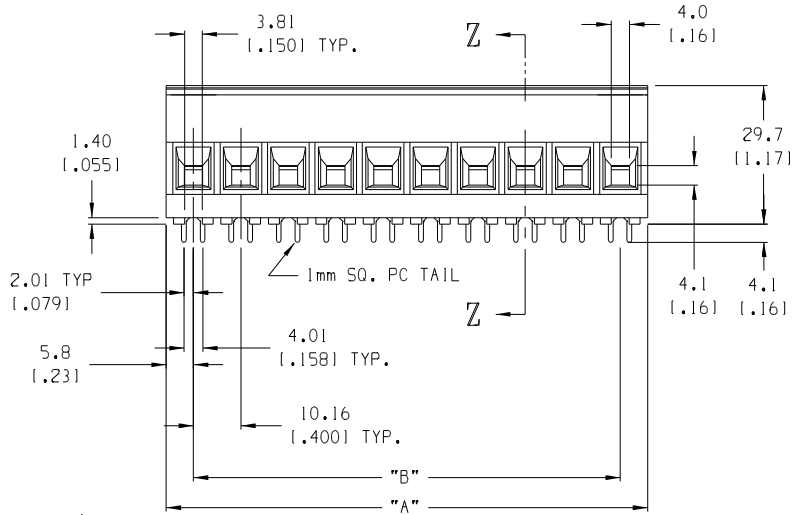

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPECIFICATION: NOT REQUIRED
 4. PACKAGING: NOT REQUIRED
 5. MATES WITH: NONE
 6. PART IS DESIGNED TO MEET UL 1059 CLASS C 600V, 40A
 7. STAGGERED PC TAIL POSITION ON ALTERNATE CIRCUITS
 8. "XX" REFERS TO NUMBER OF CIRCUITS
 9. FOR OPTIONAL IMPRINTING, REFER TO SD-38120-005

7	XX	SCREW, M4, #2 POZI-SLOT, ST. STEEL	ST. STEEL	TIN
6	A/R	REAR TERMINAL	COPPER	TIN
5	A/R	FRONT TERMINAL	COPPER	TIN
4	XX	CAGE	BRASS	NICKEL
3	XX	SCREW, M4, #2 POZI-SLOT, BRONZE	BRONZE	TIN
2	I	COVER	THERMOPLASTIC	BLACK
1	I	BODY	THERMOPLASTIC	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

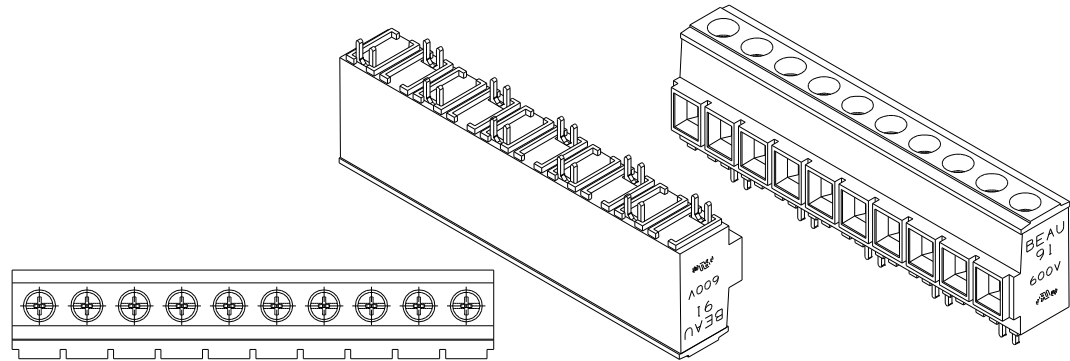

SECTION Z-Z

ECN NO. 4261 RK 10-7-05 DRAWN: CH:K APPR: D	DESCRIPTION MAJOR CRITICAL C	QUALITY SYMBOLS	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 1:1	DESIGN UNITS ☐ mm ☒ INCH		 THIRD ANGLE PROJECTION	☒ mm INCH ☐ INCH mm ☐ mm ONLY	REVISE ON CAD ONLY		
		mm INCH		DRAWN BY & DATE R.STONE 9-13-00		TITLE: SR BTS 8 AWG ASSY, 600V 40 A						
		4 PLACES		±.0015		CHECKED BY & DATE R.KEMP 9-13-02						
		3 PLACES		±.038 ±.005		APPROVED BY & DATE L. ROTHBAUS 9-27-02		 MOLEX INCORPORATED				
		2 PLACES		±.13 ±.01		CAD FILENAME 9135XX		MATERIAL NO. SEE CHART		DRAWING NO. SD-39910-002		SHEET NO. 1 OF 2
		1 PLACE		±.3		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE B		
		ANGULAR: ±2°										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[39910-0609](#)