

18 Series

RoHS
Compliant


NYLON 6.6

GENERAL PURPOSE

MATERIAL OPERATING TEMPERATURE: -40°C to +85°C

APPLICATION OPERATING TEMPERATURE: -10°C to +85°C

APPROVALS¹: 

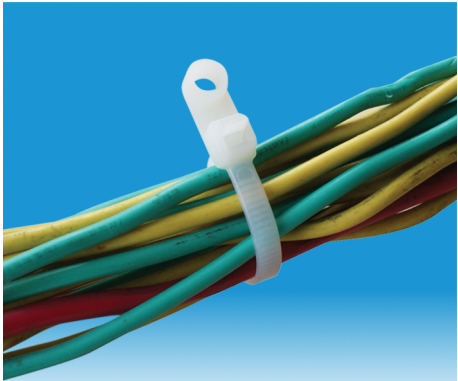

Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]	Fastener
M - 18lb					
18-M110	2.5 [.098]	110 [4.3]	19.0 [0.75]	8 [18]	M2.5 [#4]
I - 40lb					
18-I150	3.6 [.14]	150 [6.0]	35.5 [1.40]	18 [40]	M4 [#8]
S - 50lb					
18-S160	4.8 [.189]	160 [6.3]	36.8 [1.45]	22 [50]	M5 [#10]
18-S200	4.8 [.189]	200 [8.0]	49.8 [1.96]	22 [50]	M5 [#10]
18-S305	4.8 [.189]	305 [12.0]	82.8 [3.26]	22 [50]	M5 [#10]
18-S370	4.8 [.189]	370 [14.5]	103.8 [4.09]	22 [50]	M5 [#10]
HD - 120lb					
18-HD305	7.6 [.300]	305 [12.0]	78.7 [3.10]	55 [120]	M6 [#1/4]
18-HD400	7.6 [.300]	400 [15.7]	109.2 [4.30]	55 [120]	M6 [#1/4]

Notes:
1. 18-M110, is not UL approved

PART NUMBER SYSTEM

18 - HD 400 B - C

SERIES

CROSS SECTION

LENGTH

MATERIAL/COLOR


N: Natural

B: Normal UV Black

PACKAGE SIZE

C: 100PCS

Number: Other Quantity

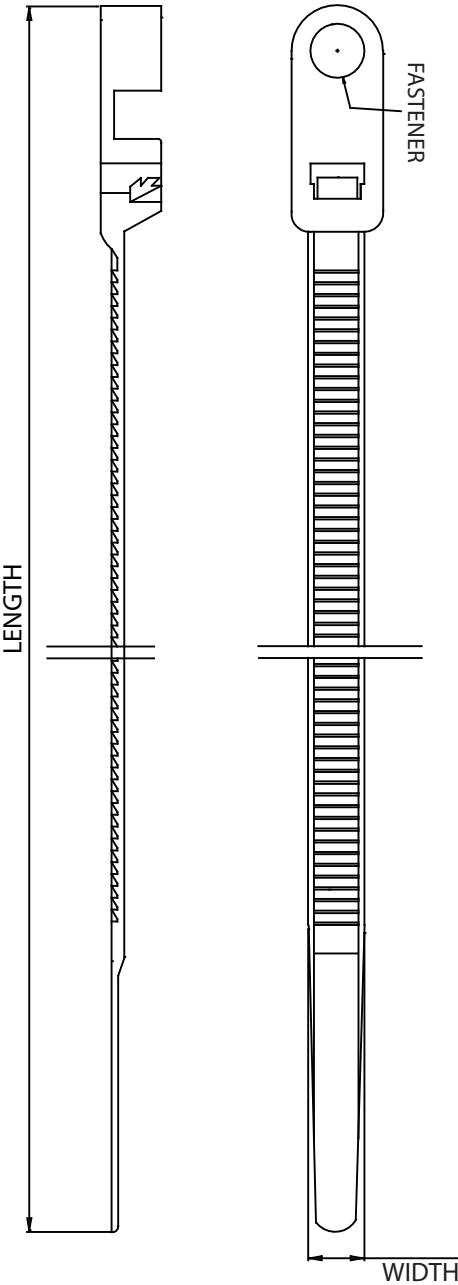

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qualtek:

[18-HD305B-C](#) [18-HD305N-C](#) [18-HD400B-C](#) [18-I150B-C](#) [18-I150N-C](#) [18-S160B-C](#) [18-S200B-C](#) [18-S200N-C](#) [18-S305B-C](#) [18-S305N-C](#) [18-S370B-C](#) [18-S370N-C](#) [18-HD400N-C](#) [18-M100B-C](#) [18-M100N-C](#) [18-S160N-C](#)