
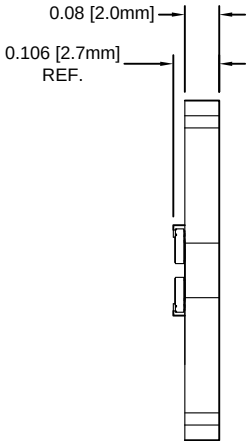


REV.	DESCRIPTION	DATE	APPROVED
F	Corrected Board Thickness	04/01/14	J. C.
G	Engineering Release	04/01/14	J. C.
H	Removed BOM	08/09/16	J. C.

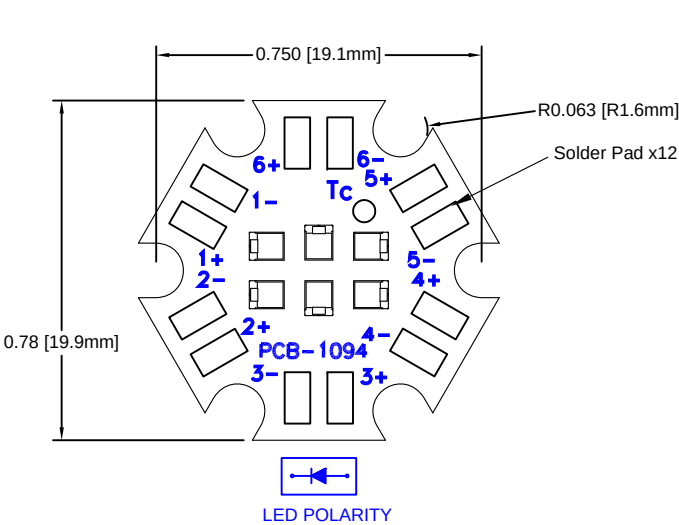

ORDERING INFORMATION

L24-ZESXXXXK6

CORRELATED COLOR TEMPERATURE
IN KELVIN

Table 1: Assembly Configurations					
Part Number	LED P/N	Color	CCT (K)	Typical Luminous Flux (lm)	Philips Lumileds P/N Reference
L24-ZES3000K6	BDL-1520	Warm White	3000	720	LX22-3090-5
L24-ZES5700K6	BDL-1523	Cool White	5700	1200	LX22-5770

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL.: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°		TITLE: L24 Starboard Light Engine
.XX ± .02			
.XXX ± .010			
DESIGNED: B. Oliver	DATE: 11/07/13	PART NO: L24-ZESXXXXK6	REVISION: H
CHECKED: J. Chiang	DATE: 11/07/13	CAGE CODE : 32559	SHEET # 1 OF 1
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

BIVAR:

[L24-ZES5700K6](#) [L24-ZES3000K6](#)