


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	C	REVISED PER ECR-16-003314		15JUL2016	BW	GJ	

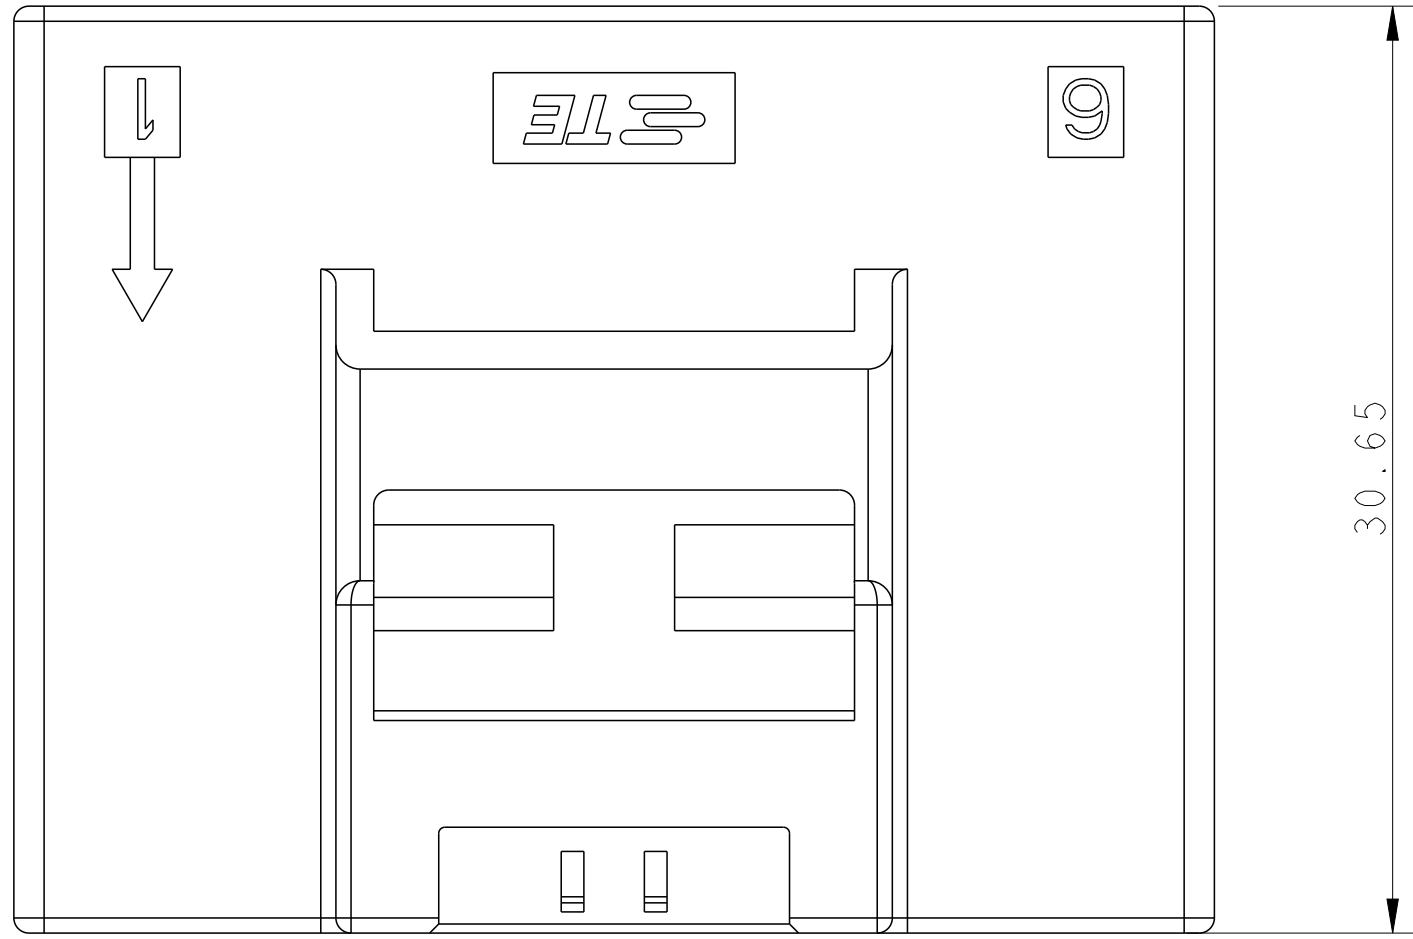

△ MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW





LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

△ MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

4 MATING CONN, P/N
PLUG HSG:*-1971776-
TPA(LOCK PLATE):*-1971778-*



5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

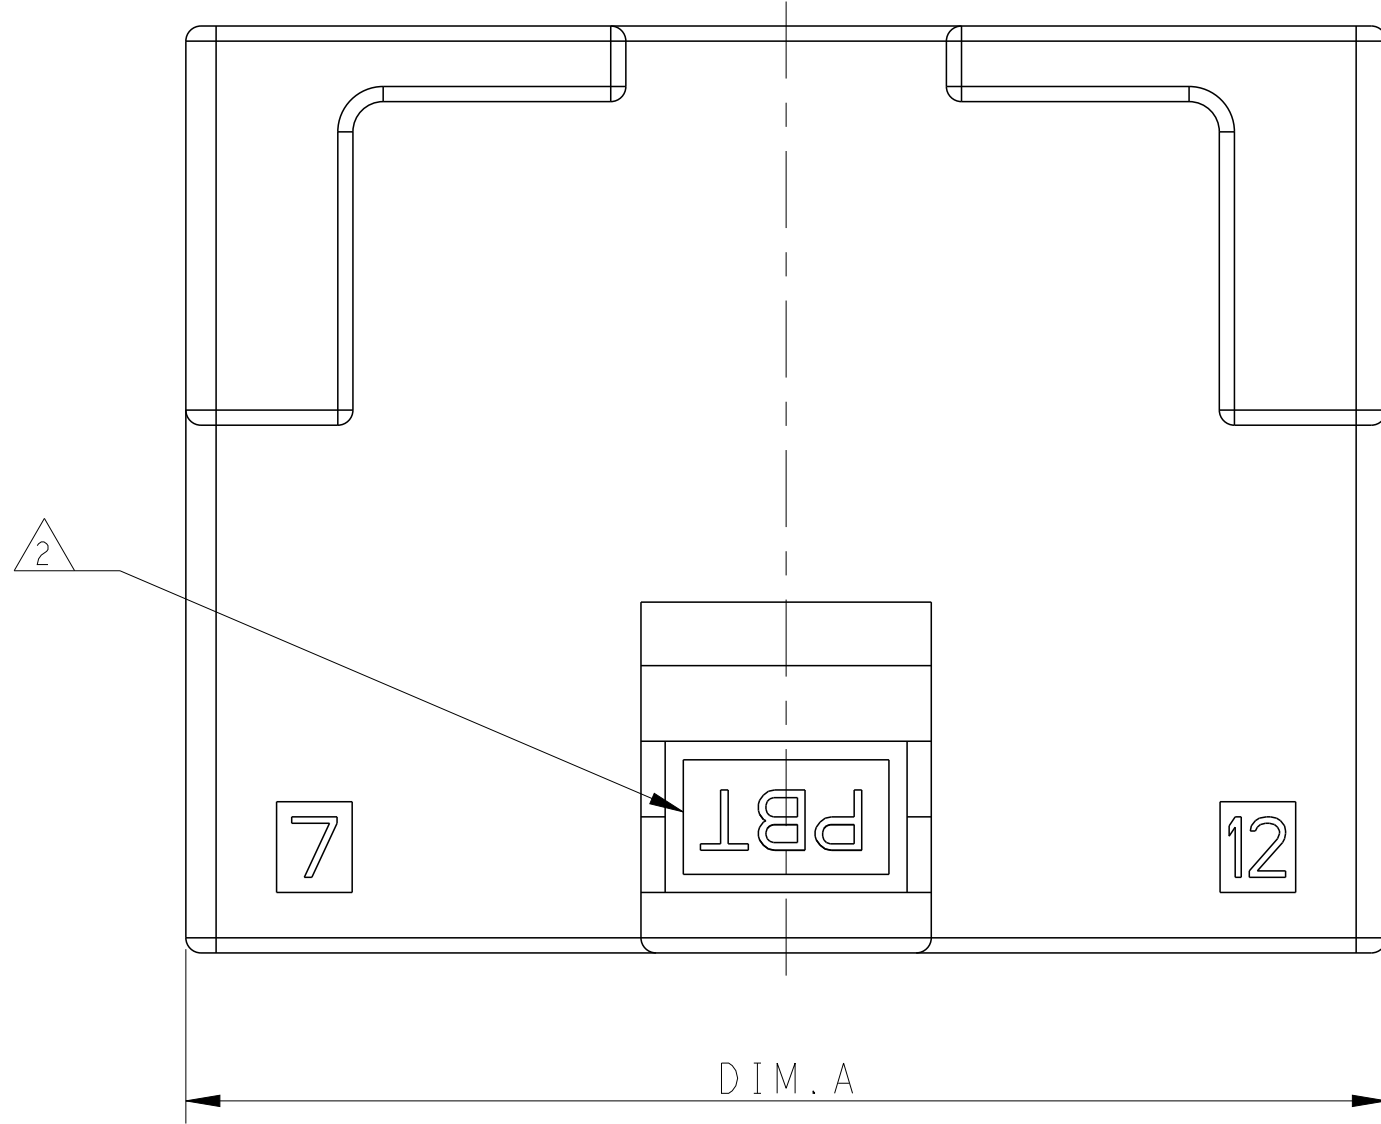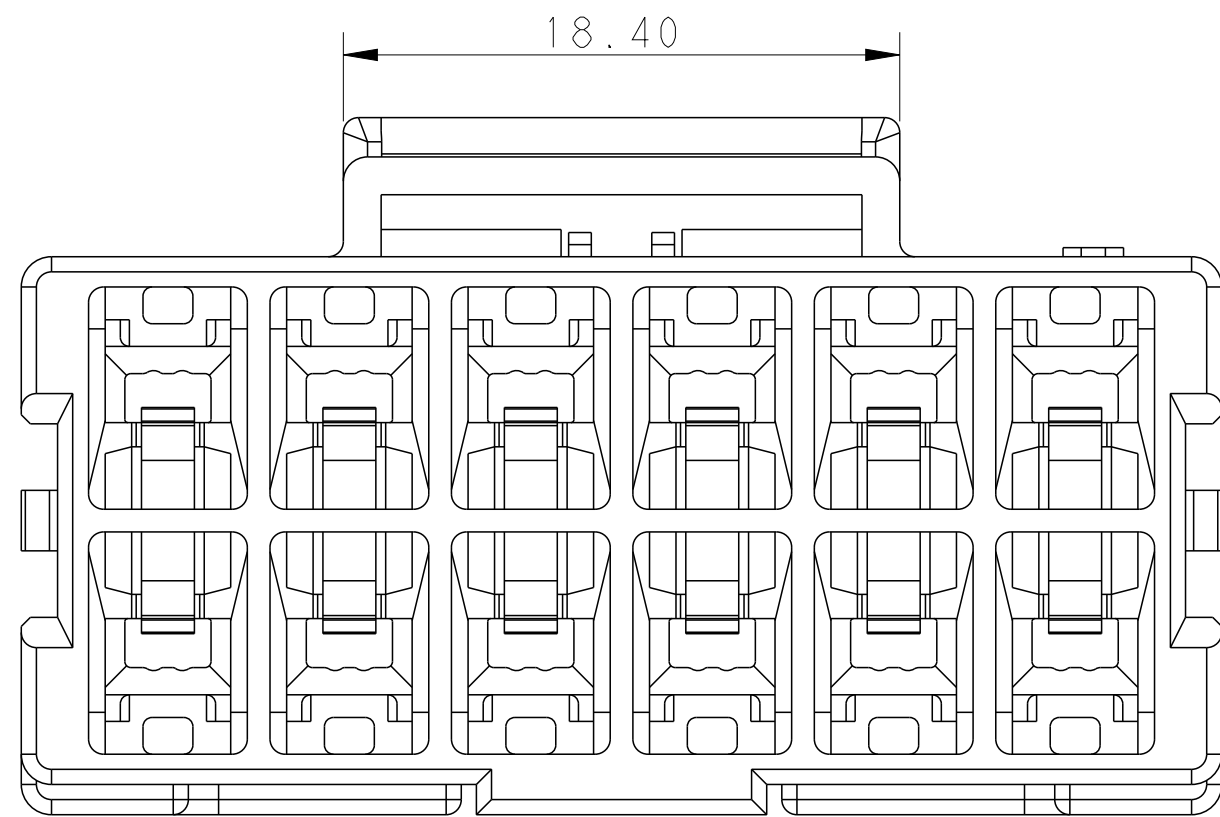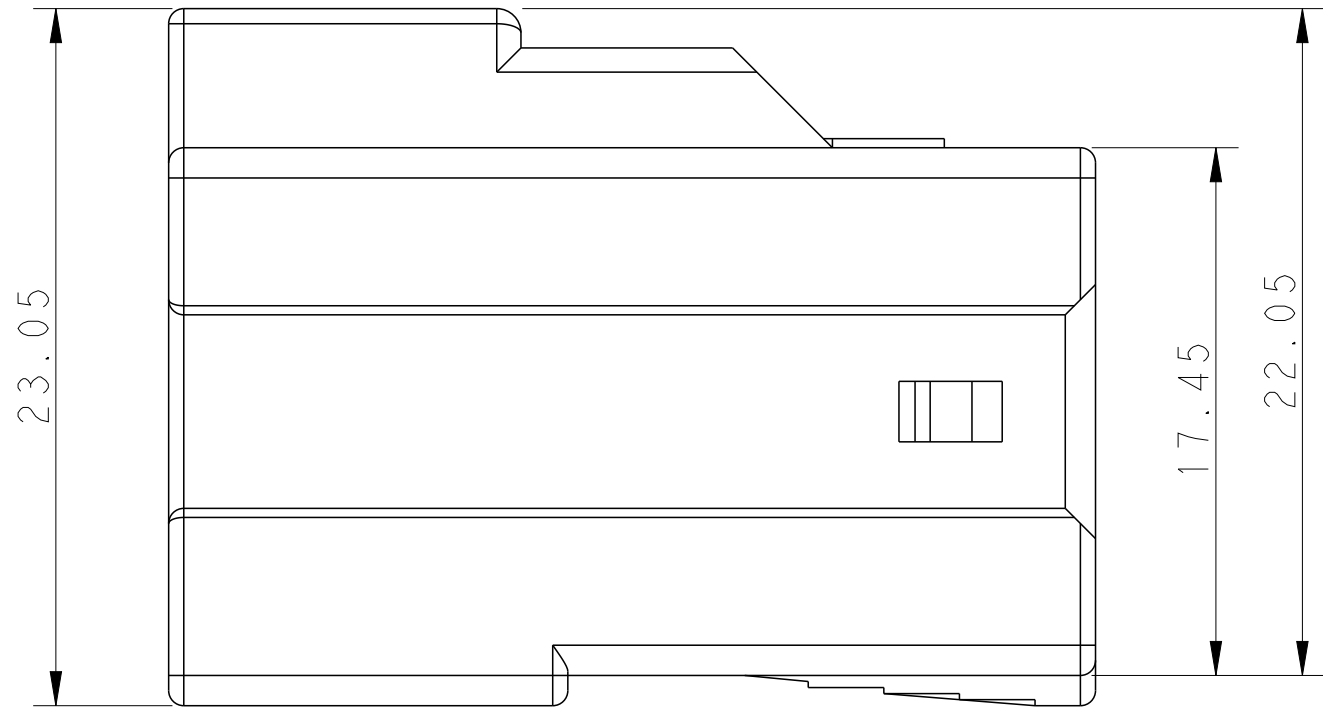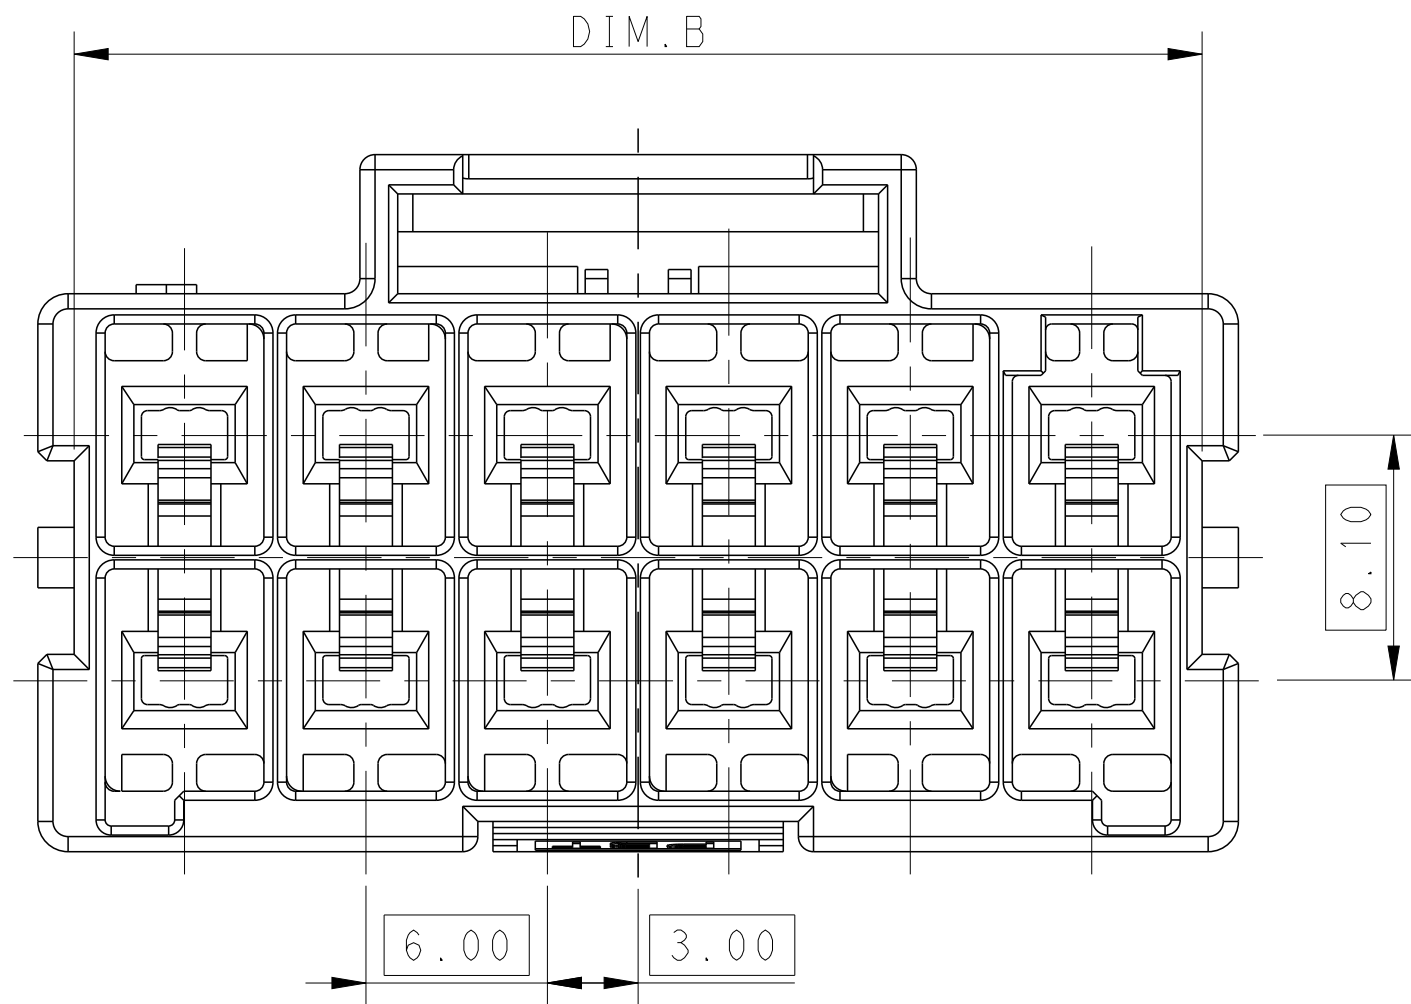



POS.	DIM.A	DIM.B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity					
		CHK HAPYE WU 09JUL2012						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME YUHONG MAO 09JUL2012	CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK				
		0 PLC ±:	PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118					
		1 PLC ±0.35						
		2 PLC ±0.25						
		3 PLC ±:						
4 PLC ±:	ANGLES ±:							
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
	-	-	A1	100779	C=1971774	-		
Customer Drawing			SCALE	-	SHEET	1 OF 2	REV	C



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

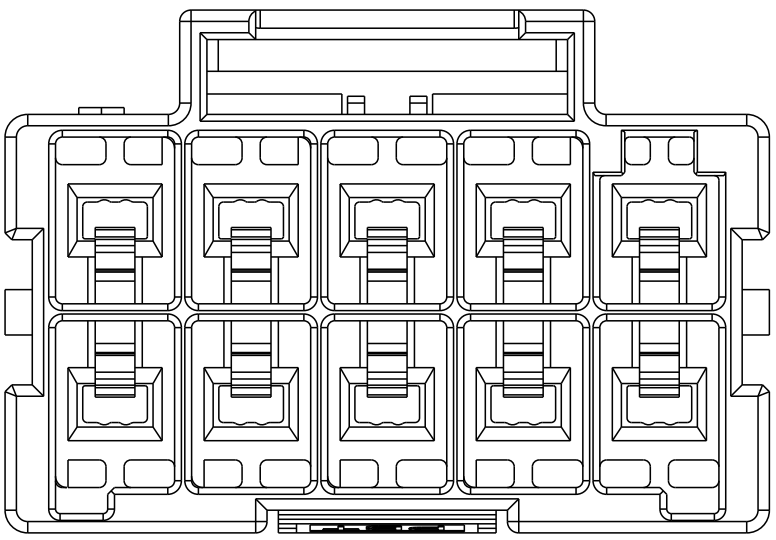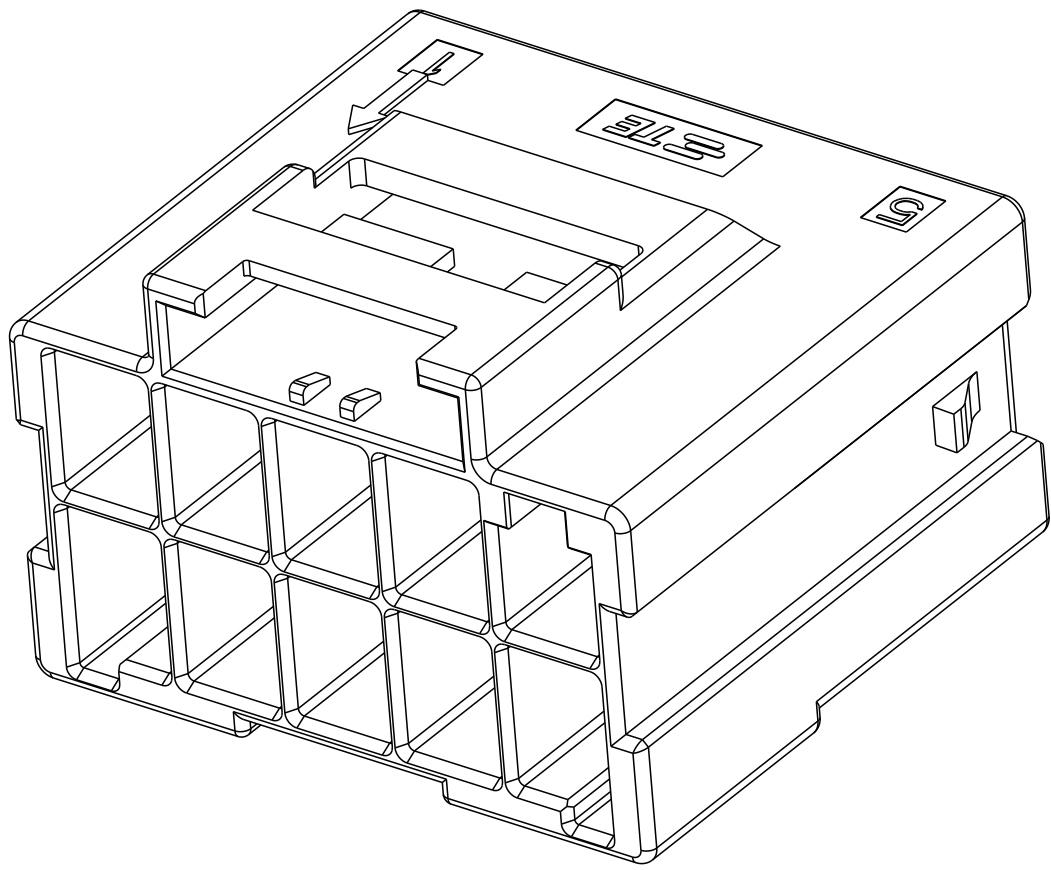


2*5 POSITIONS

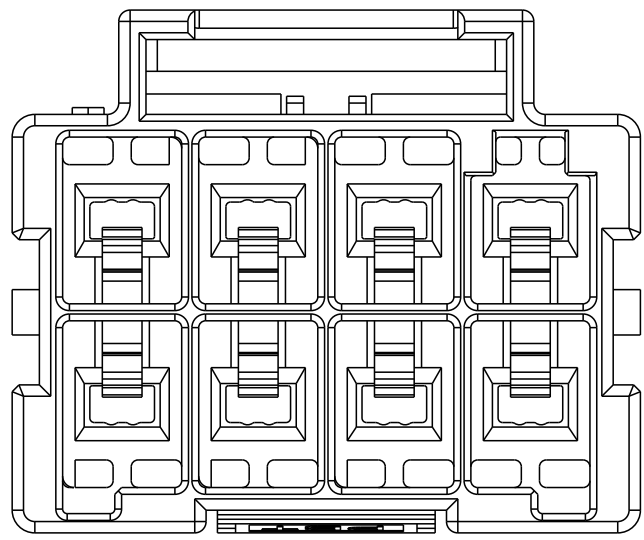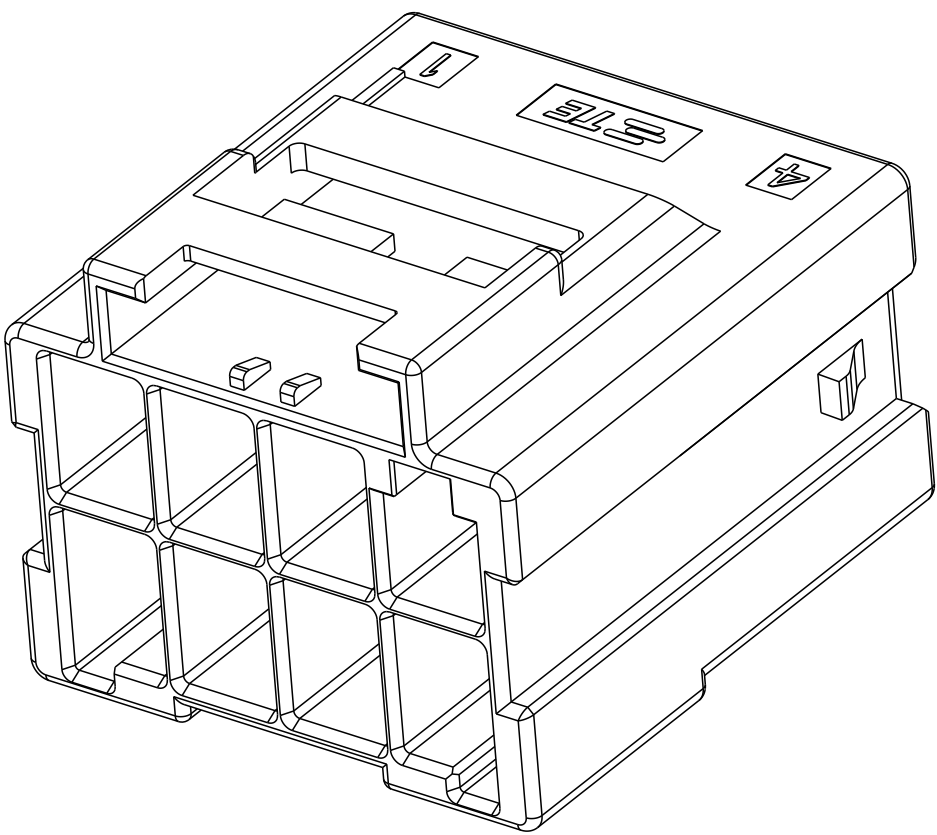


2*4 POSITIONS

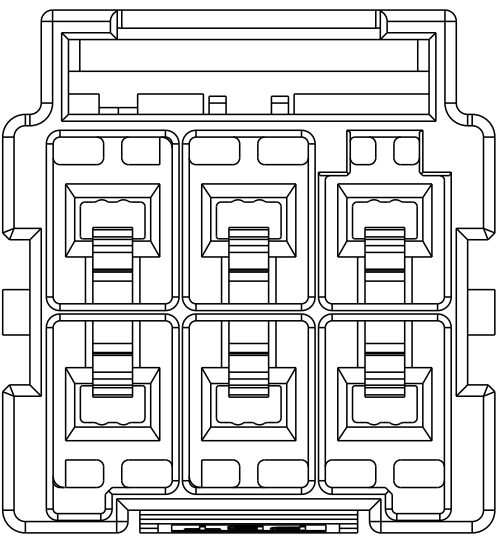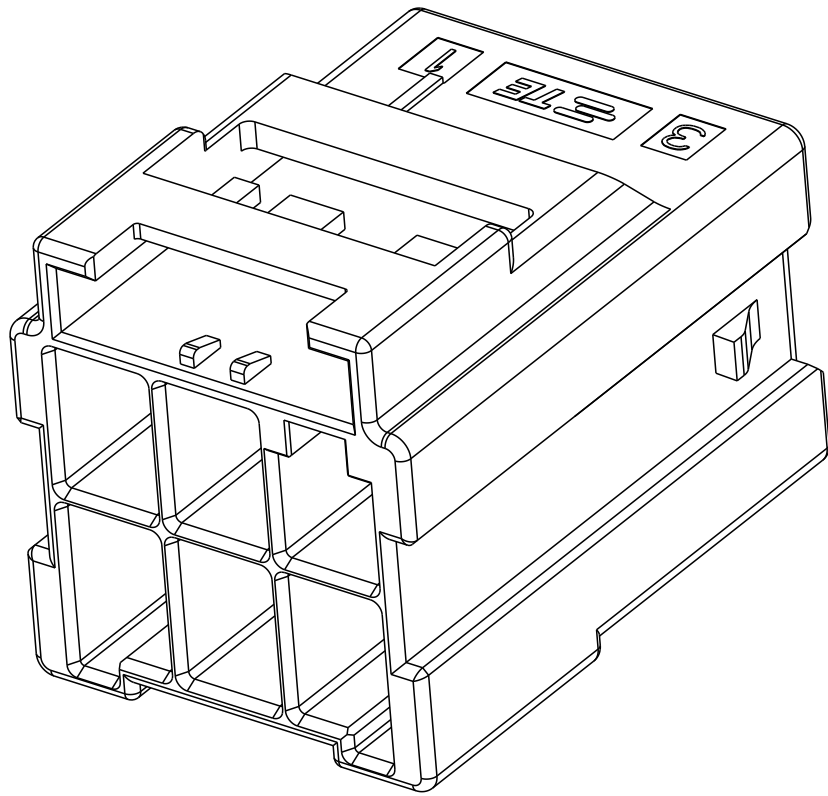


2*3 POSITIONS

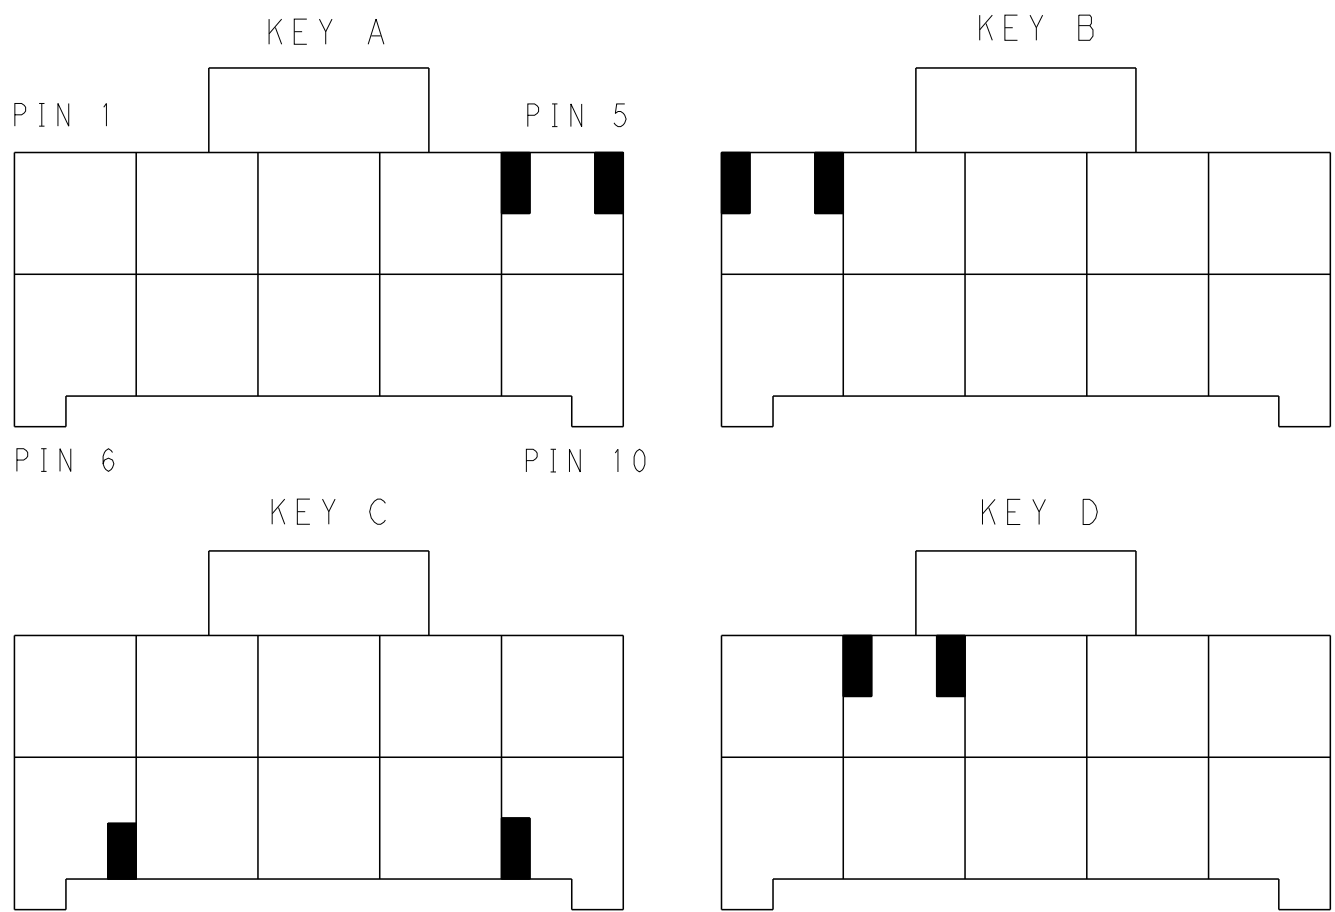



KEYING FOR 2*5 POS.

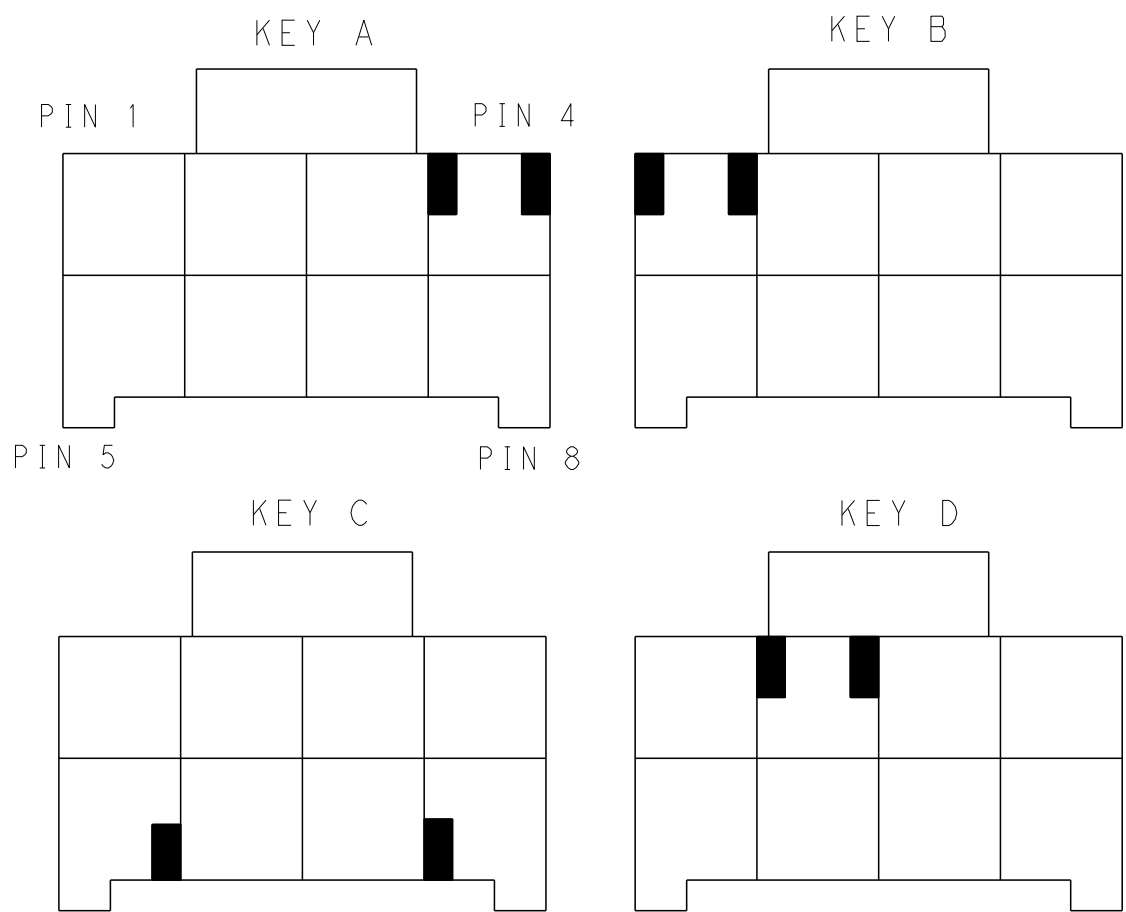


KEYING FOR 2*4 POS.

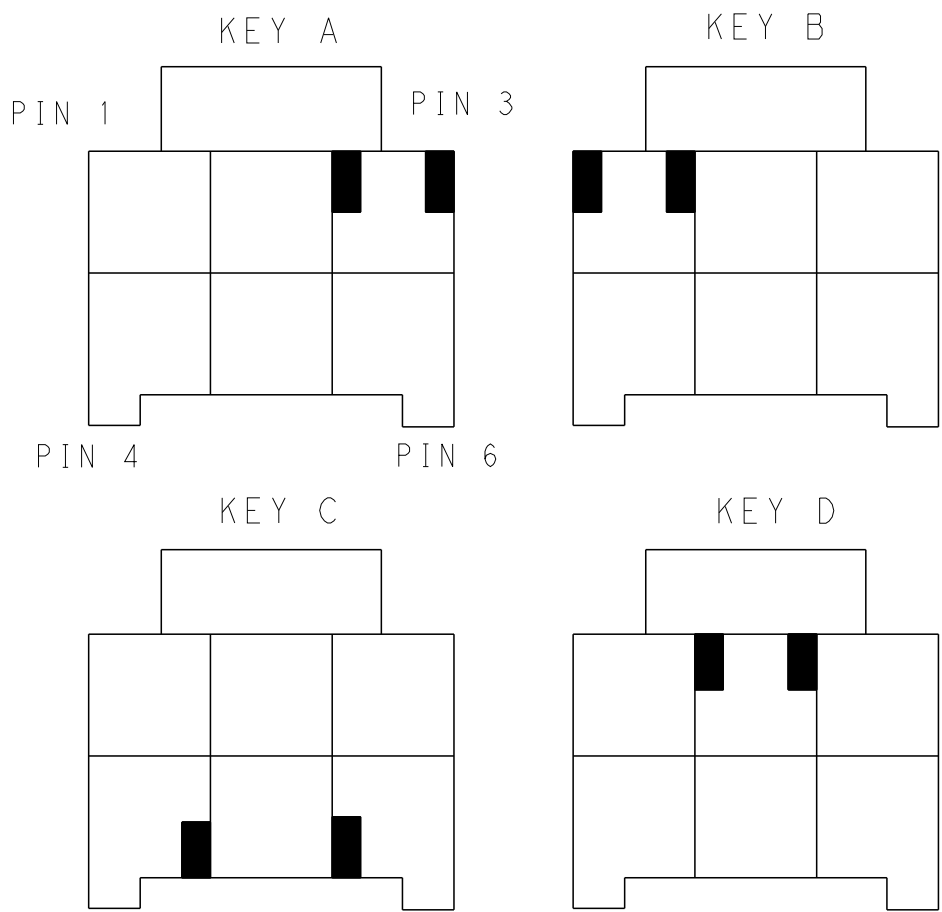

KEYING FOR 2*3 POS.

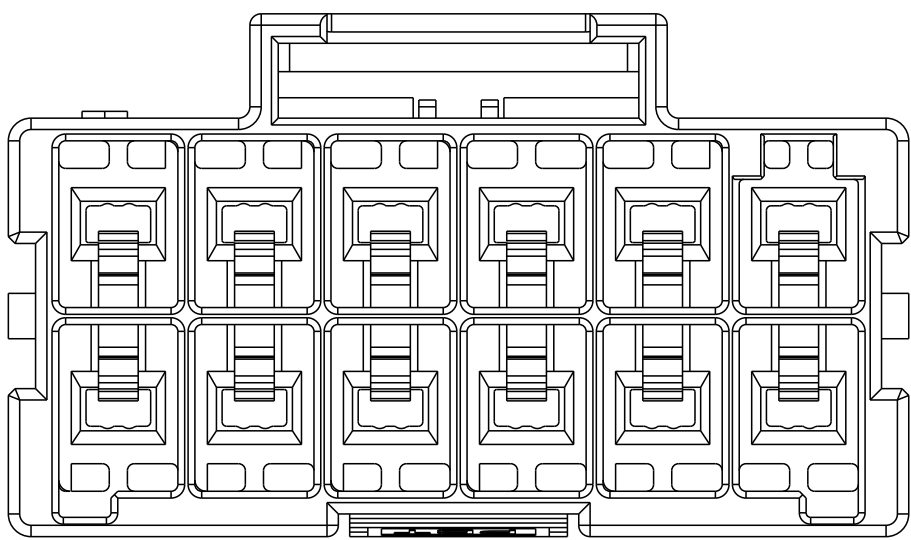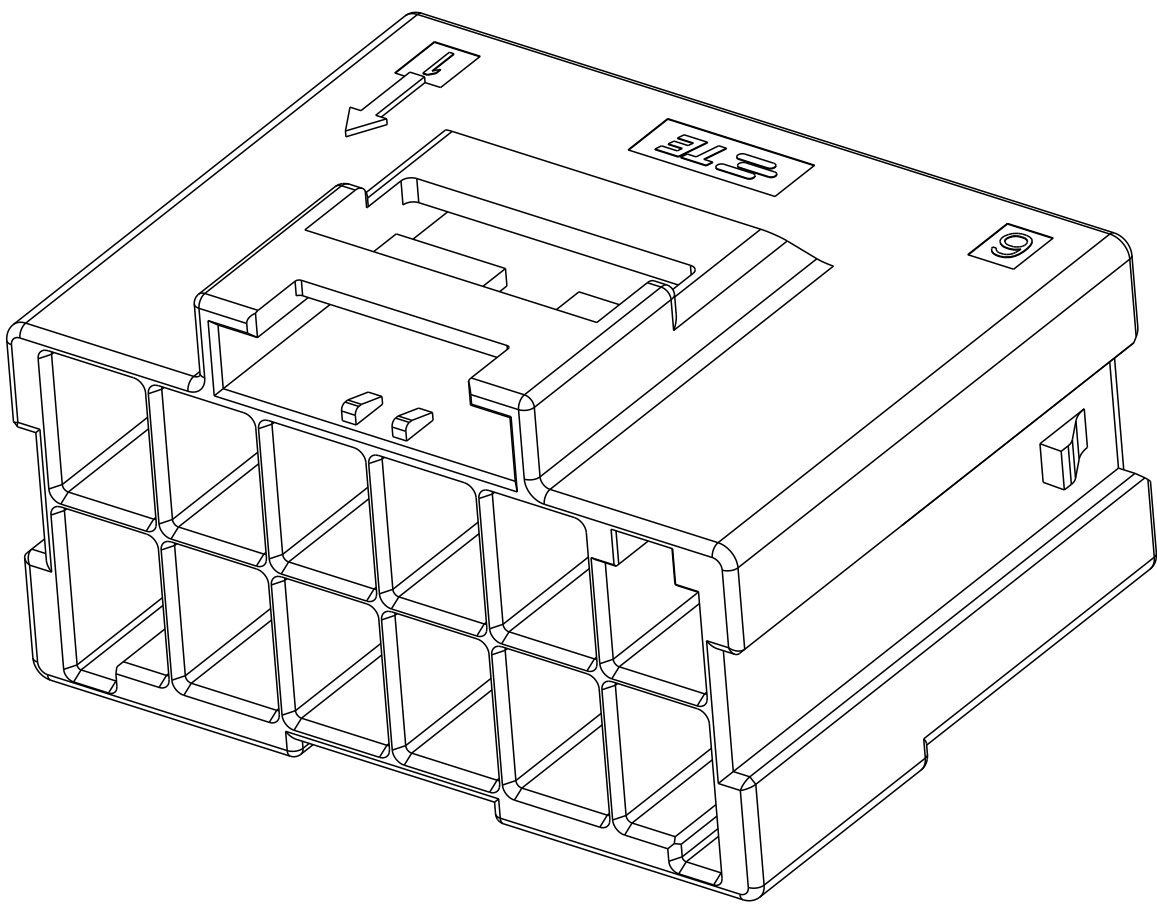

2*6 POSITIONS

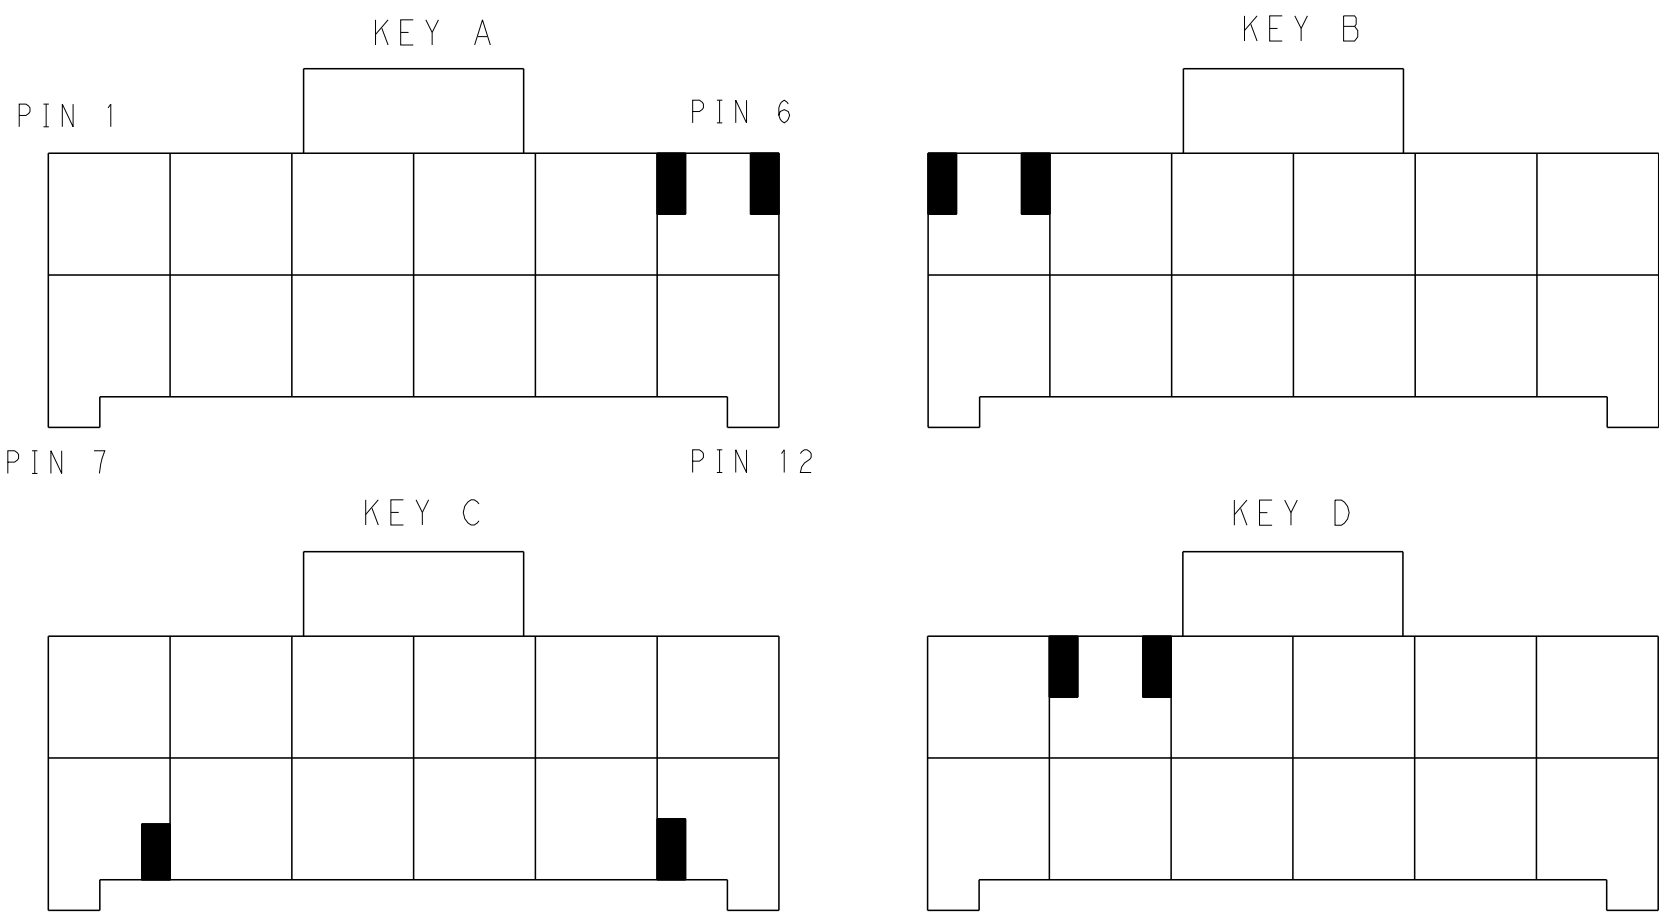

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971774-6
		KEY B	2-1971774-6
		KEY C	3-1971774-6
		KEY D	4-1971774-6
2*5	LEVEL 2	KEY A	5-1971774-6
		KEY B	6-1971774-6
		KEY C	7-1971774-6
		KEY D	8-1971774-6
2*5	LEVEL 1	KEY A	1-1971774-5
		KEY B	2-1971774-5
		KEY C	3-1971774-5
		KEY D	4-1971774-5
2*5	LEVEL 2	KEY A	5-1971774-5
		KEY B	6-1971774-5
		KEY C	7-1971774-5
		KEY D	8-1971774-5
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971774-4
		KEY B	2-1971774-4
		KEY C	3-1971774-4
		KEY D	4-1971774-4
2*4	LEVEL 2	KEY A	5-1971774-4
		KEY B	6-1971774-4
		KEY C	7-1971774-4
		KEY D	8-1971774-4
2*3	LEVEL 1	KEY A	1-1971774-3
		KEY B	2-1971774-3
		KEY C	3-1971774-3
		KEY D	4-1971774-3
2*3	LEVEL 2	KEY A	5-1971774-3
		KEY B	6-1971774-3
		KEY C	7-1971774-3
		KEY D	8-1971774-3
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	TOMMY_WU	09JUL2012	 TE Connectivity			
				CHK	HAPYE_WU	09JUL2012				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	YUZHONG_MAO	09JUL2012	NAME CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK			
mm		0 PLC ±.0		PRODUCT SPEC		108-106118				
		1 PLC ±0.35		APPLICATION SPEC		SIZE				
		2 PLC ±0.25		114-106118		CAGE CODE				
		3 PLC ±.0		WEIGHT		DRAWING NO				
		4 PLC ±.0		Customer Drawing		RESTRICTED TO				
ANGLES		±.0				A100779C=1971774				
FINISH		-				SCALE				
MATERIAL		-				SHEET 2 OF 2				
						REV C				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1971774-3](#)