

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0940304200

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

Quick Disconnect, Female for (0.25-0.50mm²) 20-24 AWG Wire, Accepts 2.80 x 0.50mm Tab, Unplated

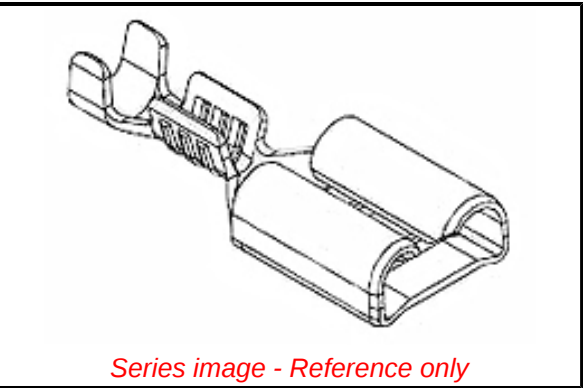

Series image - Reference only

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Quick Disconnects
Series	94030
Crimp Quality Equipment	Yes
Insulated	No
Overview	Standard Quick-Disconnect Terminals
Product Name	N/A
Type	Quick Disconnect
UPC	800753536531
Physical	
Barrel Type	Open
Gender	Female
Glow-Wire Capable	No
Insulation	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Unplated
Net Weight	0.250/g
Orientation	Straight
Packaging Type	Reel
Polarized to Mating Part	Yes
Tab Thickness	0.81mm
Tab Width	2.79mm
Temperature Range - Operating	80°C
Wire Insulation Diameter	0.60-2.00mm
Wire Size AWG	20, 22, 24
Wire Size mm²	0.25-0.50
Electrical	
Voltage - Maximum	250V
Material Info	
Reference - Drawing Numbers	
Sales Drawing	SD-94030-420X-M

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -ED/88/2018 (15 January 2019)

Halogen-Free

Status

Not Relevant

For more information, please visit

Contact US

China ROHS

ELV

RoHS Phthalates

Not Relevant

Compliant

Not Contained

Search Parts in this Series

94030 Series

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Mini-Mac Applicator Rear Feed	638064000
Mini-Mac Applicator Rear Feed	638064100
Hand Crimp Tool For Quick Disconnect, Female Terminals	638257800

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

94030-4200