

NUMBER C-177902

三角度 (3-View) ANGLE PROJECTION

METRIC

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

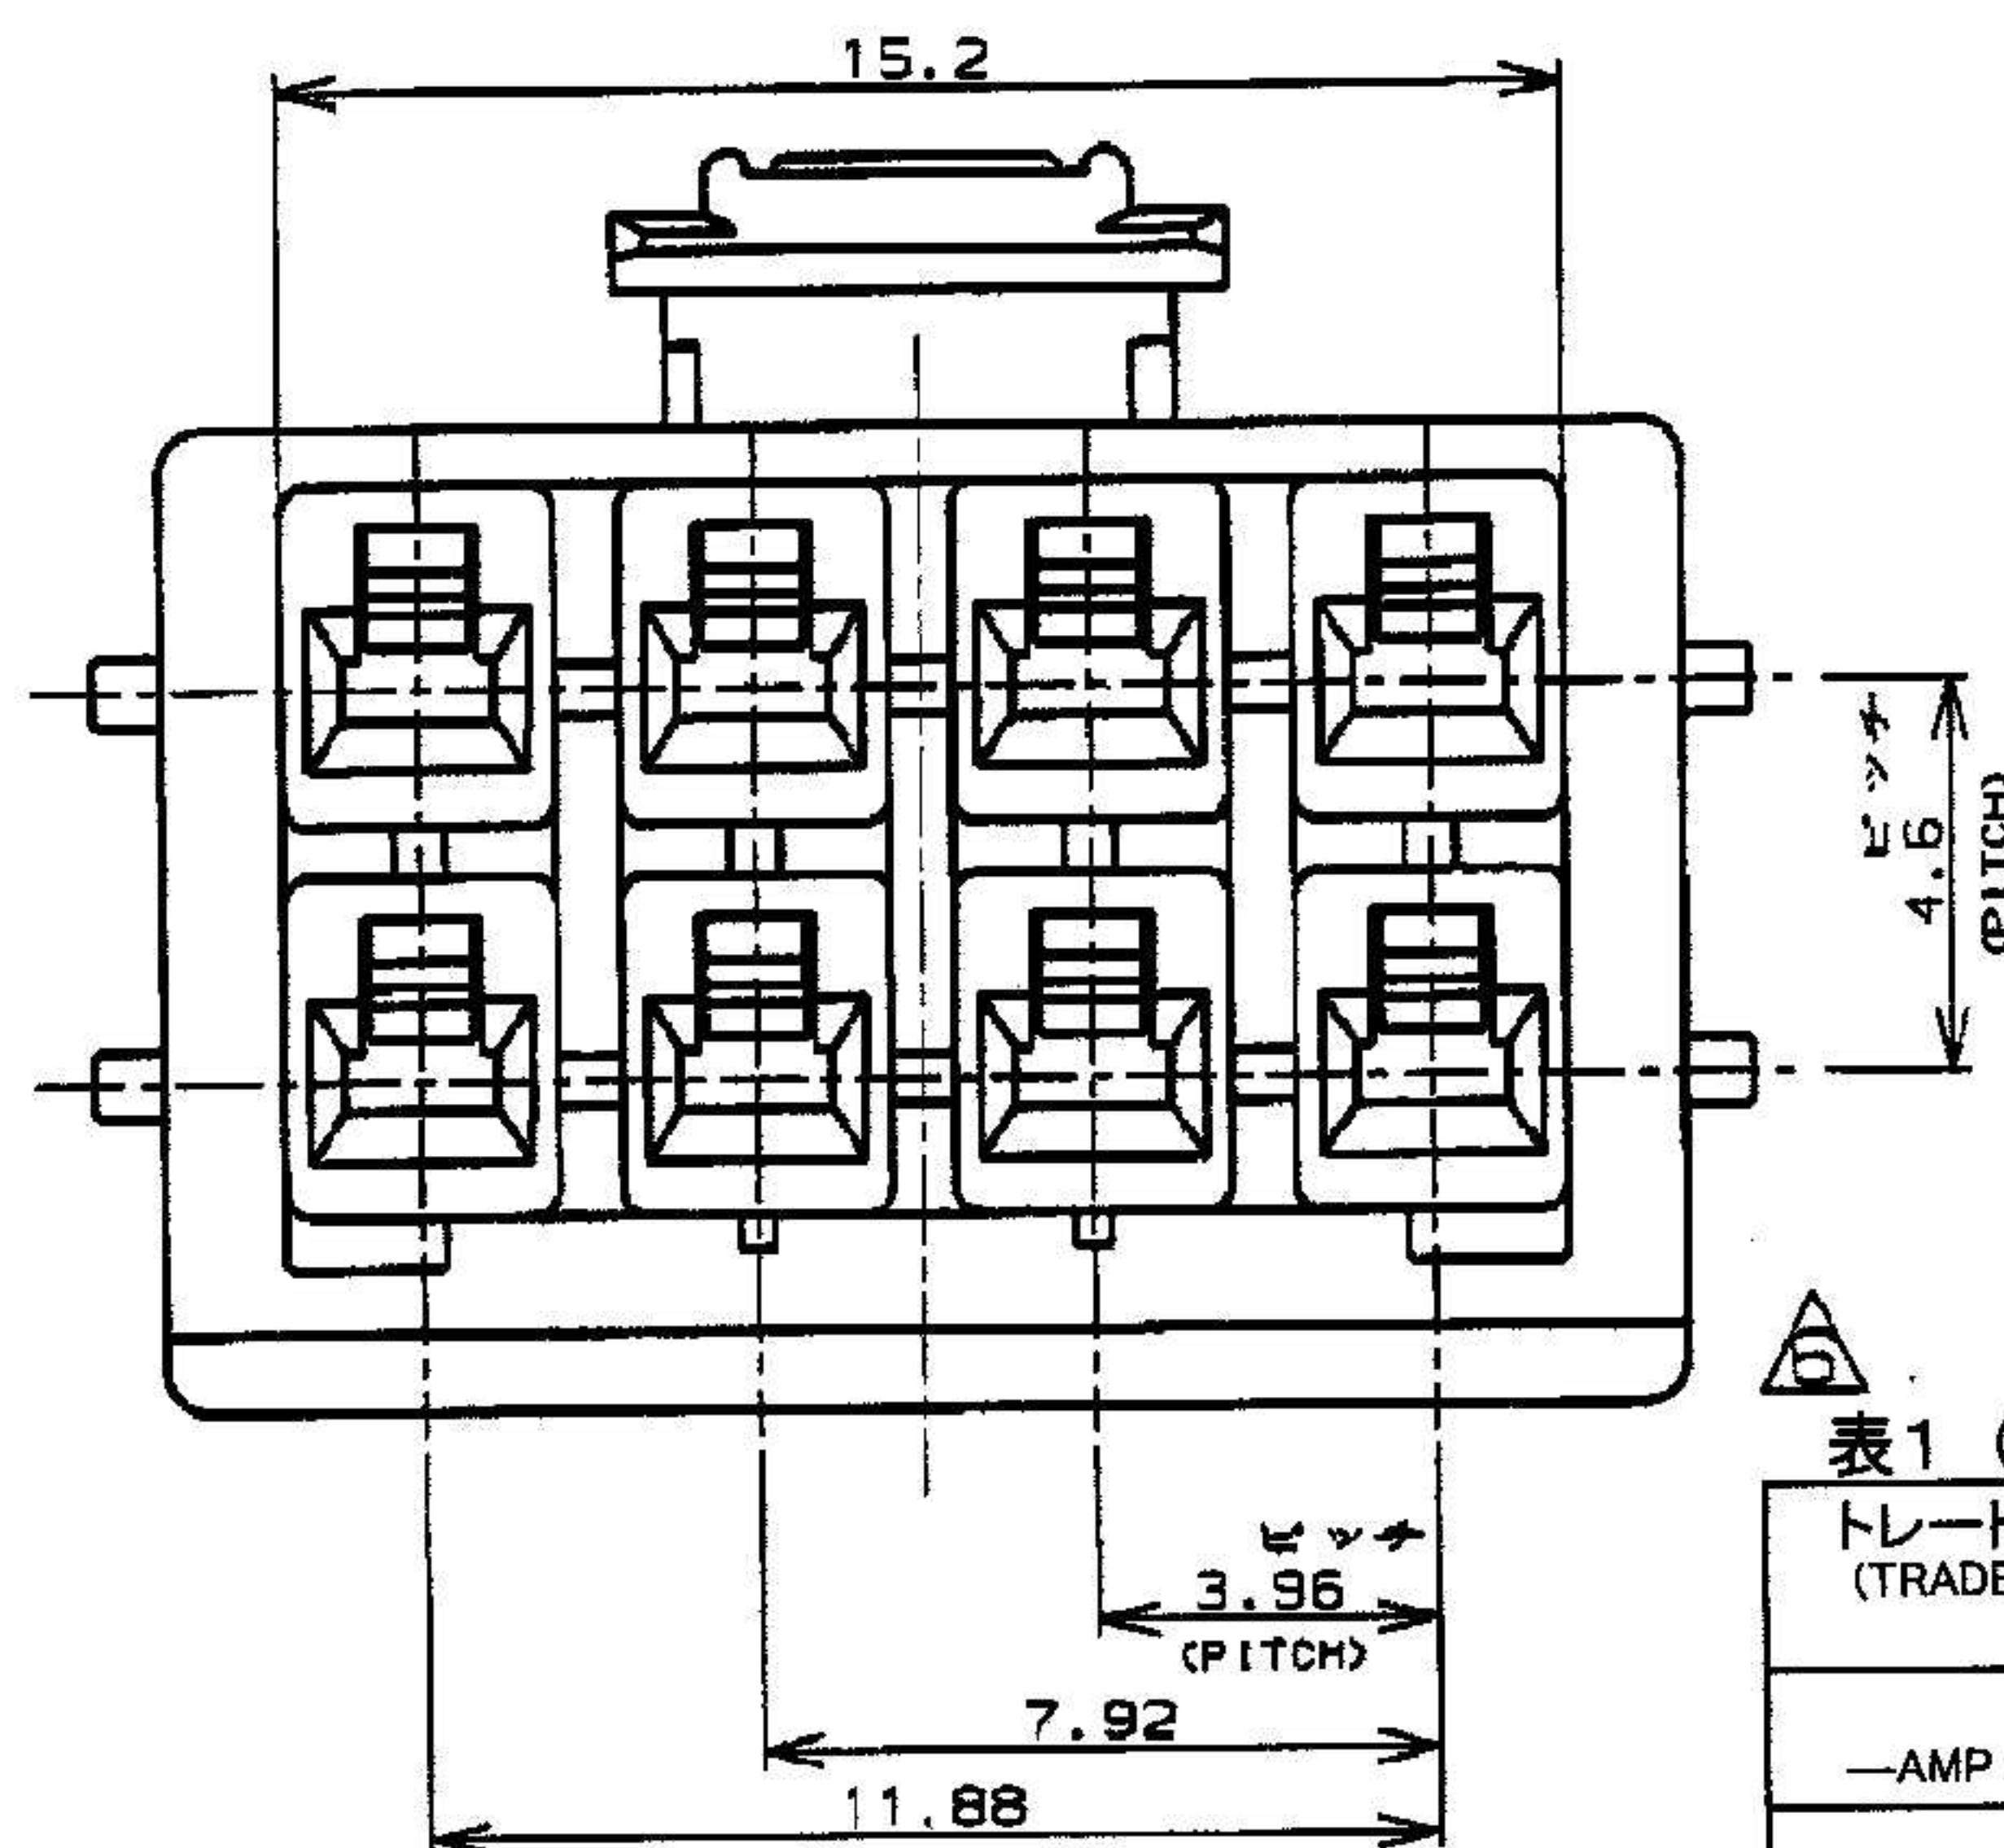
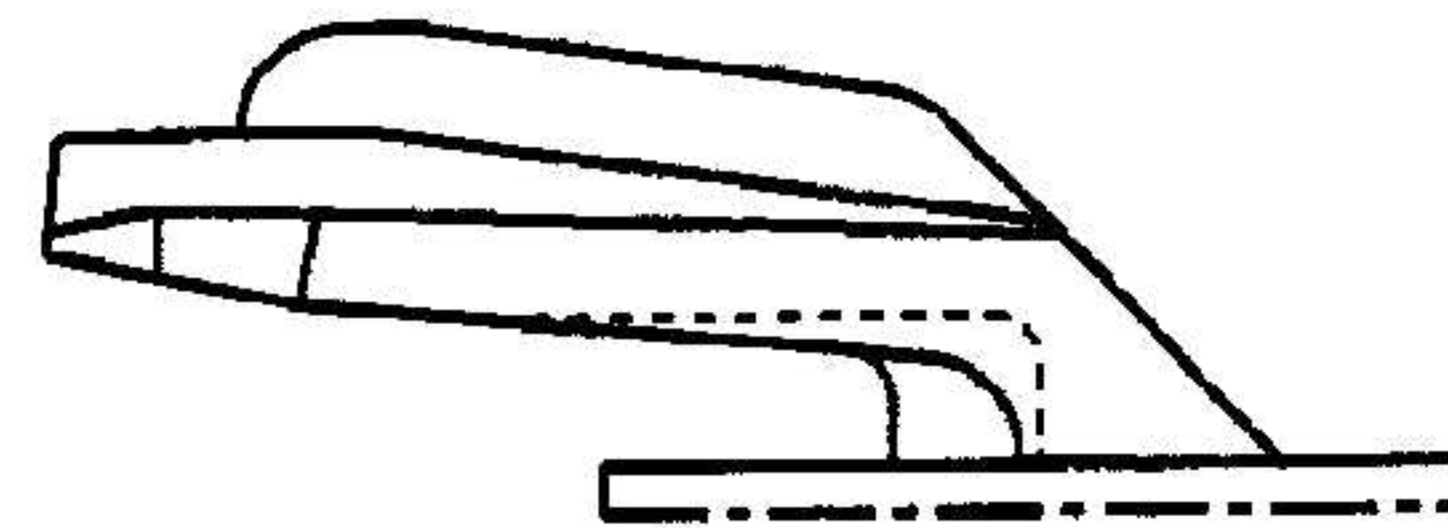
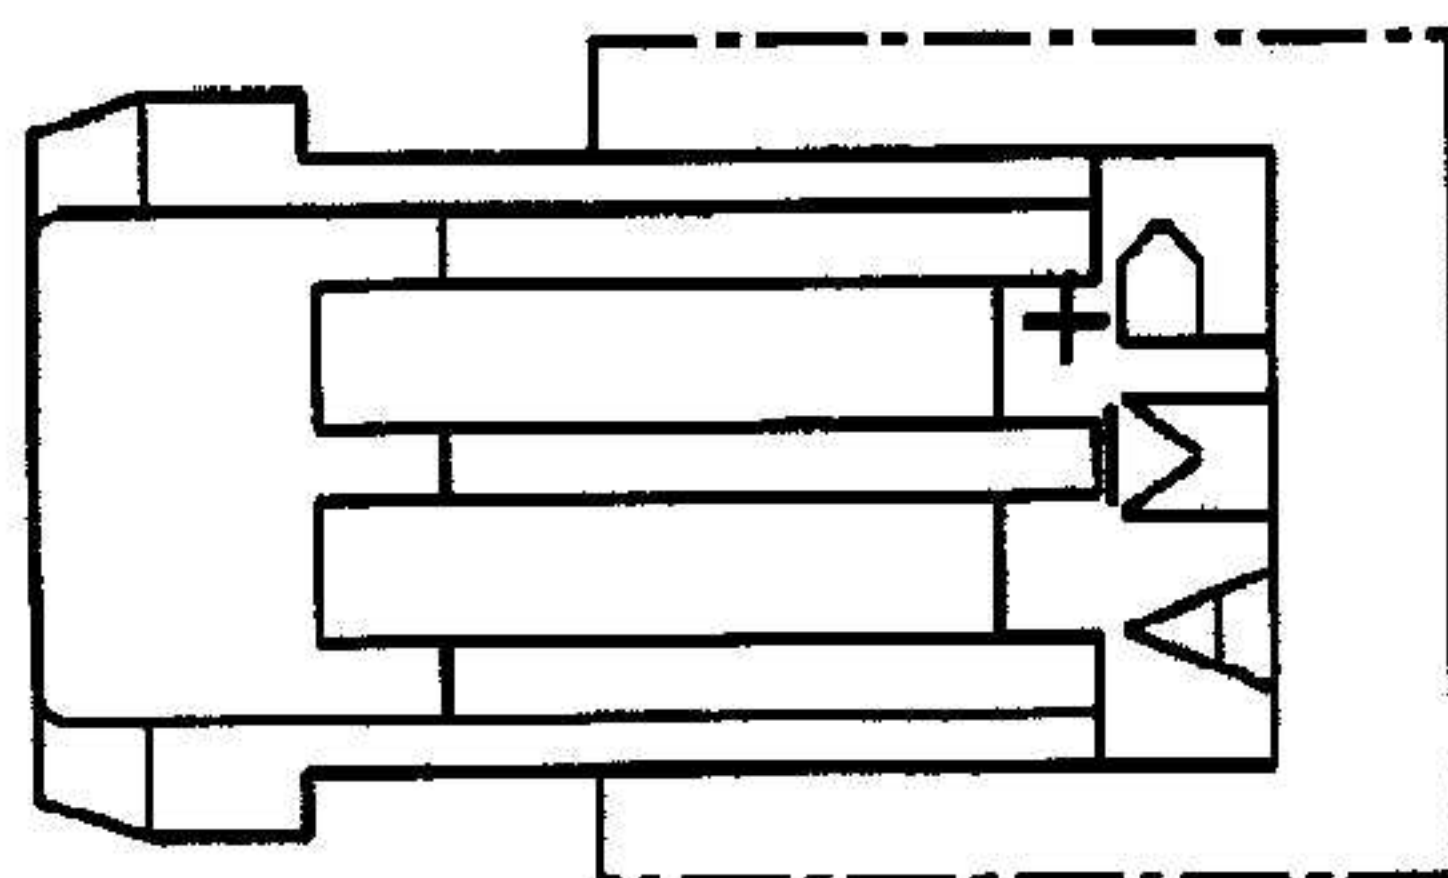
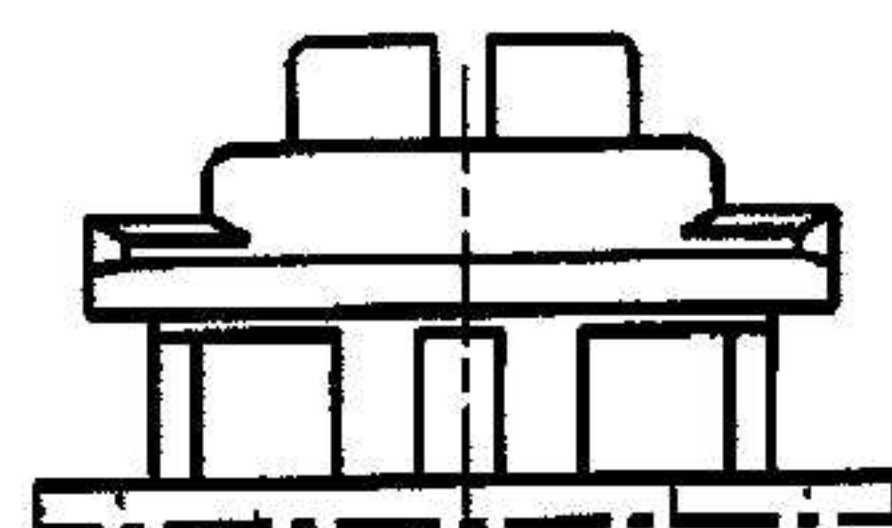
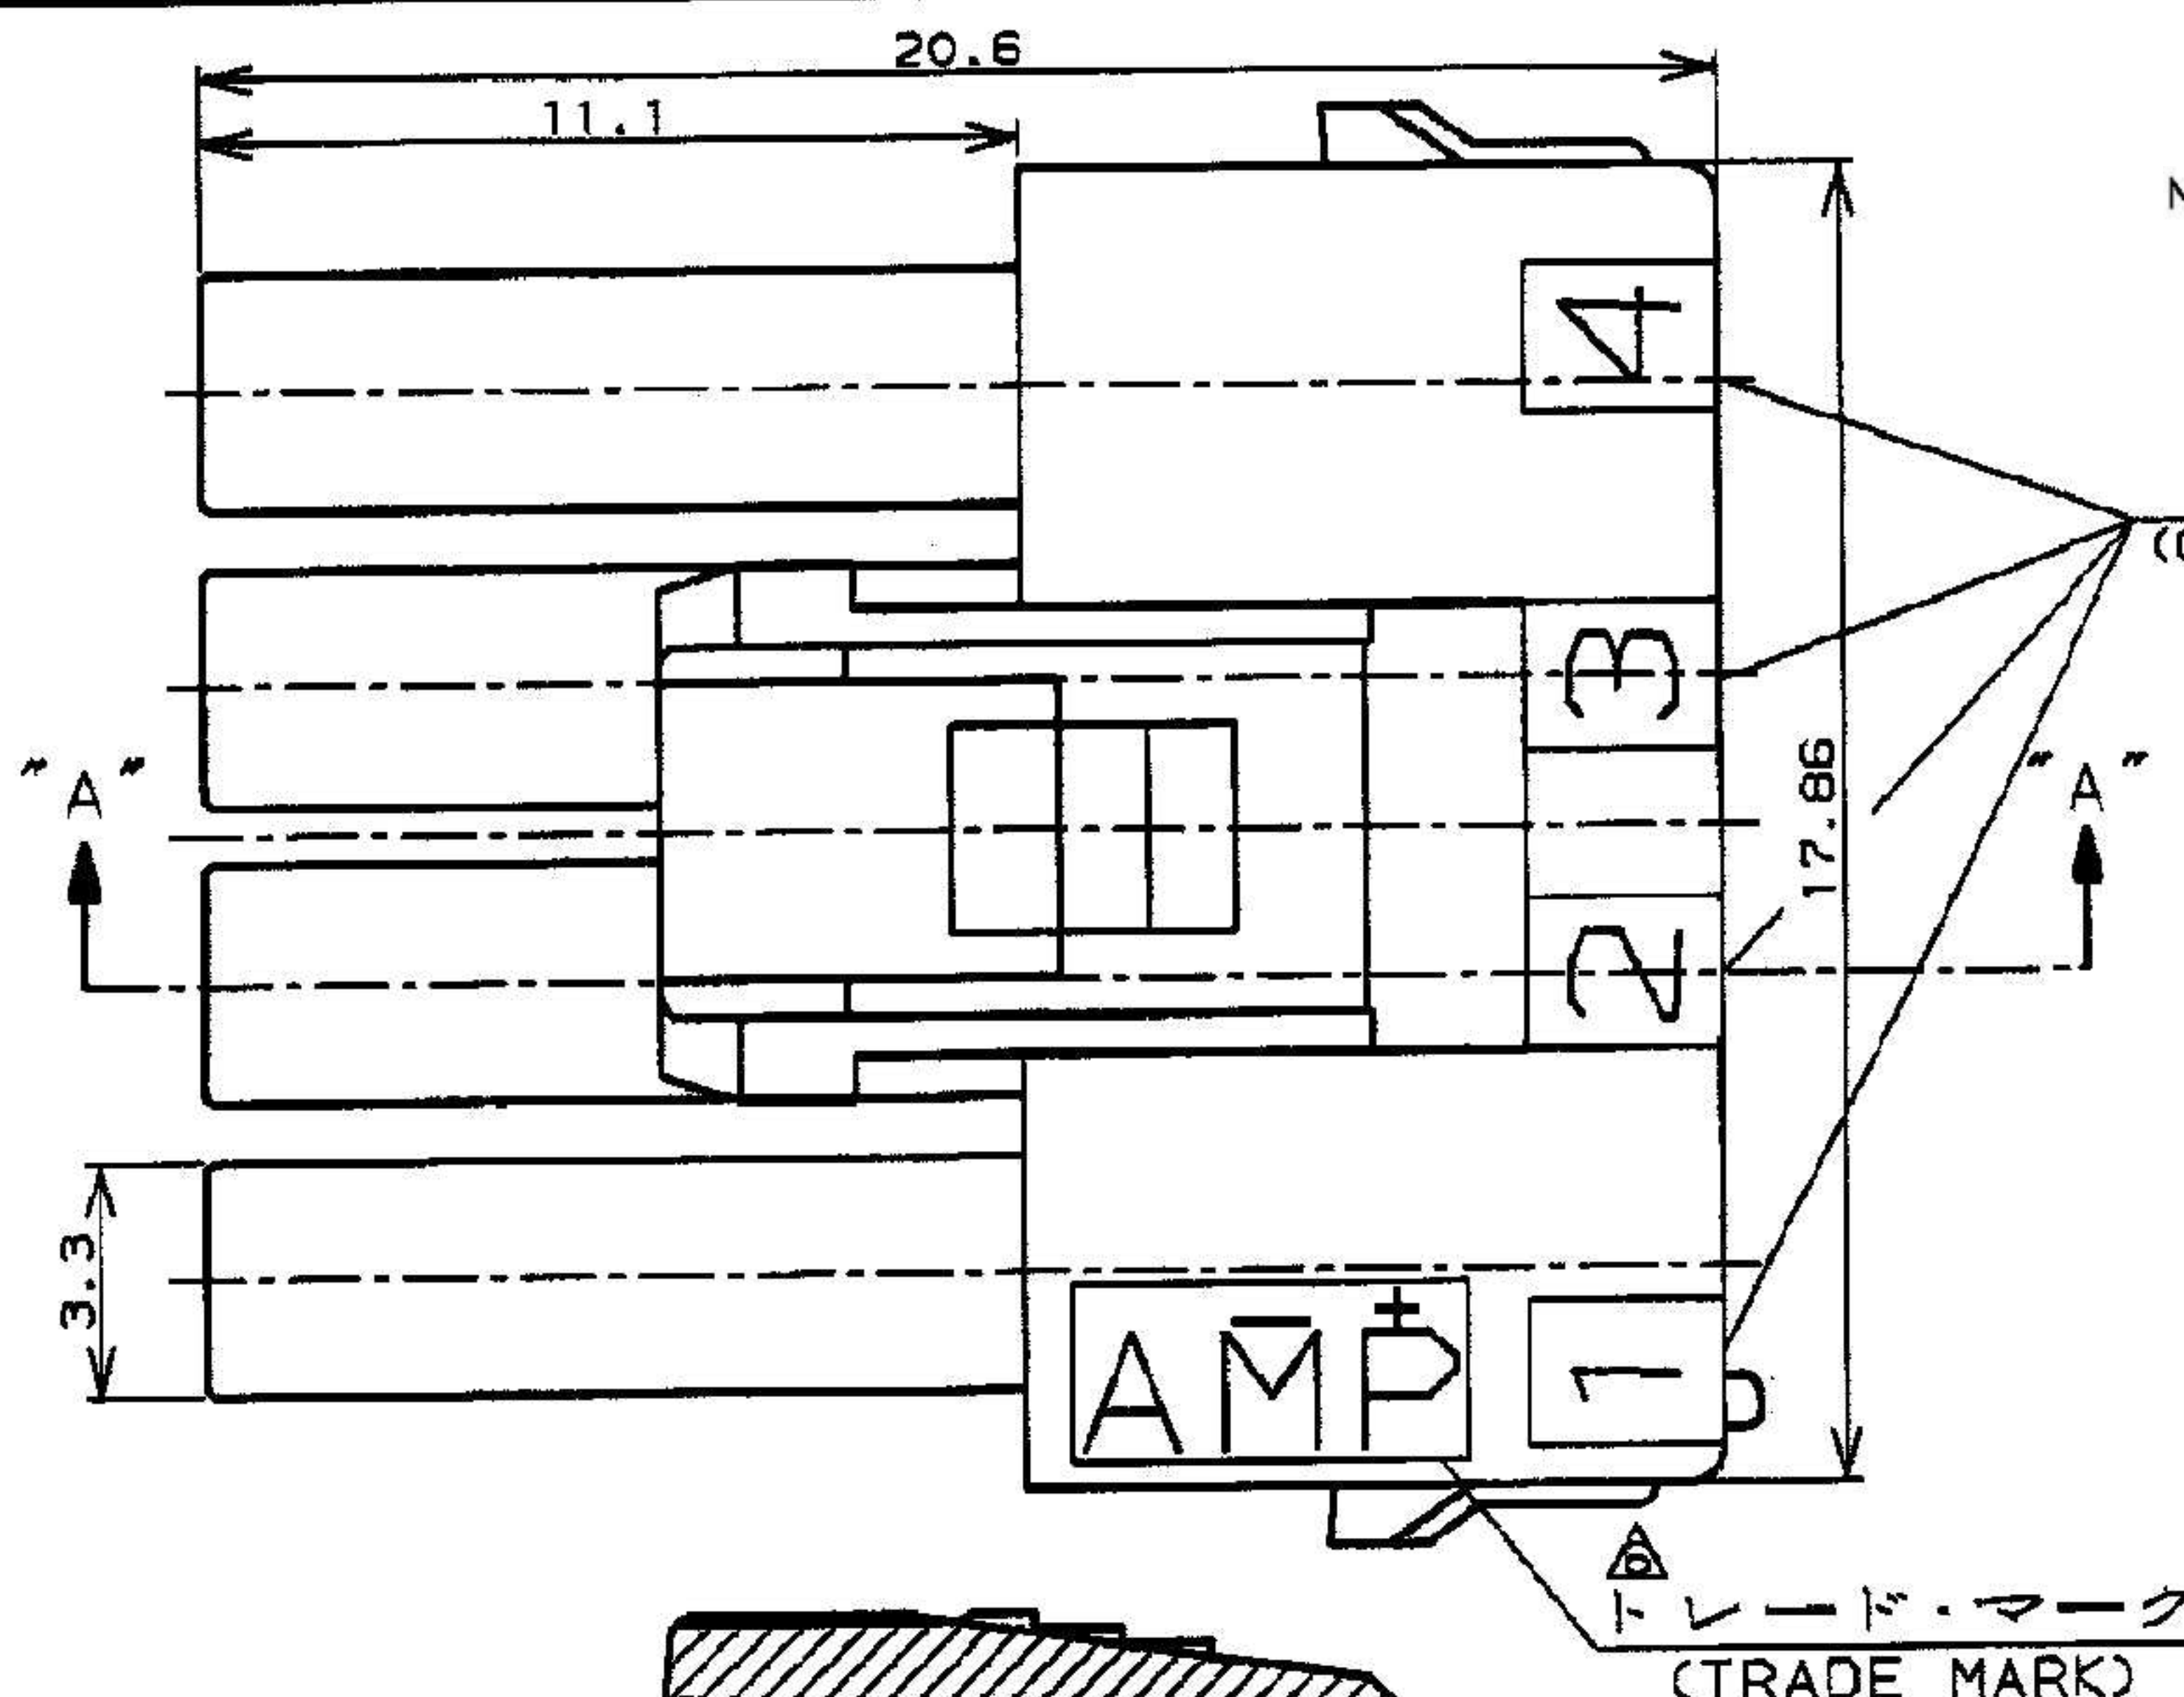
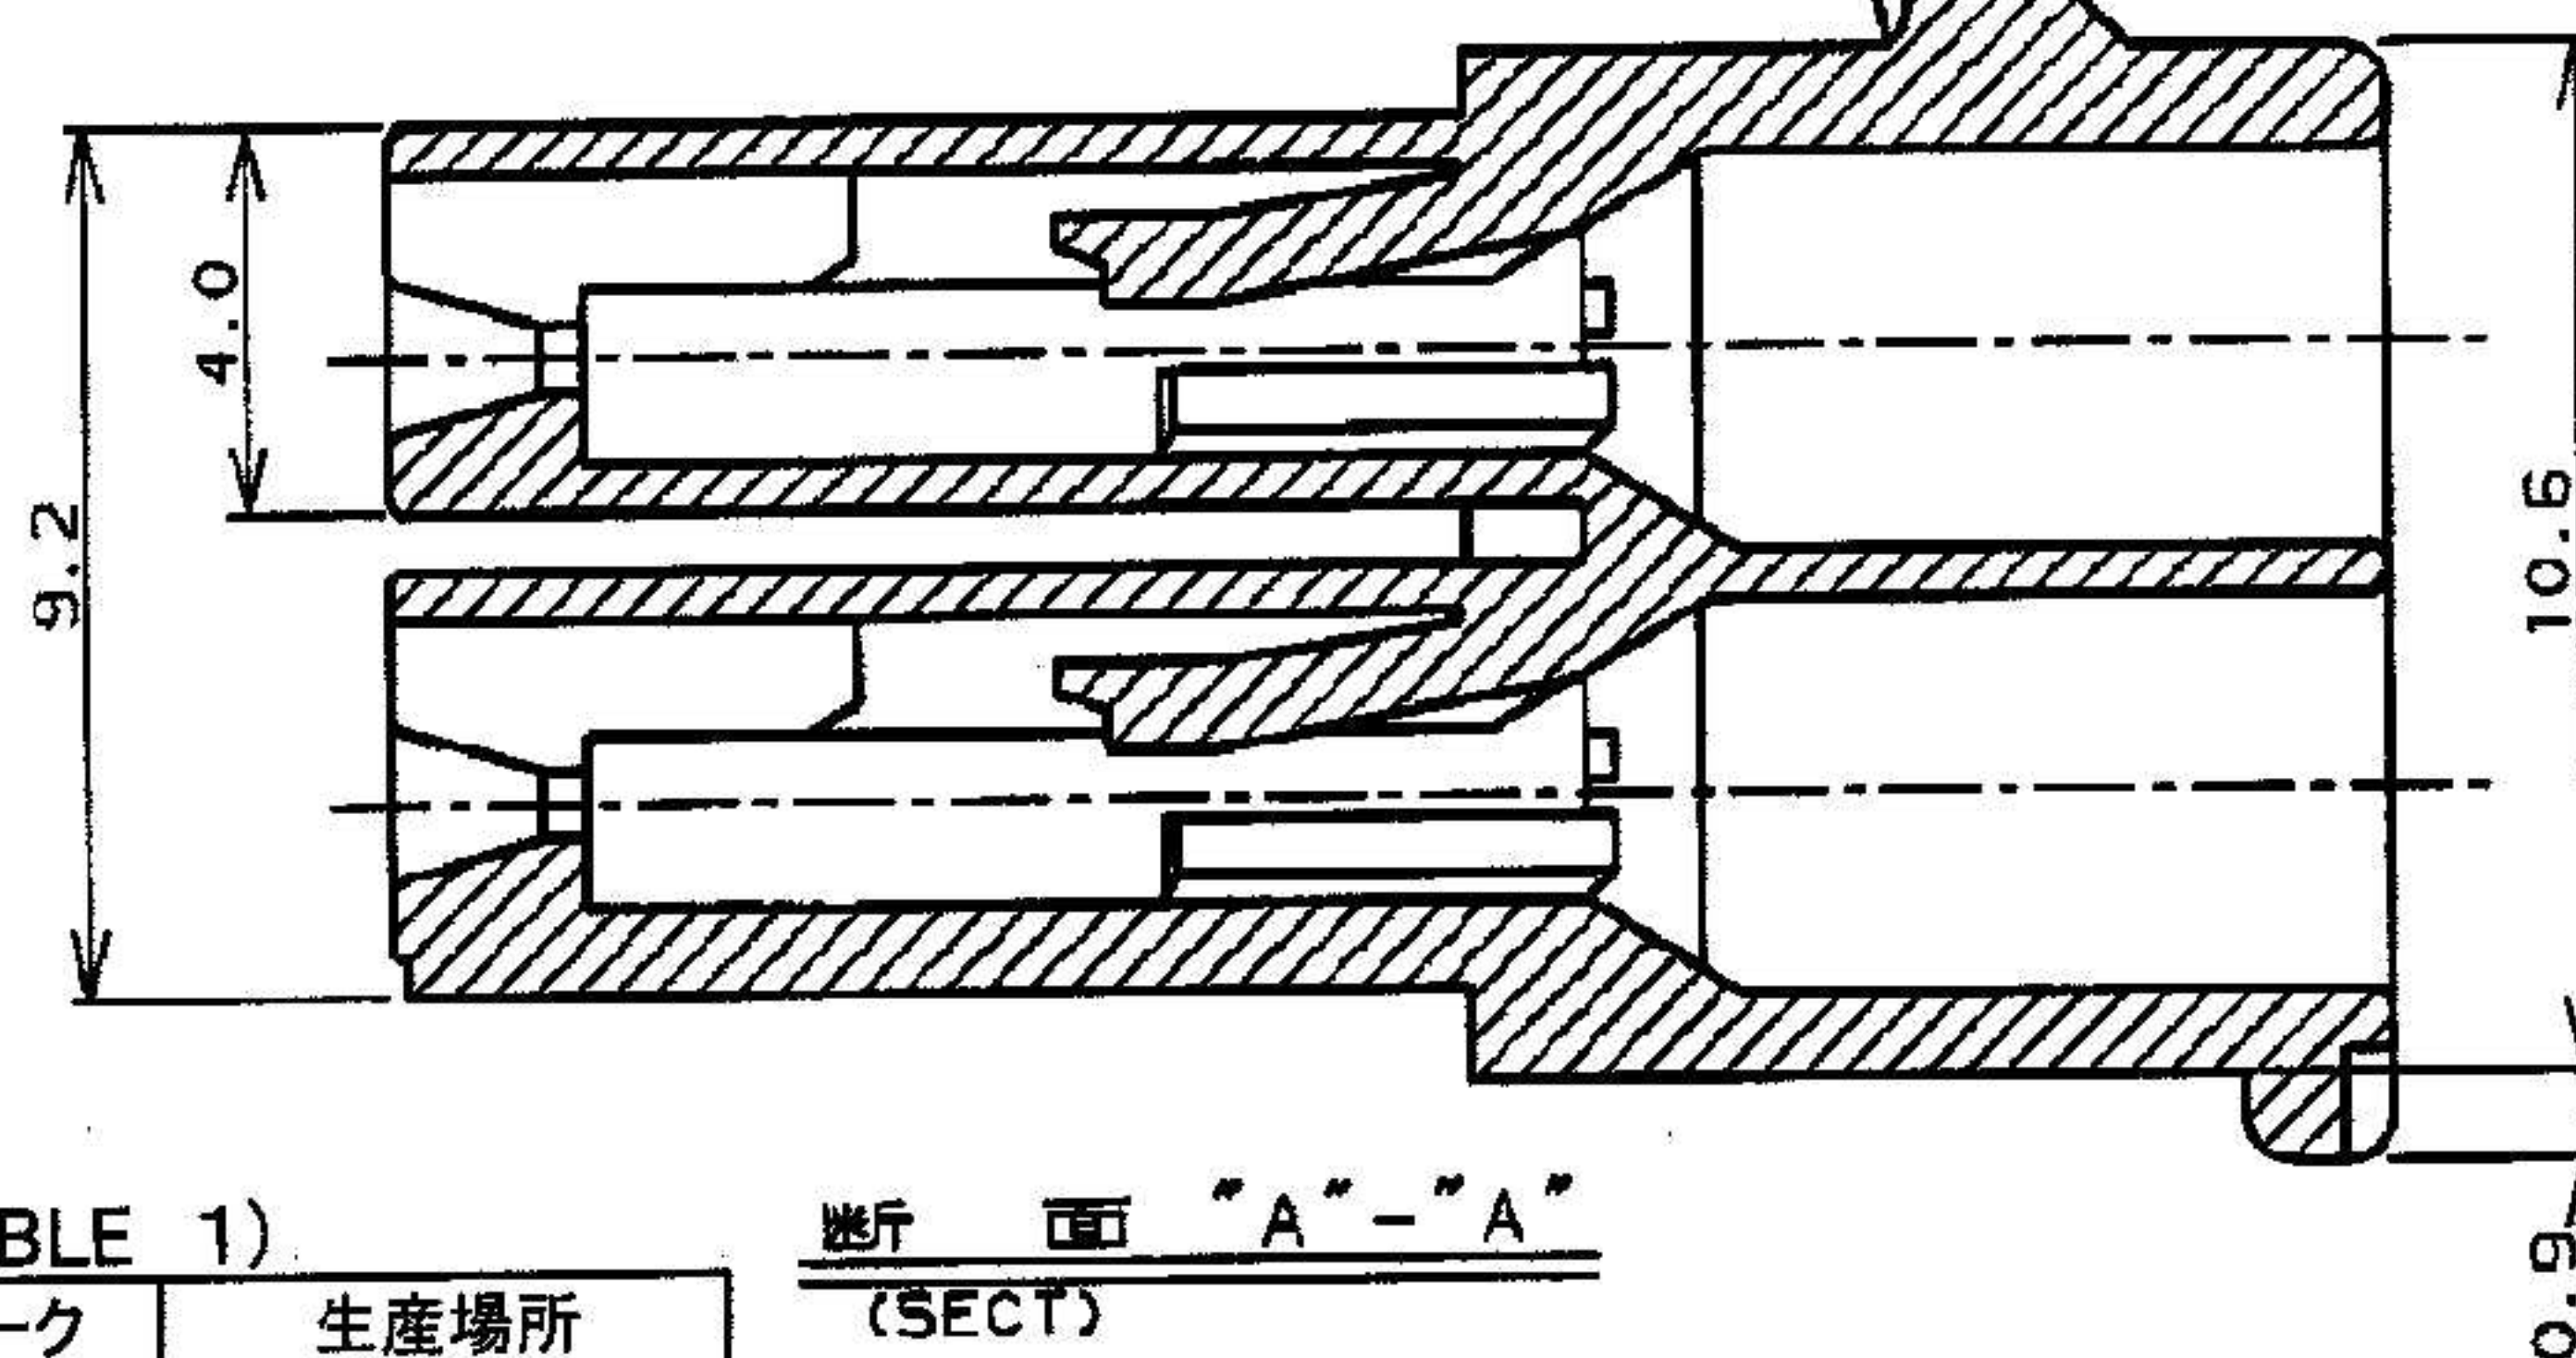
ロックタイプII
LOCK TYPE II


表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
—AMP OR AMP	日本 (JAPAN)
—+AMP OR AMP	中国 (CHINA(PRC))
•AMP OR AMP	韓国 (KOREA)

断面 "A" - "A"
(SECT)本図ロックタイプIを示す
AS SHOWN LOCK TYPE I

NOTES:

- PRODUCT SPEC., 108-5410
- APPLICABLE CONTACT P/N
REC CONTACT: 177915-□ (*20-16AWG)
177914-□ (*26-22AWG)
- MATING CONN. P/N
CAP HSG: 179467-□ (FREE HANGING)
TAB CONTACT: 177917-□ (*20-16AWG)
177916-□ (*26-22AWG)
- APPLICABLE PLATE P/N: 177920-□
- INSTRUCTION SHEET: 411-5638
- SEE TABLE 1
- ALL PARTS MEET RTI ELECTRICAL RATING OF 105C ACCORDING TO UL 1977
- PART 5-177902-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT)
- PART 177902-7 COMPLY WITH HOT WIRE REQUIREMENT, PA66, UL 94V-0, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH THE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSING THAT ALSO COMPLY.
- Preliminary-not for production

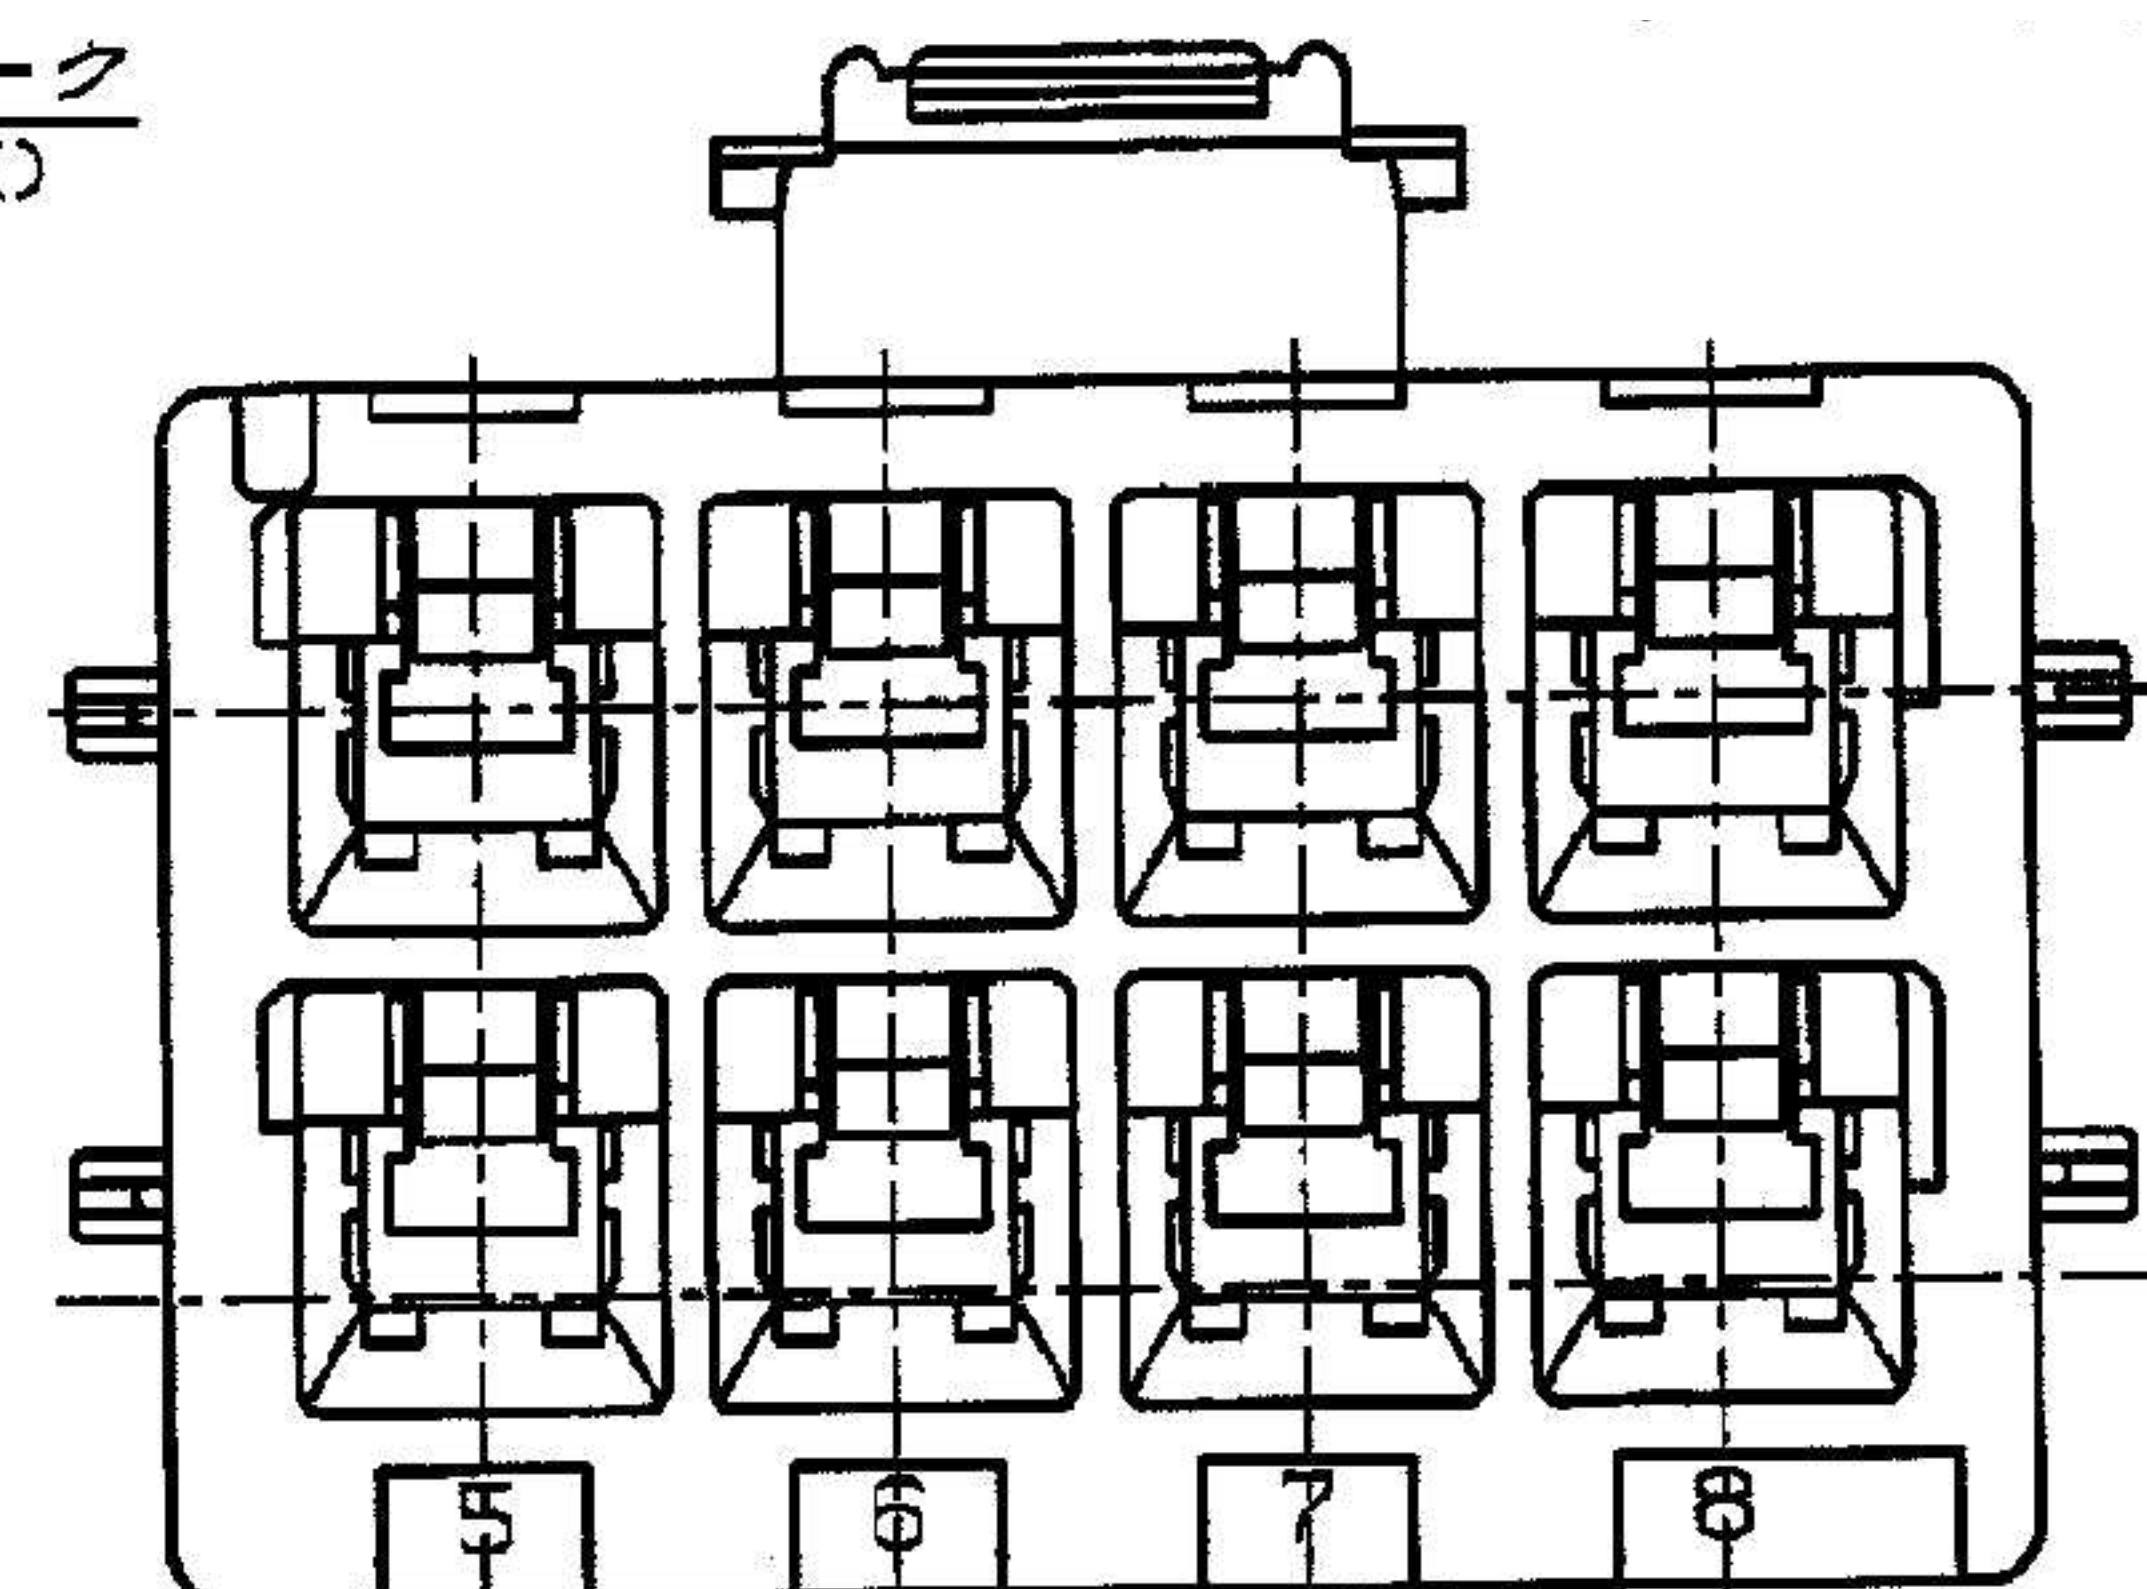回路番号
(CIRCUIT No.)

注: 1. 適用製品規格: 108-5410

2. 適用コンタクト型番

リセ・コンタクト: 177915-□ (*20-16AWG)
177914-□ (*26-22AWG)

3. 嵌合相手側製品型番

キャップ・ハウジング: 179467-□ (首吊りタイプ)
タブ・コンタクト: 177917-□ (*20-16AWG)
177916-□ (*26-22AWG)

4. 適用プレート型番: 177920-□

5. 取扱説明書: 411-5638

△ 表1参照

LOCK TYPE I	自然色 (NATURAL)	色	5-177902-1
ロックタイプ	ハウジング色調	極数	型番
LOCK TYPE	(HOUSING COLOR) (Pos.)		(P/N)

ロックタイプII	自然色 (NATURAL)	色	177902-7
ロックタイプII	自然色 (NATURAL)	色	3-177902-1
ロックタイプI	青 (BLUE)	色	-5
ロックタイプI	黄 (YELLOW)	色	-4
ロックタイプI	自然色 (NATURAL)	色	177902-1
ロックタイプ	ハウジング色調	極数	型番
LOCK TYPE	(HOUSING COLOR) (Pos.)		(P/N)

C4	REVISED ECR-14-017020	W.W	D.Z	14NOV 2014
C3	REVISED ECR-14-013449	W.W	D.Z	14SEP 2014
C2	REVISED ECR-13-019881	A.Z	D.Z	23DEC 2013
C1	REVISED ECR-12-019929	A.Z	F.M	NOV16 2012
C	変更 FJ00-1369-01	out	11/13/07	
B	変更 FJ00-0242-00	11/13/07		
A	変更 FJ00-0953-98	T.Y	M.S	28.MAY '98
O	作成 FJ00-1011-94	N.N	Y.K	5.AUG '94
LTR	変更 (REVISION RECORD)	DR	CHK	DATE

適合電線範囲 (WIRE RANGE)	線径 (mm)	線径 (mm)
mm (AWG)	mm	mm
材料 (MATERIAL)	仕上 (FINISH)	
8/8 ナイロン (UL94V-0)	8/8 NYLON (UL94V-0)	
DR. 20.JUL '94	DE. 20.JUL '94	
N.NAGASHIMA	M.SHINDO	
CHK. 5.AUG '94	APP. 5.AUG '94	
M.SHINDO	Y.KASHIWA	

AMP Tyco Electronics AMP K.K.
Kawasaki, Japan

AMP POWER DOUBLE LOCK CONN.			
8極 3.96mmピッチ プラグハウジング (2列タイプ)			
AMP POWER DOUBLE LOCK CONN. 3.96mm PITCH PLUG HOUSING 8 Pos (DBL ROW)			
一般公差	SIZE	LOC	番号 (No.)
10以下: ±0.2 10以上 30以下: ±0.25 30以上 100以下: ±0.3 角: ±0.3	B	J	C-177902
尺度 (SCALE)	REV.	SHEET	
	C4	1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-177902-1](#)