


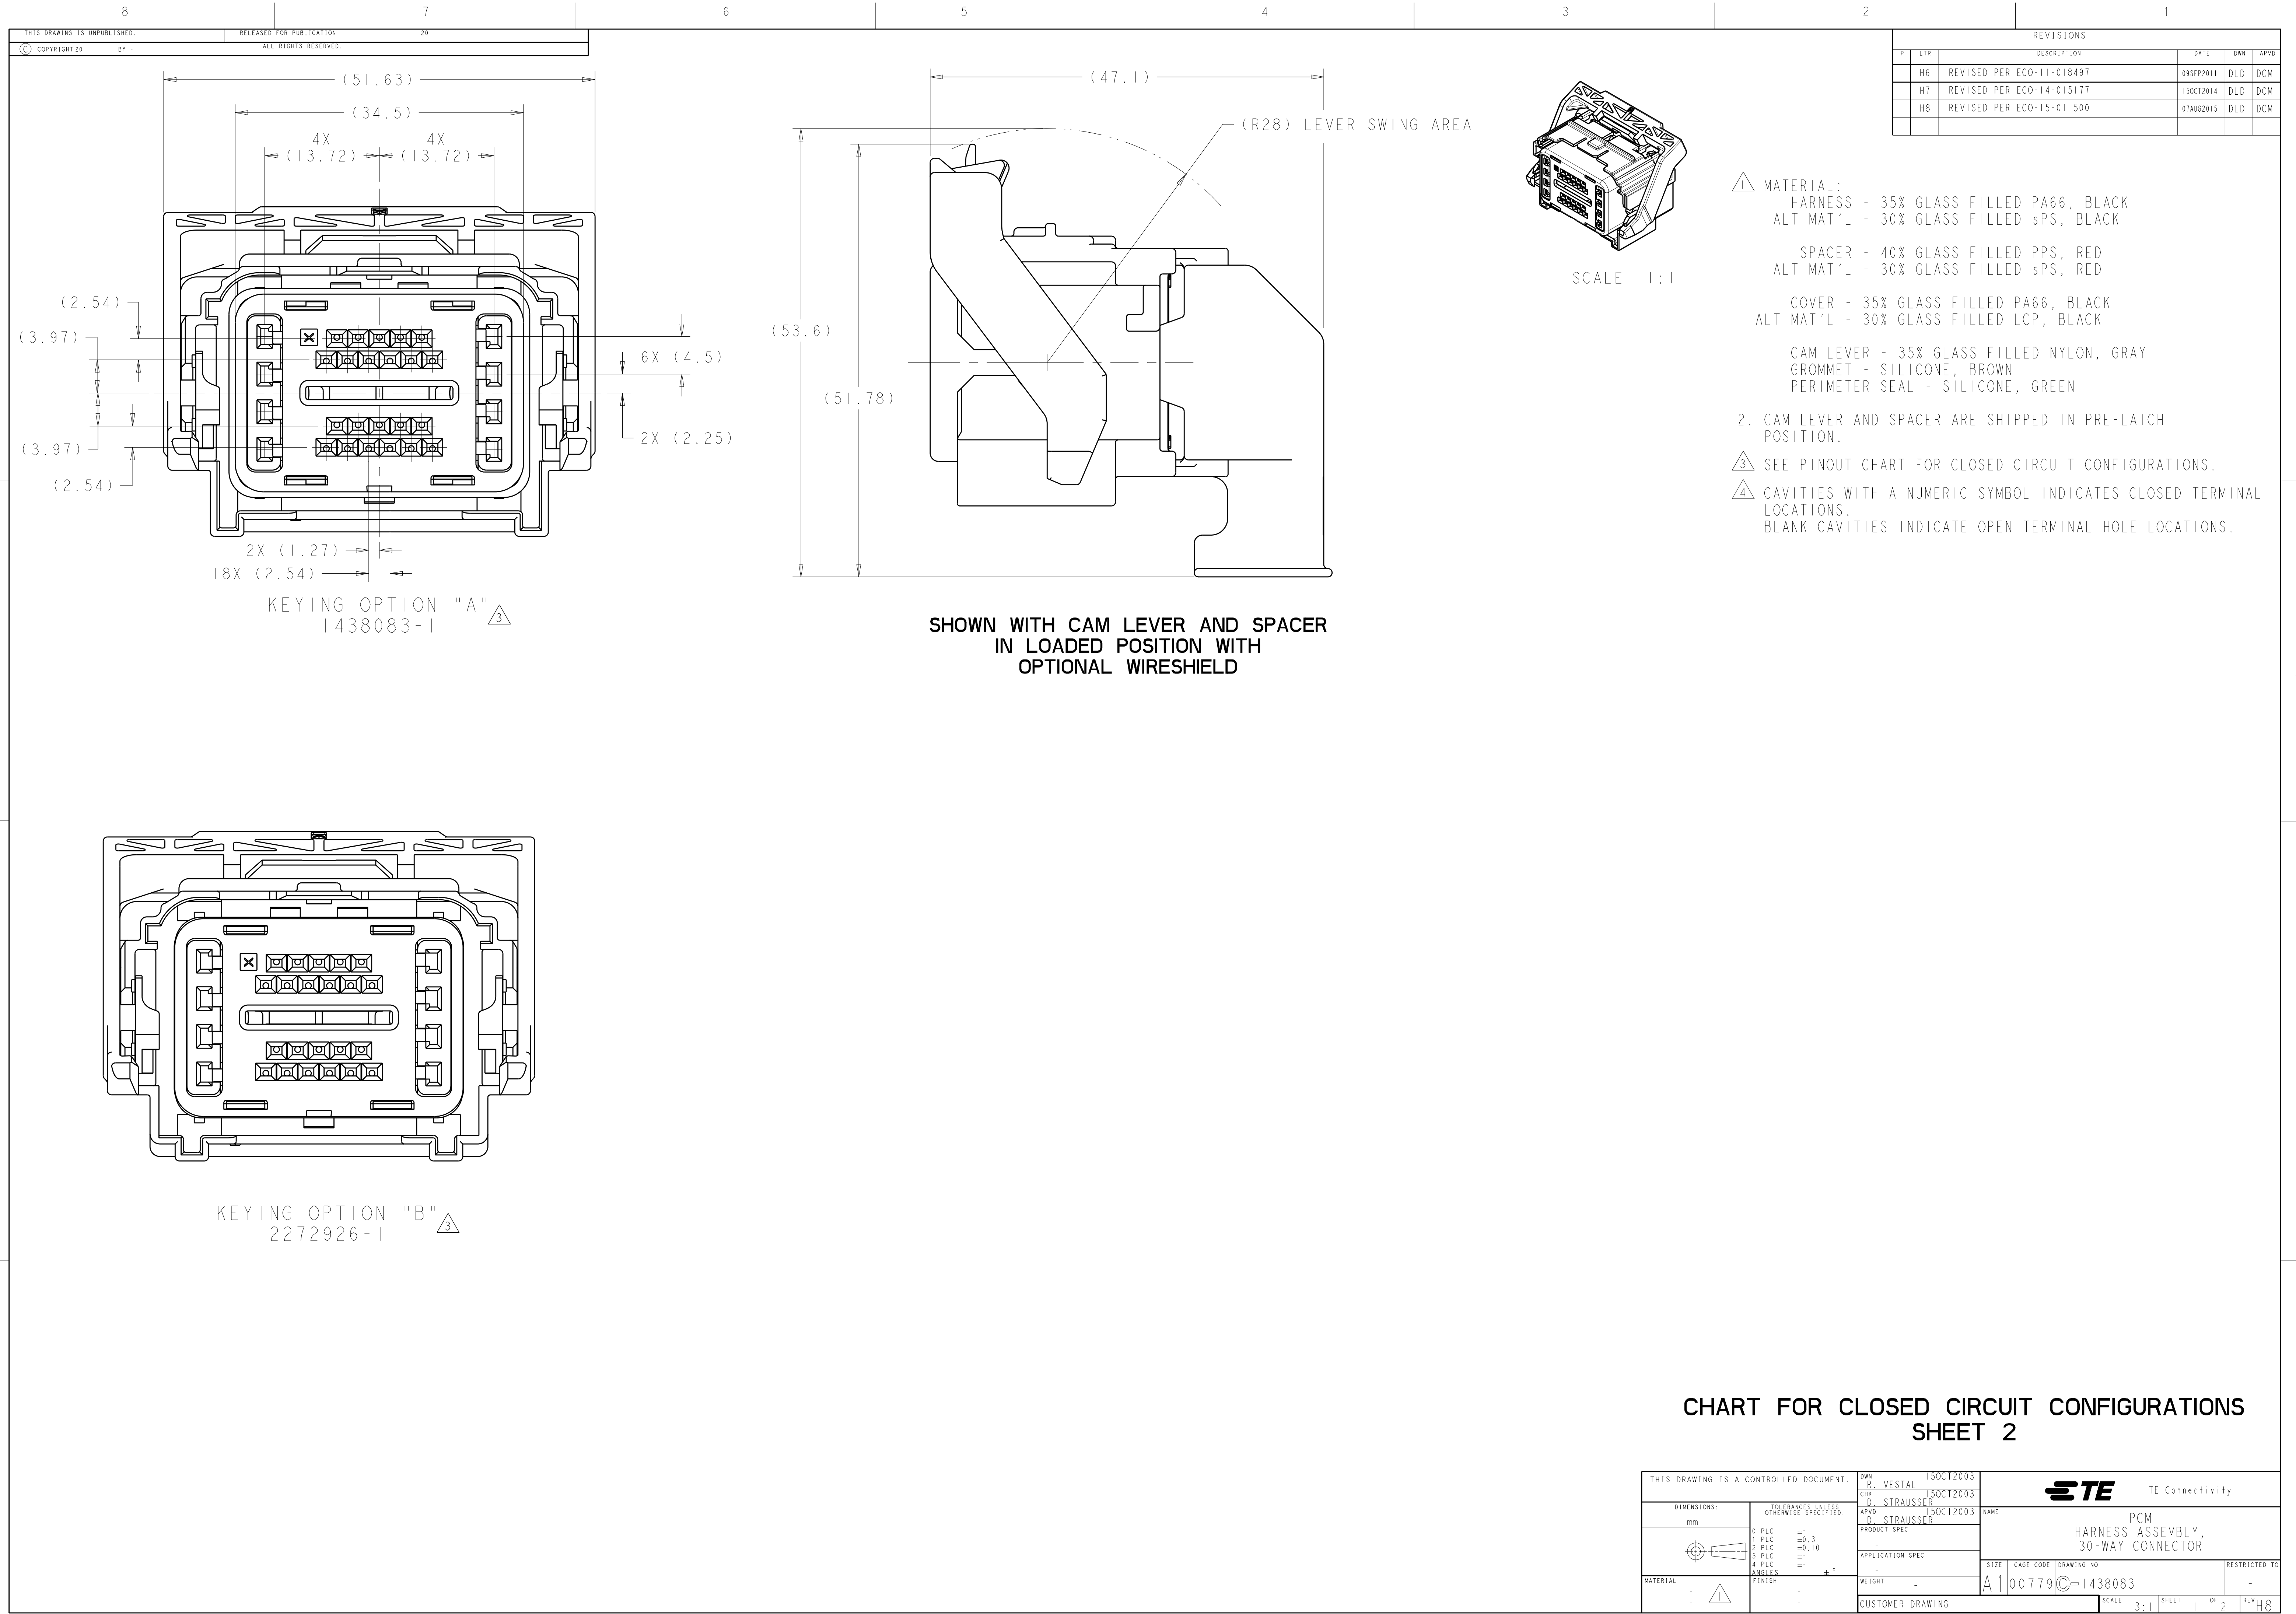

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
H6		REVISED PER ECO-11-018497	09SEP2011	DLD	DCM
H7		REVISED PER ECO-14-015177	15OCT2014	DLD	DCM
H8		REVISED PER ECO-15-011500	07AUG2015	DLD	DCM

- △ MATERIAL:
- HARNESS - 35% GLASS FILLED PA66, BLACK
ALT MAT'L - 30% GLASS FILLED sPS, BLACK
- SPACER - 40% GLASS FILLED PPS, RED
ALT MAT'L - 30% GLASS FILLED sPS, RED
- COVER - 35% GLASS FILLED PA66, BLACK
ALT MAT'L - 30% GLASS FILLED LCP, BLACK
- CAM LEVER - 35% GLASS FILLED NYLON, GRAY
GROMMET - SILICONE, BROWN
PERIMETER SEAL - SILICONE, GREEN
2. CAM LEVER AND SPACER ARE SHIPPED IN PRE-LATCH POSITION.
- △ 3 SEE PINOUT CHART FOR CLOSED CIRCUIT CONFIGURATIONS.
- △ 4 CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS.
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE LOCATIONS.

CHART FOR CLOSED CIRCUIT CONFIGURATIONS
SHEET 2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL	15OCT2003	TE Connectivity	
		CHK D. STRAUSSER	15OCT2003		
DIMENSIONS:		APVD D. STRAUSSER	15OCT2003	NAME PCM HARNESS ASSEMBLY, 30-WAY CONNECTOR	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ±.1		APPLICATION SPEC	
		1 PLC ±0.3		WEIGHT	
		2 PLC ±0.10		CUSTOMER DRAWING	
		3 PLC ±.1		SCALE 3:1	
		4 PLC ±.1		SHEET 1 OF 2	
		ANGLES ±1°		REV H8	
		FINISH			

PIN-OUT CHART KEYING OPTION "B" PIN-OUT CHART KEYING OPTION "A" 4805 (3/13)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1438083-3](#)