

## Sales Outline Drawing

Revision

A


## Specifications:

Oscillation Frequency (Hz)	2000
Operating Voltage (Vp-p)	1 ~ 4
Rated Voltage (Vp-p)	3
Current Consumption Max. (mA)	35 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance ( $\Omega$ )	$40 \pm 6$
Operating Temperature ( $^{\circ}\text{C}$ )	$-30 \sim +70$
Storage Temperature ( $^{\circ}\text{C}$ )	$-40 \sim +80$
Lead Pin	Tin Plated Brass
Housing	NORYL
Weight (Grams)	2.0
Condition by wave soldering ( $^{\circ}\text{C}$ )	$245 \pm 5 / 3 \pm 0.5 \text{ sec}$
Condition by hand soldering ( $^{\circ}\text{C}$ )	$350 \pm 20 / \text{within 5 sec}$
Options	For other options contact factory


PS: Vp-p = 1/2duty, square wave

RoHS Compliant

## Dimensions: (units: mm)

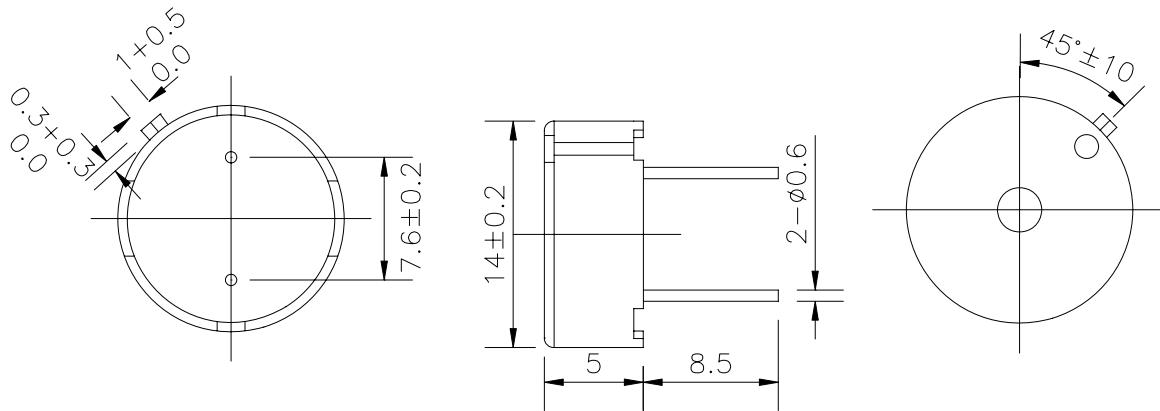

## Recommended Driving Circuit:

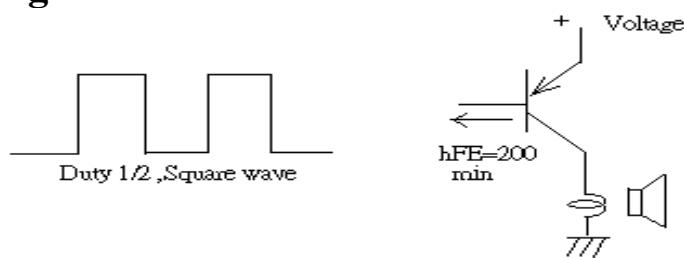

**The base current  $I_b$  should be high enough so that it saturates the collector current of the transistor with the CB load.**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PB-1420PL-03AQ](#)