



NOTE:
 MATERIAL
 INSULATION MATERIAL:PBT+GF.
 CONTACT MATERIAL:PHOSPHOR BRONZE
 CONTACT PLATED:Tin 100u" Min.
 MAIN SPCIFICATIONS
 CONTACT CURRENT PATING:1A
 WITHSTANDING VOLTAGE:AC 1000V 5s.
 INSULATION RESISTANCE:1000MΩ 500V DC.
 OPERATING TEMPERATURE:-55°C~105°C.

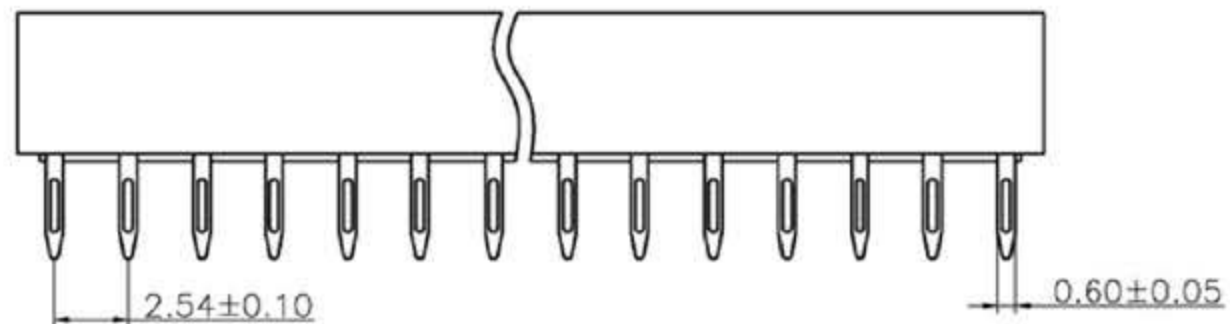

PIN NO.	DIM A	DIM B	DIM C	DIM D
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.1	15.24	17.78
40	50.8	48.26	15.24	17.78
48	60.69	58.42	15.24	17.78

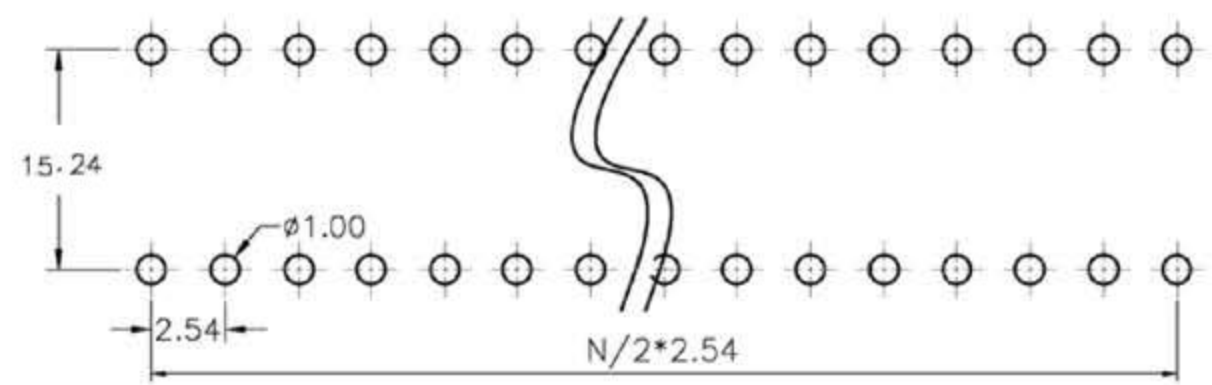

RECOMMENDED P.C.B LAYOUT

10/05/07	ING		NEW DWG		A0				
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			CnC Tech,LLC Industrial Cable and Connector Technology						
						TITLE: IC SOCKET PH:2.54mm DIP180 TIN PLATED			
X.X	±0.30	X.X*	±5.0°	APPD:	PRODUCT NO: 243-XX-1-06				
X.XX	±0.20	X.XX*	±3.0°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.10	X.XXX*	±1.0°	DRAW:	2010.05.07	1:1	mm	Z	1/1