

Fuse plug - P-FU 6,3X32 LA 250 - 3046524

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fuse plug, Connection method: Plug connection, Nominal current: 10 A, Width: 8.2 mm, Fuse type: G / 6,3 x 32, Fuse type: Glass / ceramics / ..., Mounting type: Plug-in mounting, Color: black

Product Features

- Large-surface labeling option
- Versions with bipolar defect indicator
- Test contacts on both sides of the fuse
- Can be used for overload/short-circuit protection



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	6.68 g
Custom tariff number	85369085
Country of origin	Germany

Technical data

General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Number of levels	1
Color	black
Insulating material	PA
Flammability rating according to UL 94	V0

Dimensions

Width	8.2 mm
Length	40 mm

Fuse plug - P-FU 6,3X32 LA 250 - 3046524

Technical data

General

Fuse	G / 6,3 x 32
Fuse type	Glass / ceramics / ...
Degree of pollution	3
Maximum power dissipation	1.6 W (Short-circuit and overload protection)
LED voltage range	110 V AC/DC ... 250 V AC/DC
LED current range	0.41 mA ... 0.96 mA
Maximum load current	10 A (the current is determined by the fuse used)
Nominal current I _N	10 A (the current is determined by the fuse used)
Open side panel	No

Connection data

Connection method	Plug connection
-------------------	-----------------

Ambient conditions

Ambient temperature (operation)	125 °C
---------------------------------	--------

Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27141199
eCl@ss 4.1	27141199
eCl@ss 5.0	27141145
eCl@ss 5.1	27141145
eCl@ss 6.0	27141151
eCl@ss 7.0	27141151
eCl@ss 8.0	27142001

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000899
ETIM 5.0	EC000036

UNSPSC

UNSPSC 6.01	30211812
-------------	----------

Fuse plug - P-FU 6,3X32 LA 250 - 3046524

Classifications

UNSPSC

UNSPSC 7.0901	39121410
UNSPSC 11	39121411
UNSPSC 12.01	39121411
UNSPSC 13.2	39121411

Approvals

Approvals


Approvals

CSA / EAC

Ex Approvals

Approvals submitted

Approval details


CSA 	
Nominal current I _N	10 A
Nominal voltage U _N	250 V

EAC

Drawings

Fuse plug - P-FU 6,3X32 LA 250 - 3046524


Application drawing

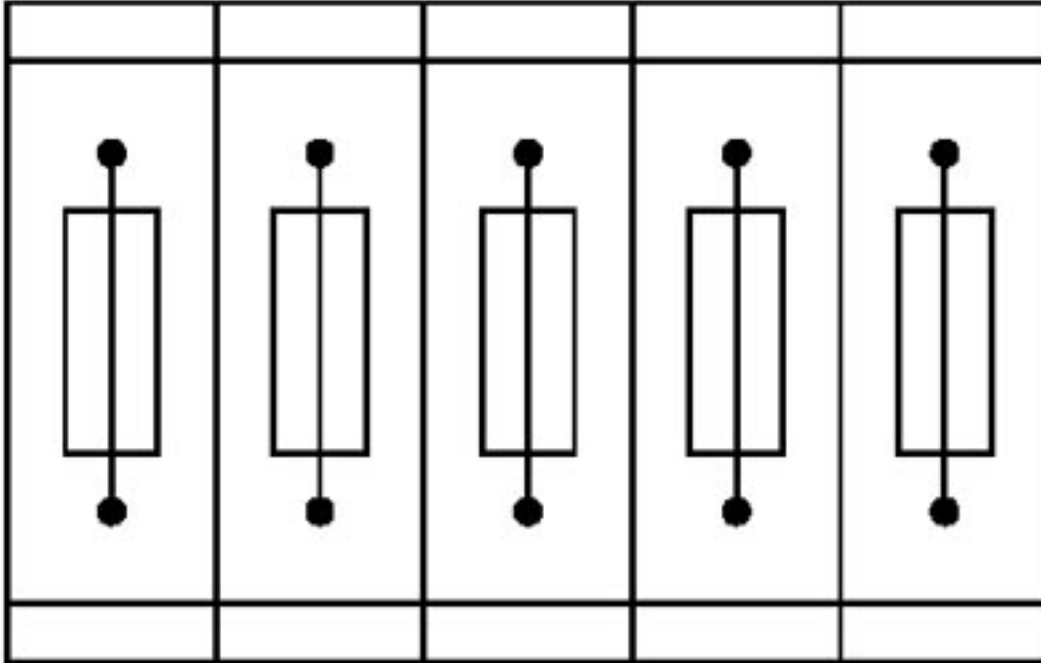

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

Fuse plug - P-FU 6,3X32 LA 250 - 3046524

Application drawing

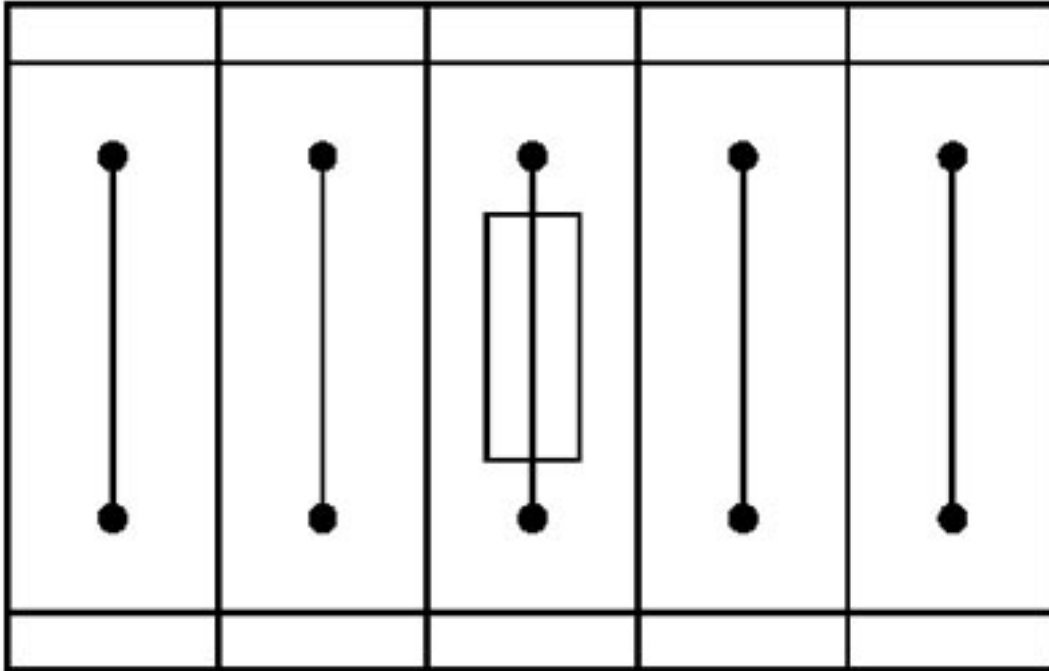

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[3046524](#)