

ORE Series

Features

- 105°C, 5,000 hours assured
- Ultra low ESR with large permissible ripple current
- RoHS Compliance



Marking color: Blue


Specifications

Items	Performance										
Category Temperature Range	-55°C ~ +105°C										
Capacitance Tolerance	±20% (at 120Hz, 20°C)										
Leakage Current (at 20°C)*	Rated voltage applied, after 2 minutes at 20°C. See Standard Ratings										
Tanδ (at 120Hz, 20°C)	See Standard Ratings										
ESR (at 100k ~ 300k Hz, 20°C)	See Standard Ratings										
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>5,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	5,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	5,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C.											
Moisture Resistance	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	1,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them at 60°C, 90 to 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.											
Resistance to Soldering Heat * (Please refer to page 11 for soldering conditions)	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Within specified value</td> </tr> <tr> <td>ESR</td> <td>Within specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Capacitance Change	Within ±10% of initial value	Tanδ	Within specified value	ESR	Within specified value	Leakage Current	Within specified value		
	Capacitance Change	Within ±10% of initial value									
	Tanδ	Within specified value									
	ESR	Within specified value									
Leakage Current	Within specified value										
* For any doubt about measured values, measure the leakage current again after the following voltage treatment. Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.											
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <th>Frequency (Hz)</th> <th>120 ≤ f < 1k</th> <th>1k ≤ f < 10k</th> <th>10k ≤ f < 100k</th> <th>100k ≤ f < 500k</th> </tr> <tr> <td>Multiplier</td> <td>0.05</td> <td>0.3</td> <td>0.7</td> <td>1.0</td> </tr> </table>	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.05	0.3	0.7	1.0
	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k						
Multiplier	0.05	0.3	0.7	1.0							

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.
Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.

Diagram of Dimensions


5 φ, 6.3 φ and 8 φ × 6.5 ~ 8L

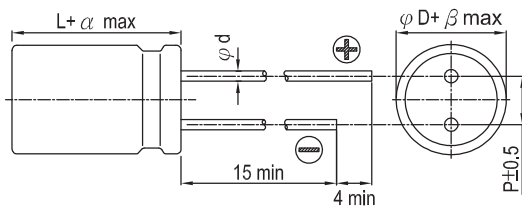

Lead Spacing and Diameter Unit: mm


φD	5	6.3	6.3	8	8	8	10
L	8	5.5	8	6.5	8	12	12
P	2.0	2.5		3.5		5.0	
φd	0.5	0.45	0.6				
α	1.0	0.5	1.0	0.5	1.0		
β	0.5						

8 φ × 12L and 10 φ × 12L

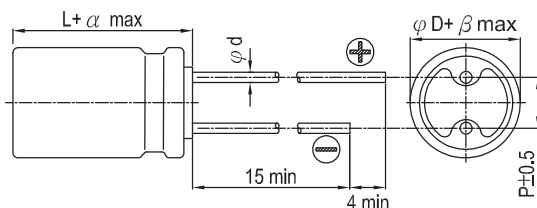


Marking

φD = 5 ~ 6.3

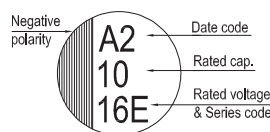

φD = 8 ~ 10

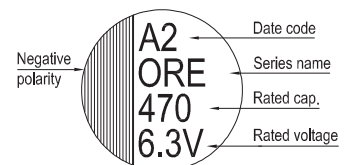



Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

W. V. (V)	Surge Voltage (V)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Tan δ (120Hz, 20°C)	L C (μA)	E S R (m Ω /at 100k ~ 300k Hz, 20°C Max)	Rated R. C. (mA/rms at 100k Hz, 105°C)
2.5V (0E)	2.9	330	6.3 × 8	0.10	500	5	5,900
		390	6.3 × 5.5	0.12	500	10	3,900
		470	5 × 8	0.10	500	7	4,180
			6.3 × 8	0.10	500	5	5,900
		560	5 × 8	0.10	500	7	4,180
			6.3 × 5.5	0.12	500	10	3,900
			6.3 × 8	0.10	500	5	5,900
			8 × 8	0.10	280	8	4,700
		820	6.3 × 8	0.10	500	5	5,900
			8 × 8	0.10	500	7	6,100
			8 × 12	0.10	500	7	6,100
		1,000	8 × 8	0.10	500	7	6,100
2,700	10 × 12	0.10	1,350	10	5,560		
4V(0G)	4.6	560	6.3 × 8	0.10	500	7	5,600
			8 × 8	0.10	500	7	6,100
			8 × 12	0.10	500	7	6,100
		680	8 × 12	0.10	544	7	6,100
		820	10 × 12	0.10	656	7	6,640
6.3V (0J)	7.2	470	6.3 × 8	0.10	592	7	5,600
			8 × 8	0.10	592	8	5,700
			8 × 12	0.10	592	8	5,700
		560	6.3 × 8	0.10	706	7	5,600
			8 × 8	0.10	706	7	6,100
		680	10 × 12	0.10	857	7	6,640
		1,500	10 × 12	0.10	1,890	10	5,560
10V(1A)	12.0	270	8 × 6.5	0.12	500	22	3,220
16V (1C)	18.0	100	6.3 × 5.5	0.10	320	24	2,490
			6.3 × 8	0.10	500	10	4,680
		150	8 × 6.5	0.12	500	22	3,220
			8 × 8	0.10	576	10	5,000
		180	8 × 12	0.10	576	16	4,360
			220	8 × 6.5	0.10	500	13
		270	6.3 × 8	0.10	864	10	5,080
			8 × 8	0.10	864	10	5,000
			8 × 12	0.10	864	11	5,000
		470	10 × 12	0.10	1,504	10	6,100
		560	8 × 12	0.12	1,792	14	4,950
1000	10 × 12	0.12	3,200	12	5,400		
20V(1D)	23.0	120	6.3 × 5.5	0.12	480	25	3,200
		180	8 × 6.5	0.12	720	25	3,200
		390	8 × 12	0.12	1,560	14	4,970
		560	10 × 12	0.12	2,240	12	5,600
25V(1E)	29.0	56	6.3 × 5.5	0.12	280	30	2,800
		82	8 × 6.5	0.12	410	28	3,000
		180	8 × 12	0.12	900	16	4,650
		330	10 × 12	0.12	1,650	14	5,000
35V(1V)	40.0	22	6.3 × 5.5	0.12	154	35	2,600
		39	8 × 6.5	0.12	273	30	2,800
		82	8 × 12	0.12	574	20	4,000
		120	10 × 12	0.12	840	18	4,400

OP-CAP

Part Numbering System

ORE Series 470 μF $\pm 20\%$ 2.5V Bulk Package Gas Type 6.3 ϕ × 8L Pb-free and PET coating case
ORE **471** **M** **0E** **BK** - **0608**
 Series Name Capacitance Capacitance Tolerance Rated Voltage Lead Configuration & Package Rubber Type Case Size Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lelon:

[ORE331M0EBK-0608](#) [ORE471M0EBK-0608](#) [ORE561M0EBK-0608](#) [ORE821M0EBK-0608](#) [ORE331M1EBK-1012](#)
[ORE101M1CBK-0608](#) [ORE271M1CBK-0808](#) [ORE101M1EBK-0812](#) [ORE820M1EBK-0807](#) [ORE471M0JBK-0808](#)
[ORE271M1CBK-0608](#) [ORE471M1CBK-1012](#) [ORE561M1DBK-1012](#) [ORE391M1DBK-0812](#) [ORE471M0JBK-0608](#)
[ORE102M1CBK-1012](#)