


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECO-16-004800	08SEP2016	NK	MZ
	D	REVISED PER ECO-17-004657	05APR2017	RS	MZ

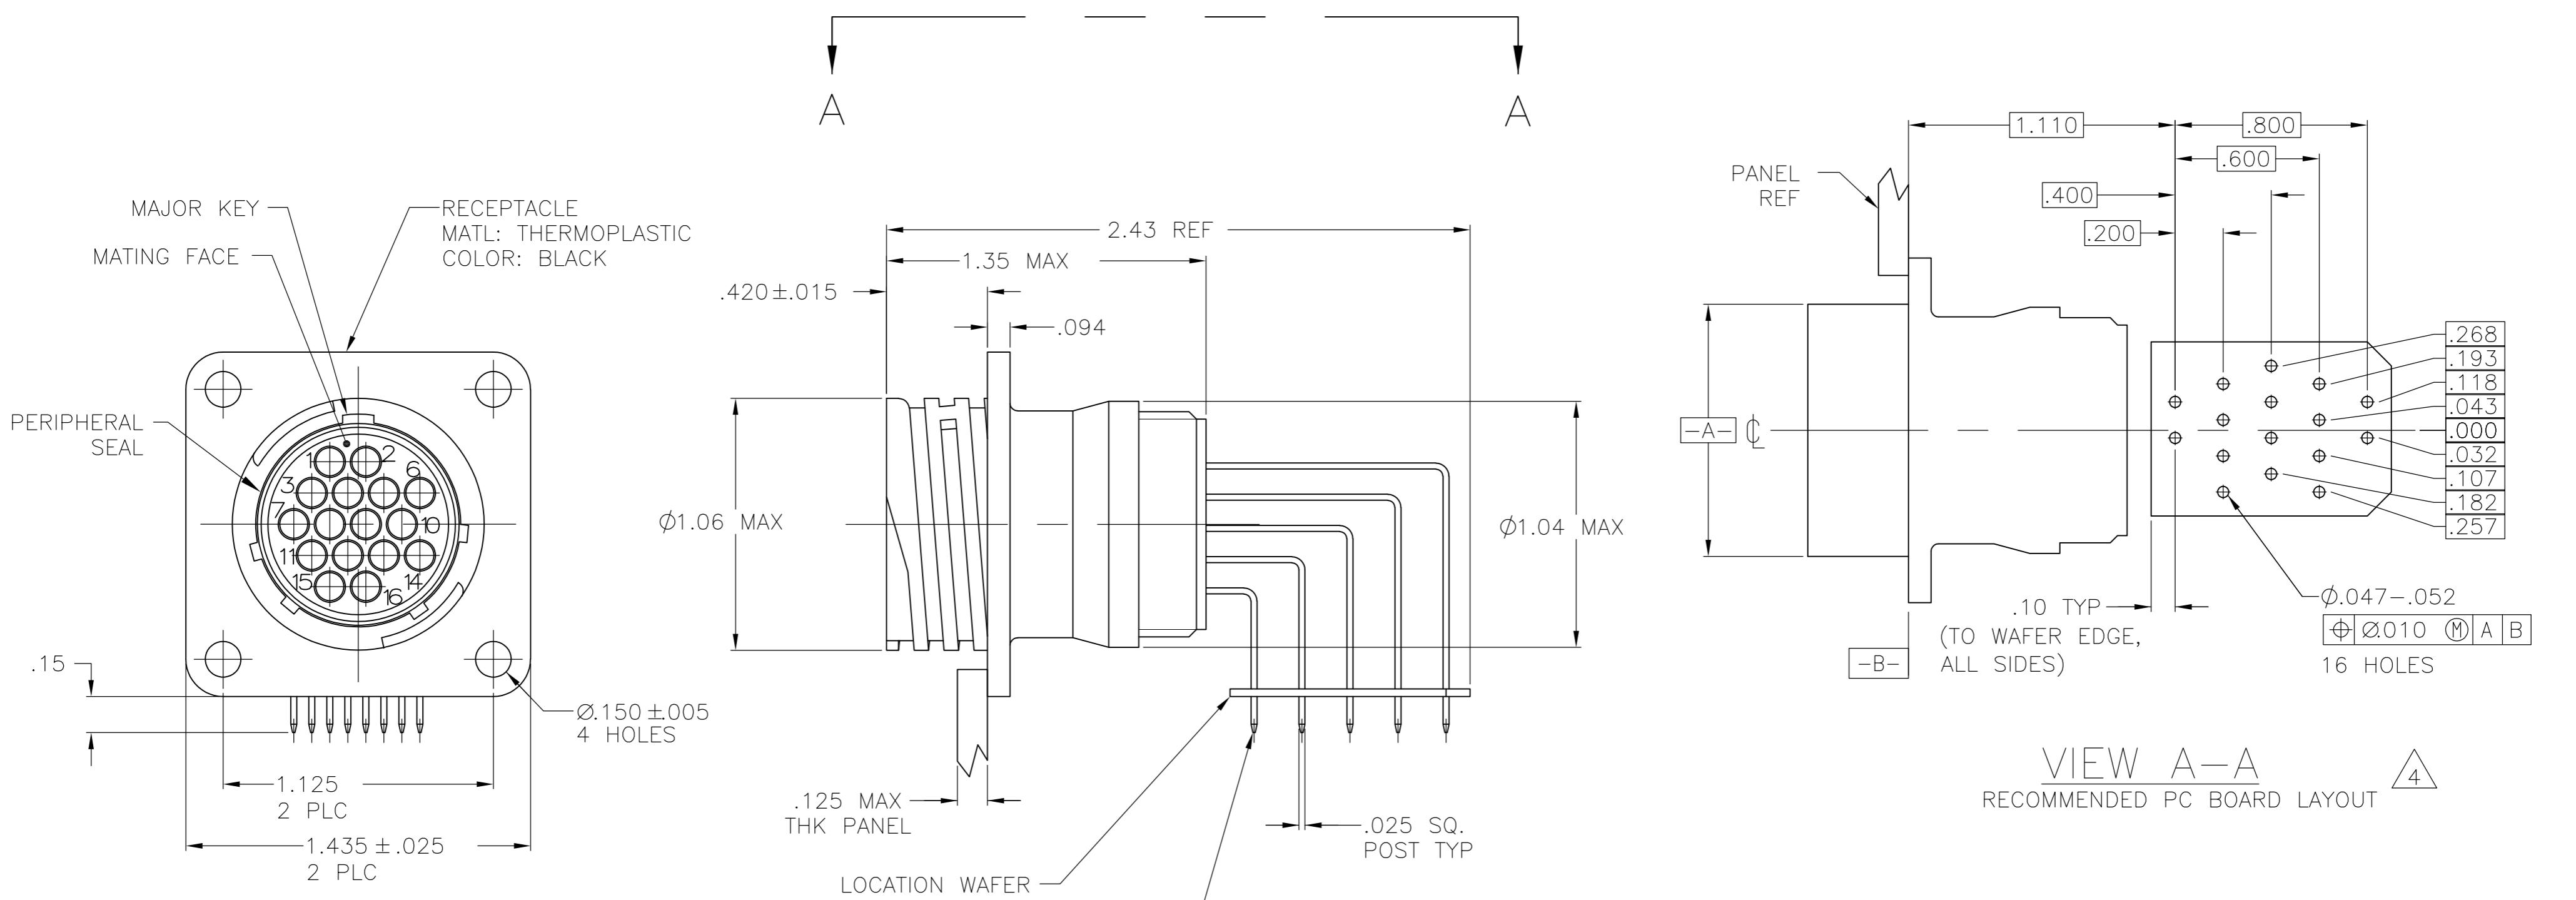

1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.

2 #6 FASTENER RECOMMENDED FOR MOUNTING.

3 CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.


CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.

4 PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.

5 CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.

CONTACT POST: .000100 MIN TIN OVER .000100 MIN COPPER.

6 CONTACT BODY AND POST PLATED TIN OVER NICKEL

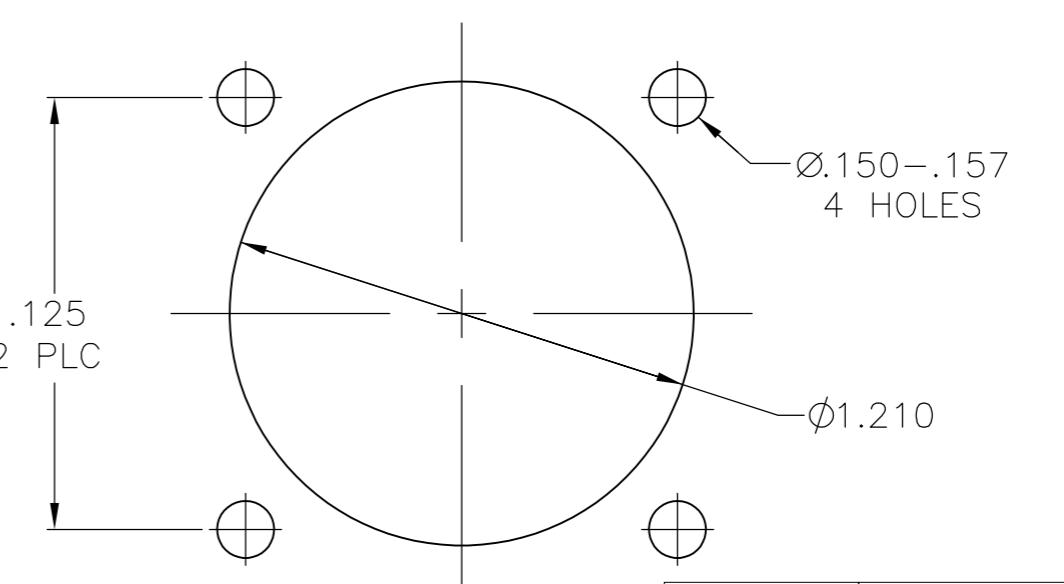

RECOMMENDED PANEL CUTOUT

OBsolete	YES	6	1-796404-2
	NO	5	1-796404-1
OBsolete	YES	3	796404-2
	NO	3	796404-1

PERIPHERAL SEAL	CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		4-5-00
HAMNER		4-6-00
CHK		4-6-00
M.CHACKO		
APVD		4-6-00
M.CHACKO		
PRODUCT SPEC		
		—
		APPLICATION SPEC
		—
		MATERIAL SPEC
		—
		WEIGHT
		—
		CUSTOMER DRAWING
		—
		SCALE
		2:1
		REVIEW
		1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-796404-2](#)