






LOC		DIST		REVISONS			
CM	53	F	LTR	DESCRIPTION		DATE	DWN
		P		REVISED PER ECO-11-005294		03MAY11	RK
							HMR

1 NYLON, UL94V-2, NATURAL.

2 DIMENSION TO BE CHECKED AT SURFACE A.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.

4. MALE CONTACTS MUST BE INSERTED SO THAT THE TOP OF THE WIRE AND INSULATION CRIMPS ARE FACING THE SIDE OF THE HOUSING WITH THE LOCKING LATCH.

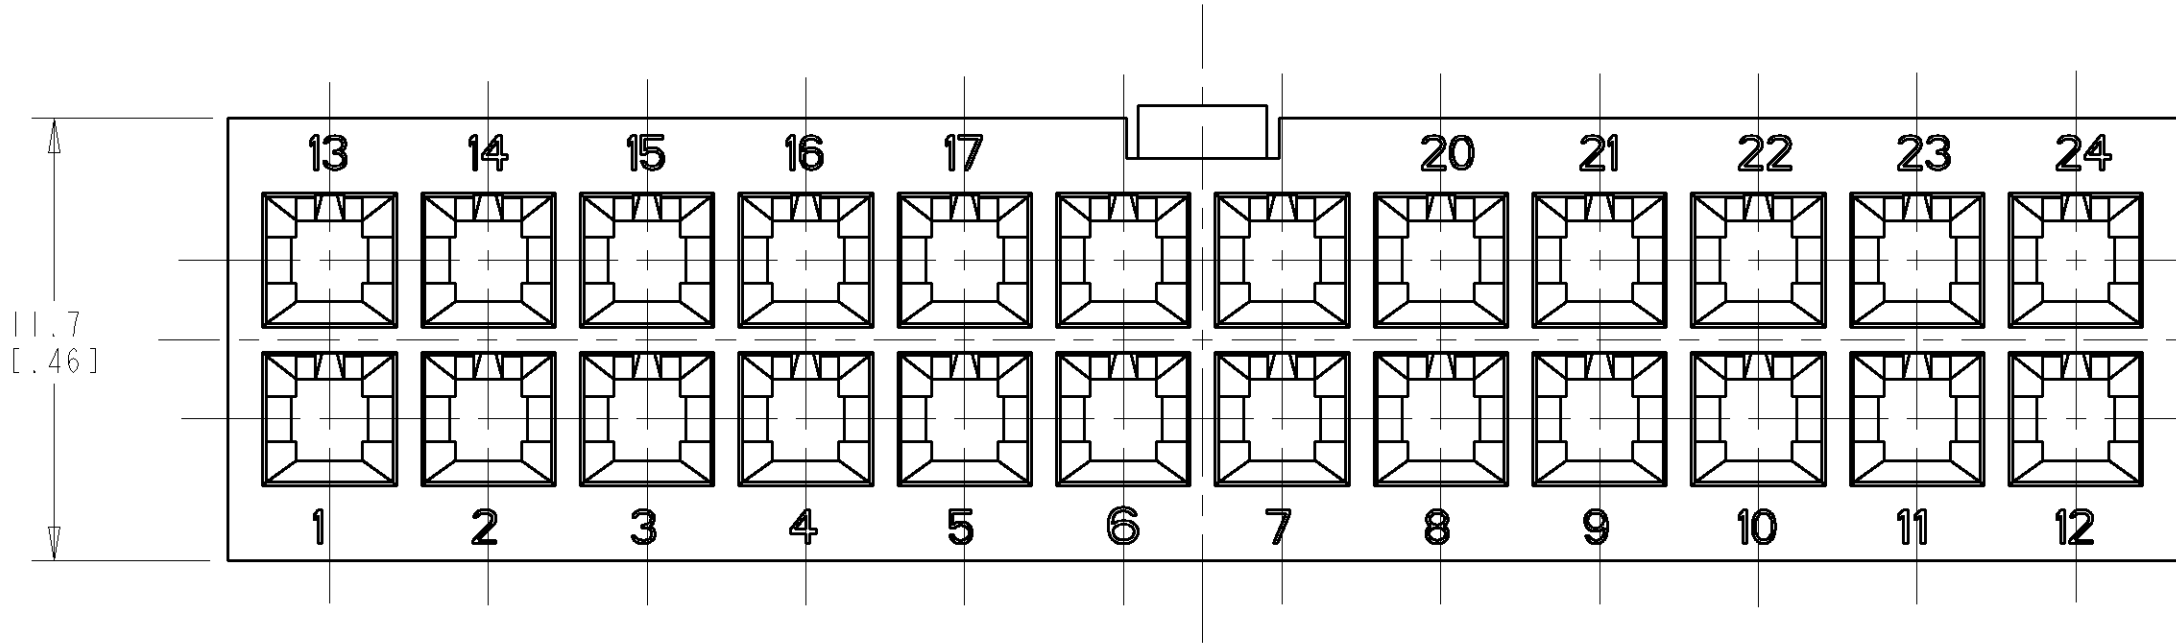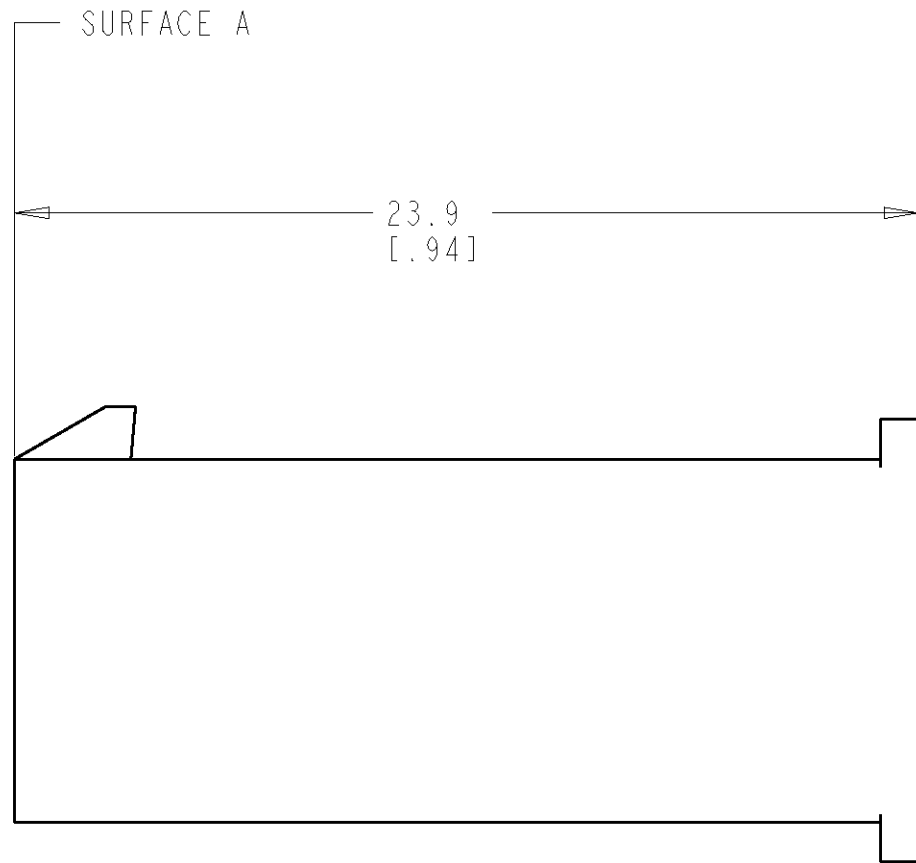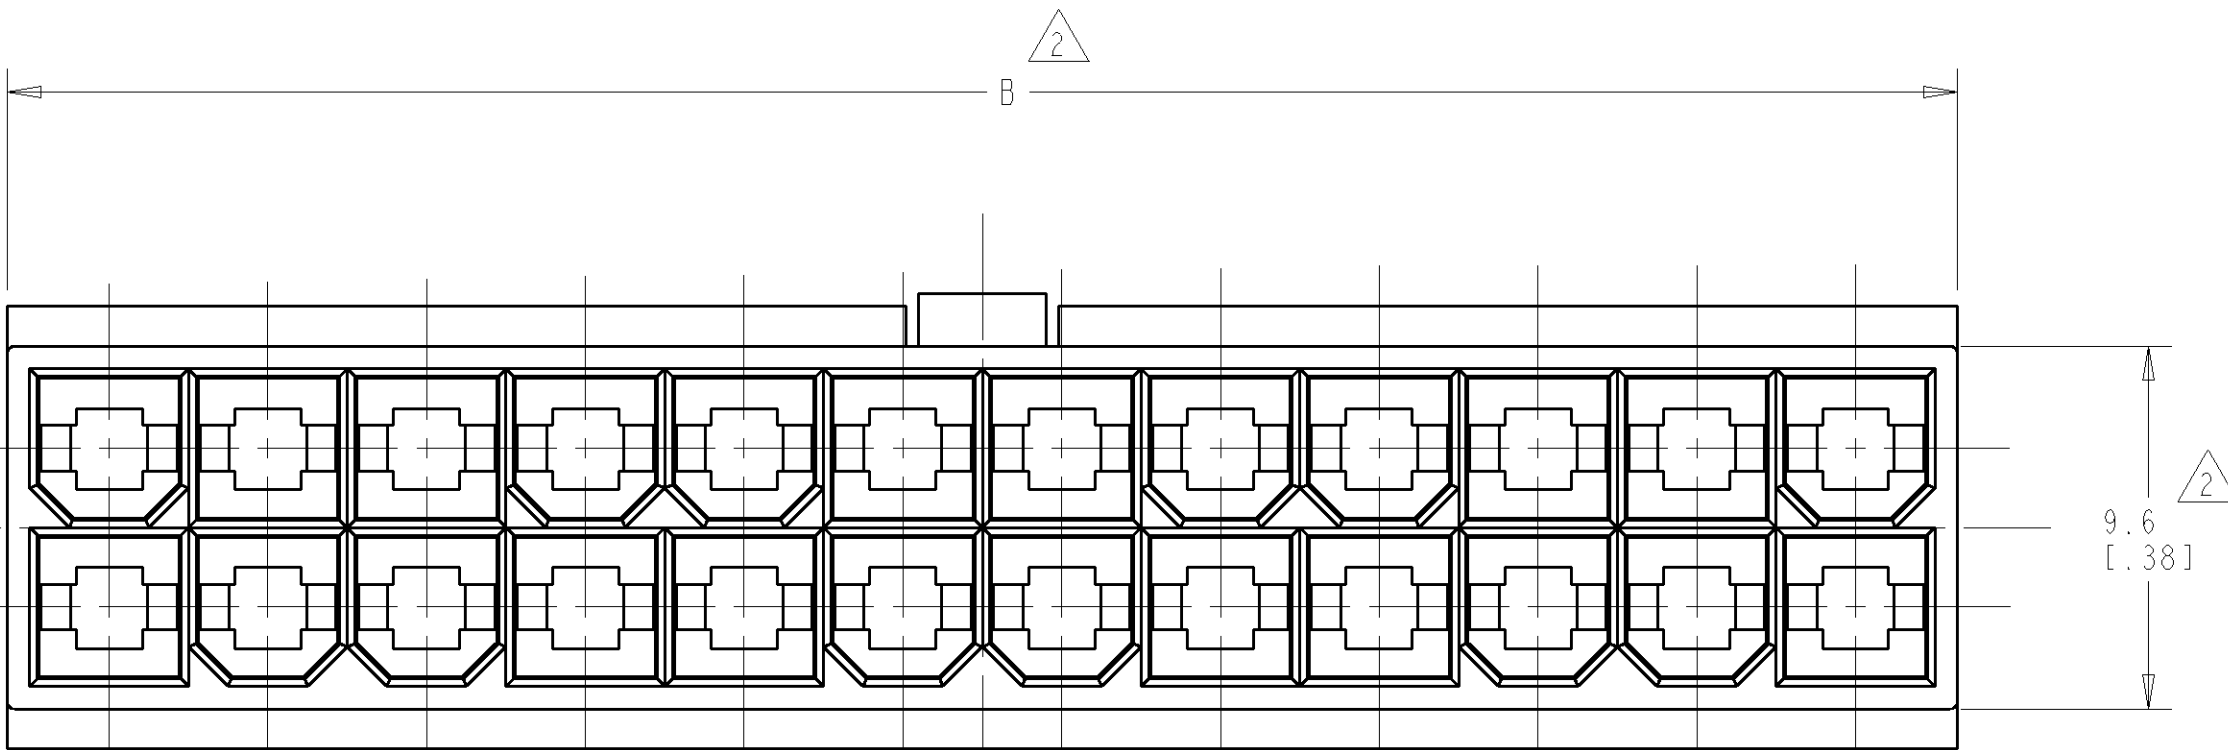

51.6[2.032]	24	2-794542-4
47.4[1.866]	22	2-794542-2
43.2[1.701]	20	2-794542-0
39[1.535]	18	1-794542-8
34.8[1.370]	16	1-794542-6
30.6[1.205]	14	1-794542-4
26.4[1.039]	12	1-794542-2
22.2[0.874]	10	1-794542-0
18[0.709]	8	794542-8
13.8[0.543]	6	794542-6
9.6[0.378]	4	794542-4
5.4[0.213]	2	794542-2
B	NO. OF POSITIONS	PART NUMBER

METRIC

DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN R. VESTAL 16MAR99	NAME	
9 PLC 1 PLC 2 PLC 3 PLC 4 PLC		± ±0.2[0.1] ± ± ±		CHK R. SWING 16MAR99	PLUG, FREE HANGING, 2 TO 24 POSITION, AMP-DUACT™ POWER CONNECTOR	
MATERIAL - 1		FINISH - 1		APVD C. CASH 16MAR99	SIZE A 1	
				PRODUCT SPEC -	CAGE CODE 00779	
				APPLICATION SPEC -	DRAWING NO. 794542	
				WEIGHT -	RESTRICTED TO -	
				CUSTOMER DRAWING	SCALE 4:1	
					SHEET 1 OF 1	
					REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794542-8](#)