

Specifications (measured @ Ta= 25°C, nom. Vin, full load otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition		Min.	Typ.	Max.
Input Filter			Pi-Type		
Input Voltage Range	nom. Vin = 24VDC nom. Vin = 48VDC		18VDC 36VDC	24VDC 48VDC	36VDC 75VDC
Input Surge Voltage	100ms max.	nom. Vin = 24VDC nom. Vin = 48VDC			50VDC 100VDC
Under Voltage Lockout (UVLO)	nom. Vin = 24VDC	DC-DC ON DC-DC OFF		14.5VDC	18VDC
	nom. Vin = 48VDC	DC-DC ON DC-DC OFF		30.5VDC	36VDC
Output Voltage Trimming	refer to "OUTPUT VOLTAGE TRIMMING"		-10%		+10%
Input Reflected Ripple ⁽⁴⁾	nominal Vin and full load			30mA _{p-p}	
Minimum Load			0%		
Start-up time	Power up				30ms
	Remote ON/OFF				30ms
ON/OFF CTRL ⁽⁵⁾ refer to "ON/OFF CTRL"	Positive Logic	DC-DC ON DC-DC OFF	Open or 3.0VDC < V _{CTRL} < 15VDC Short or 0VDC < V _{CTRL} < 1.2VDC		
	Negative Logic	DC-DC ON DC-DC OFF	Short or 0VDC < V _{CTRL} < 1.2VDC Open or 3.0VDC < V _{CTRL} < 15VDC		
Input Current of CTRL pin	drive current	I _{CTRL}	-0.5mA		+1.0mA
Standby Current	DC-DC OFF	I _{in}			20mA
Internal Operating Frequency	3.3Vout, 5Vout		243kHz	270kHz	297kHz
	Others		423kHz	470kHz	517kHz
Output Ripple and Noise	measured at 20MHz BW with a 1µF M/C X7R and 10µF T/C	3.3Vout, 5Vout 12Vout, 15Vout		75mV _{p-p} 100mV _{p-p}	


Notes:

Note4: Simulated source impedance of 12µH. 12µH inductor in series with +Vin.


Note5: If no suffix is specified, the control pin will be omitted. If fitted, the ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin

RP15-2405SOF

Efficiency vs. Output Current

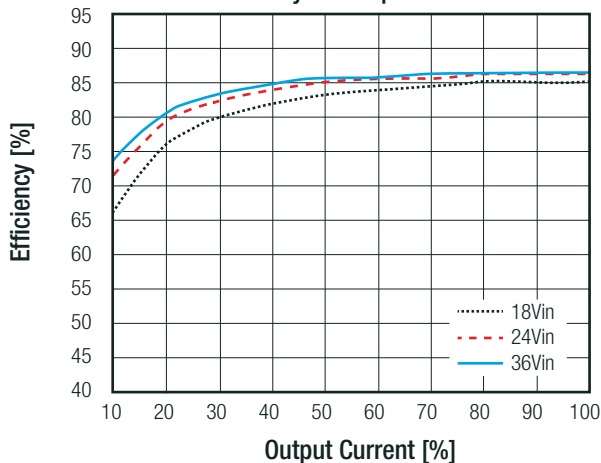

Efficiency vs. Input Voltage

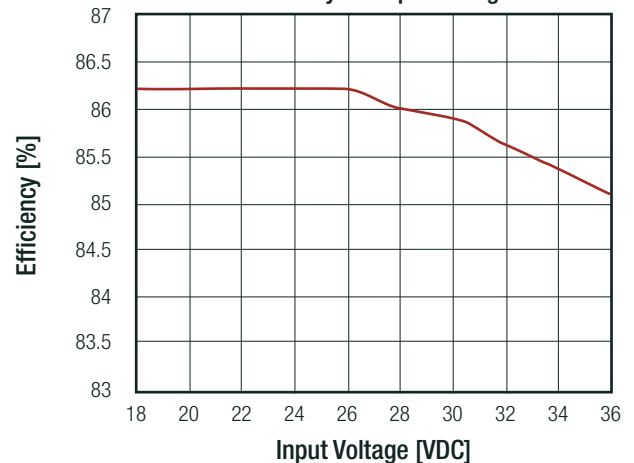


continued on next page


Specifications (measured @ Ta= 25°C, nom. Vin, full load otherwise stated)

RP15-4805SOF


Efficiency vs. Output Current

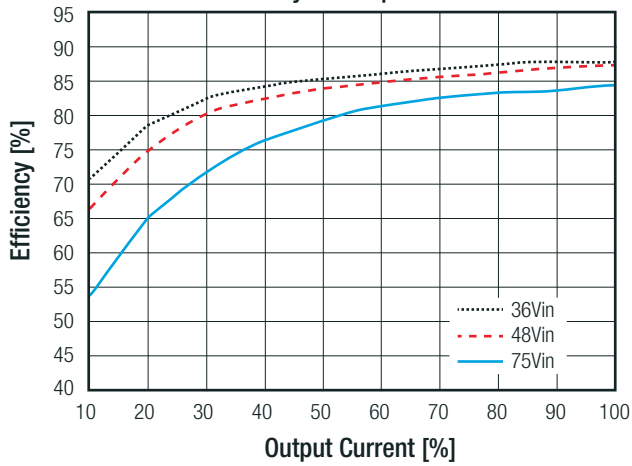

Efficiency vs. Input Voltage

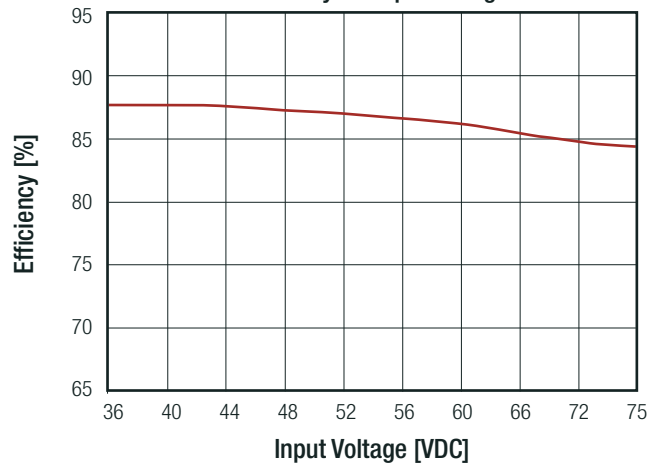

ON/OFF CTRL

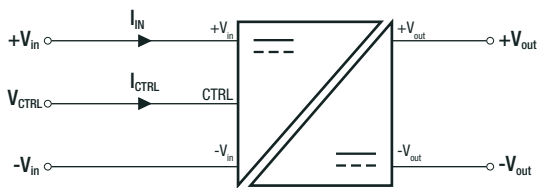


Positive Logic	DC-DC ON	Open or 3.0VDC < V _{CTRL} < 15VDC
	DC-DC OFF	Short or 0VDC < V _{CTRL} < 1.2VDC
Negativ Logic	DC-DC ON	Short or 0VDC < V _{CTRL} < 1.2VDC
	DC-DC OFF	Open or 3.0VDC < V _{CTRL} < 15VDC

OUTPUT VOLTAGE TRIMMING

Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

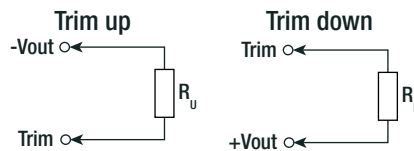

RP15-xx3.3SOF

Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63	[VDC]
R _u =	385.07	191.51	126.99	94.73	75.37	62.47	53.25	46.34	40.96	36.66	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97	[VDC]
R _d =	116.72	54.78	34.13	23.81	17.62	13.49	10.54	8.32	6.60	5.23	[kΩ]

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load otherwise stated)

RP15-xx05S0F											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	[VDC]
R _y =	253.45	125.70	83.12	61.82	49.05	40.53	34.45	29.89	26.34	23.50	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50	[VDC]
R _y =	248.34	120.59	78.01	56.71	43.94	35.42	29.34	24.78	21.23	18.39	[kΩ]
RP15-xx12S0F											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	[VDC]
R _y =	203.22	99.06	64.33	46.97	36.56	29.61	24.65	20.93	18.04	15.72	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.8	[VDC]
R _y =	776.56	380.72	248.78	182.81	143.22	116.83	97.98	83.85	72.85	64.06	[kΩ]
RP15-xx15S0F											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	15.15	15.3	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50	[VDC]
R _y =	161.56	78.22	50.45	36.56	28.22	22.67	18.70	15.72	13.41	11.56	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50	[VDC]
R _y =	818.22	401.56	262.67	193.22	151.56	123.78	103.94	89.06	77.48	68.22	[kΩ]

REGULATIONS		
Parameter	Condition	Value
Output Accuracy		±1.0%
Line Regulation	low line to high line, full load	±0.2%
Output Overshoot		3.0% typ.
Load Regulation	0% to 100% load	±0.2%
Transient Response Recovery Time	25% load step change	300µs typ.

PROTECTIONS		
Parameter	Condition	Value
Short Circuit Protection (SCP)		continuous, automatic recovery
Over Voltage Protection (OVP)	zener diode clamp	3.3Vout 5Vout 12Vout 15Vout 3.7 - 5.4VDC 5.6 - 7.0VDC 13.5 - 19.6VDC 16.8 - 20.5VDC
Over Load Protection (OLP)	% of Iout rated	150% typ., Hiccup mode
Isolation Voltage ⁽⁶⁾	I/P to O/P	2.25kVDC/1 minute
Isolation Resistance	Viso= 500VDC	10MΩ min.
Isolation Capacitance		1000pF typ.

Notes:

Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage


Note7: This power module is not internally fused. An input line fuse must always be used

Specifications (measured @ Ta= 25°C, nom. Vin, full load otherwise stated)

ENVIRONMENTAL

Parameter	Condition	Value
Lead-free reflow solder process		IPC J-STD-020D
Moisture sensitivity level (MSL)		IPC J-STD-03B level 2a
Operating Temperature Range	without derating	-40°C to 76°C
	with derating	-40°C to +105°C
Temperature Coefficient		±0.02%/K max.
Operating Humidity	non-condensing	5% - 95%, RH
Thermal Shock		according to MIL-STD-810F
Vibration		according to MIL-STD-810F
MTBF	MIL-HDBK-217F, G.B. ⁽⁸⁾	3438 x 10 ³ hours
	Bellcore TR-NWT-000332 ⁽⁹⁾	2200 x 10 ³ hours

Derating Graph ⁽⁹⁾

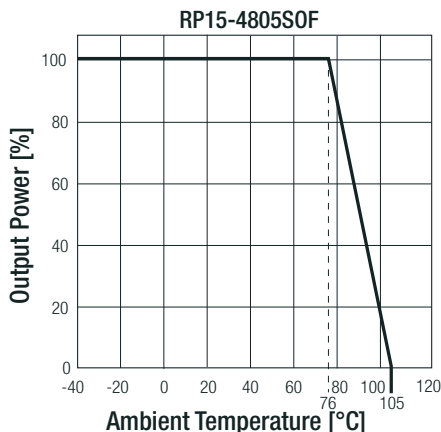

Notes:

- Note8: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C. MIL-HDBK 217F Notice 2. Ta = 25°C, full load, (Ground, Benign, controlled environment).
- Note9: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact RECOM Techsupport for detailed information

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Condition	Standard
Information Technology Equipment, General Requirements for Safety	E196683	UL60950-1, 1st Edition, 2007 CAN/CSA-C22.2 No. 60950-1-03, 1st Edition, 2006
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2		RoHS-2011/65/EU + AM-2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class A and B
Radiated, radio-frequency, electromagnetic field immunity test	10 V/m	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity ⁽¹⁰⁾	±2kV	EN61000-4-4, Criteria B
Surge Immunity ⁽¹⁰⁾	±1kV	EN61000-4-5, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	10 Vr.m.s	EN61000-4-6, Criteria A
Power Magnetic Field Immunity	100A/m continuous; 1000A/m 1s	EN61000-4-8, Criteria A


Notes:

- Note10: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5
Recom suggests Nippon chemi-con KY series 220µF/100V

continued on next page


Specifications (measured @ Ta= 25°C, nom. Vin, full load otherwise stated)

EMC Filtering Suggestions according to EN55032

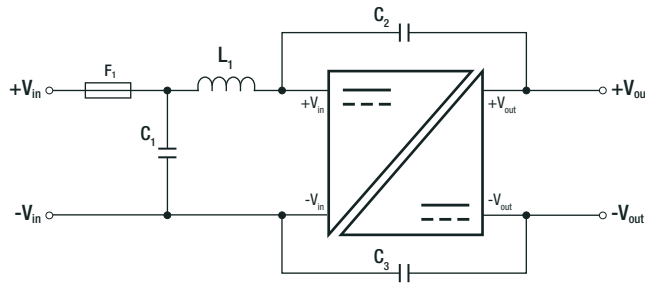

Component List Class A

MODEL	C1	C2/C3	L1
RP15-24xxSOF	6.8µF/50V, 1812 MLCC	470pF/3kV, 1808 MLCC	10iH 1.4A 0.1Ω 0504 SMD Inductor ref.: WE 744787100
RP15-48xxSOF	2.2µF/100V, 1812 MLCC	470pF/3kV, 1808 MLCC	18iH 1.2A 0.15Ω 0504 SMD Inductor ref.: WE 744787180

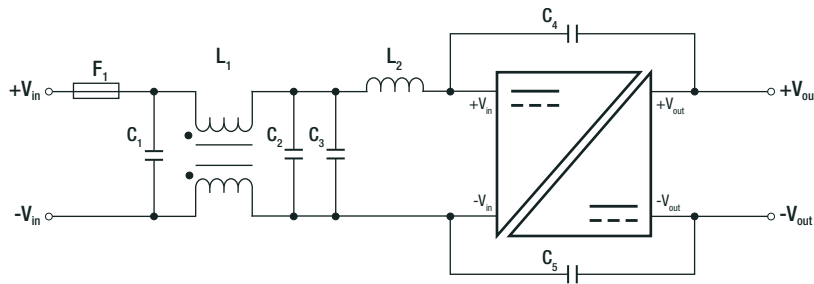

Component List Class B

MODEL	C1	C2	C3	C4/C5	L1	L2
RP15-24xxSOF	6.8µF/50V 1812 MLCC	6.8µF/50V 1812 MLCC	6.8µF/50V 1812 MLCC	470pF/3kV 1808 MLCC	CMC: 145µH ref.: WE 7482210002 ref.: CMC-07	10iH 1.4A 0.1Ω 0504 SMD Inductor ref.: WE 744787100
RP15-48xxSOF	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	470pF/3kV 1808 MLCC	CMC: 145µH ref.: WE 7482210002 ref.: CMC-07	18iH 1.2A 0.15Ω 0504 SMD Inductor ref.: WE 744787180






DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	base	FR4 PCB
Dimensions (LxWxH)		27.9 x 23.9 x 8.5mm
Weight		10.5g

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load otherwise stated)

Dimension Drawing (mm)

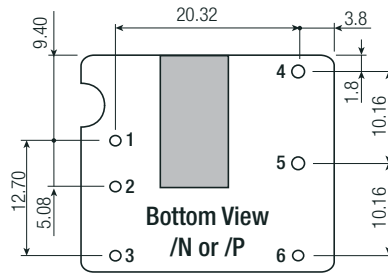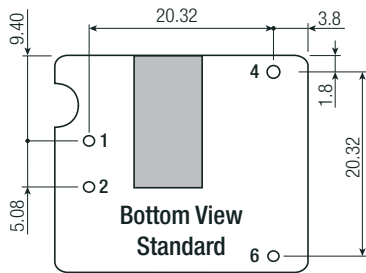

Pinning Information

Pin #	Standard	with Suffix /P or /N
1	+Vin	+Vin
2	-Vin	-Vin
3	no Pin	CTRL
4	+Vout	+Vout
5	no Pin	Trim
6	-Vout	-Vout

PCB Tolerance ±0.5mm
SMD Pin Pitch Tolerance ±0.25mm

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	255.0 x 29.0 x 12.0mm
Packaging Quantity		20pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity	non-condensing	5% - 95% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.