

Mounting flange - VC-D-AF - 1855319

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel mounting flange for screw locking, for fixing the crimp contact insert to the housing panel, with two M3 threaded holes and one M4 threaded hole

Product Features

- Positions 15, 30, 50, and 65 are available, in accordance with housing sizes VC 1 - VC 4.
- Contact types meet the requirements of IEC 60352/DIN EN 60352
- The connection data of 250 V/10 A corresponds to that of the HEAVYCON DD series
- Pin and socket contacts can be used on both the plug and device sides
- Contact carriers have two further capacitive PE contacts



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	20 pc
GTIN	4 017918 159306
Weight per Piece (excluding packing)	4.4 g
Custom tariff number	85389099
Country of origin	Poland

Technical data

Electrical characteristics

Note	2 for every connector
------	-----------------------

Classifications

eCl@ss

eCl@ss 4.0	27140816
------------	----------

Mounting flange - VC-D-AF - 1855319

Classifications

eCl@ss

eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440210
eCl@ss 9.0	27440210

ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC002498
ETIM 5.0	EC002310

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details

EAC

Mounting flange - VC-D-AF - 1855319

Drawings

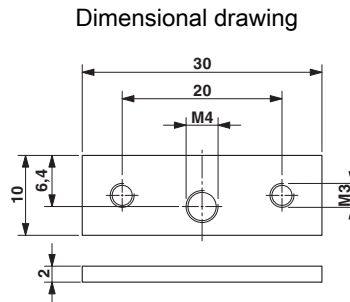

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1855319](#)