
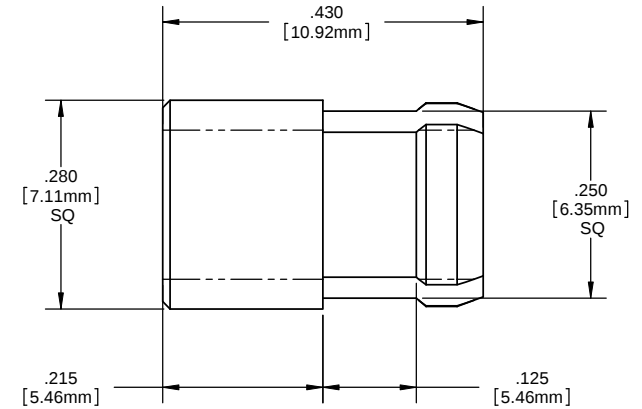



NOTES:

1. MOUNTING: Mounts in a $\phi .250 \pm .002$ [$\phi 6.35\text{mm} \pm .05$] square punched hole on .375 [9.5mm] centers. Panel thickness .063 [1.6mm] to .125 [3.17mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.


REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR111009AZ01	4-23-10	SMU



ORDERING CODE : **SQL 360 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		MATERIAL POLYCARBONATE, UL 94-V2		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com		
ANGLES ±1° FINISH	DECIMALS .X ±.020 .XX ±.010 .XXX ±.005	FINISH SEE NOTES		TITLE: 5MM SQUARE STANDARD HEIGHT FRESNEL LENS		
BREAK ALL CORNERS AND SHARP RADIIES 30° MAX		THIRD ANGLE PROJECTION		SIZE		
PROPRIETARY AND CONFIDENTIAL THIS DRAWING IS THE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. IT IS TO BE USED FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF VISUAL COMMUNICATIONS COMPANY, INC.		APPROVAL	DATE	DWG. NO.		REV
DRAWN: SMU		SMU	4-23-10	B SQL 360 XXX		001
CHECKED: DZ		DZ	4-23-10	SCALE: 1:1 SHEET 1 OF 1		
DO NOT SCALE DRAWING						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[SQL_360_CTP](#) [SQL_360_RTP](#)