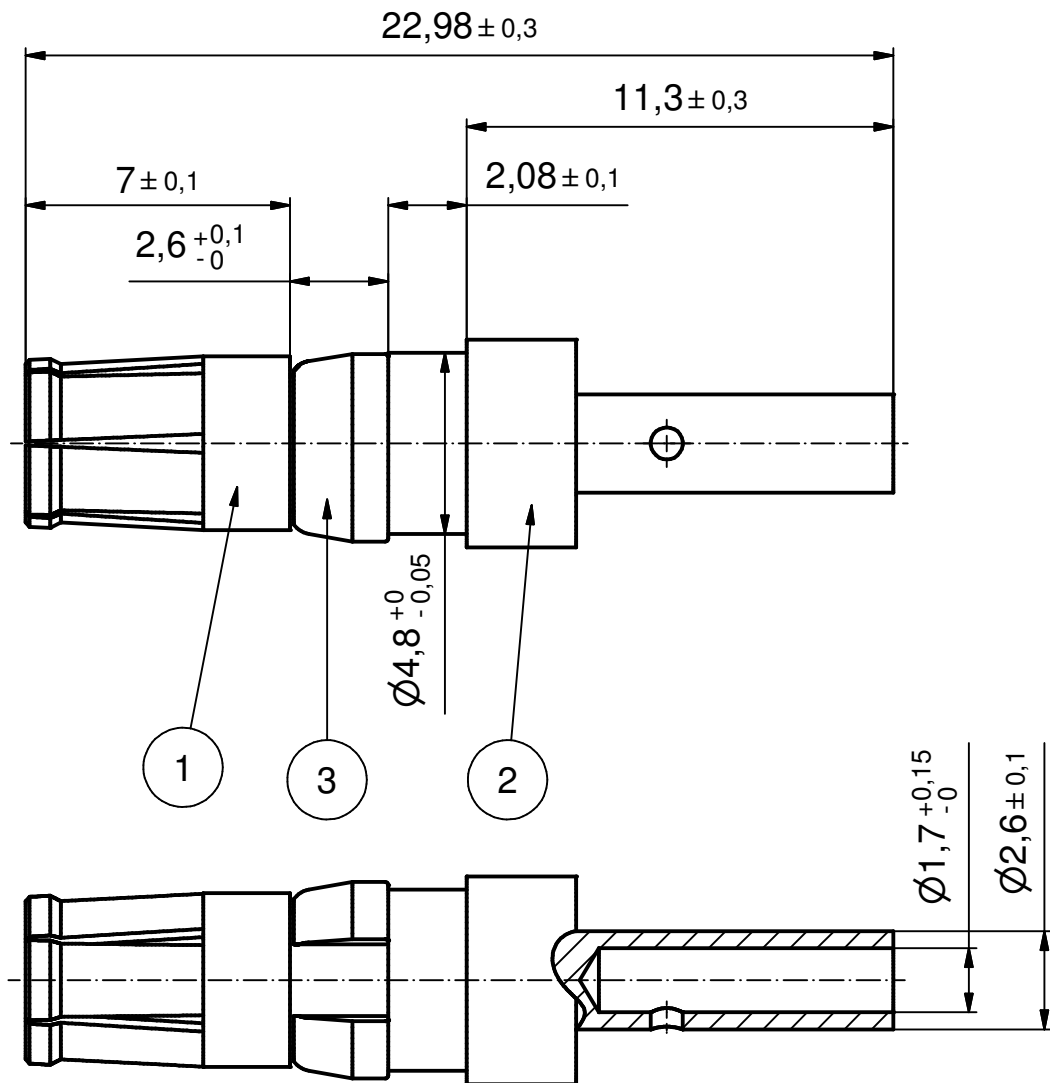


STRIPPING DIMENSIONS

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

(b) ITEM 1+2: GOLD FLASH over NICKEL

ITEM 3: NICKEL PLATED

3. CRIMPING: USE CRIMP TOOL 360X10409X

WITH TOOL INSERT 360X20029X

SELECTOR SETTINGS: 3 FOR AWG 16

2 FOR AWG 18

2 FOR AWG 20

Directive 2002/95/EC RoHS compliant

(b)

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish:			
see notes			
2 x b	Ä3854	19.01.2011	K.H.
a	Origin		
rev.	description	date	name

tolerance	
ISO 2768-m	
dim. in mm	
date	name
drawn 26.07.06	Lehmenkühler
appd. 26.07.06	Kühle
norm	
d-old	

CONEC®

scale:	5:1		
material:	see notes		
title:			
HIGH POWER CONTACT FEMALE			
CRIMP VERSION 10A			
D-SUB COMBINATION			
dwg no:	Inventor 10		DIN-
13K1A1835		A4	
		sh: 1	
part no:	132A11019X		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[132A11019X](#)