


REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.
B	05/01/04	UPDATE DRAWING FORMAT

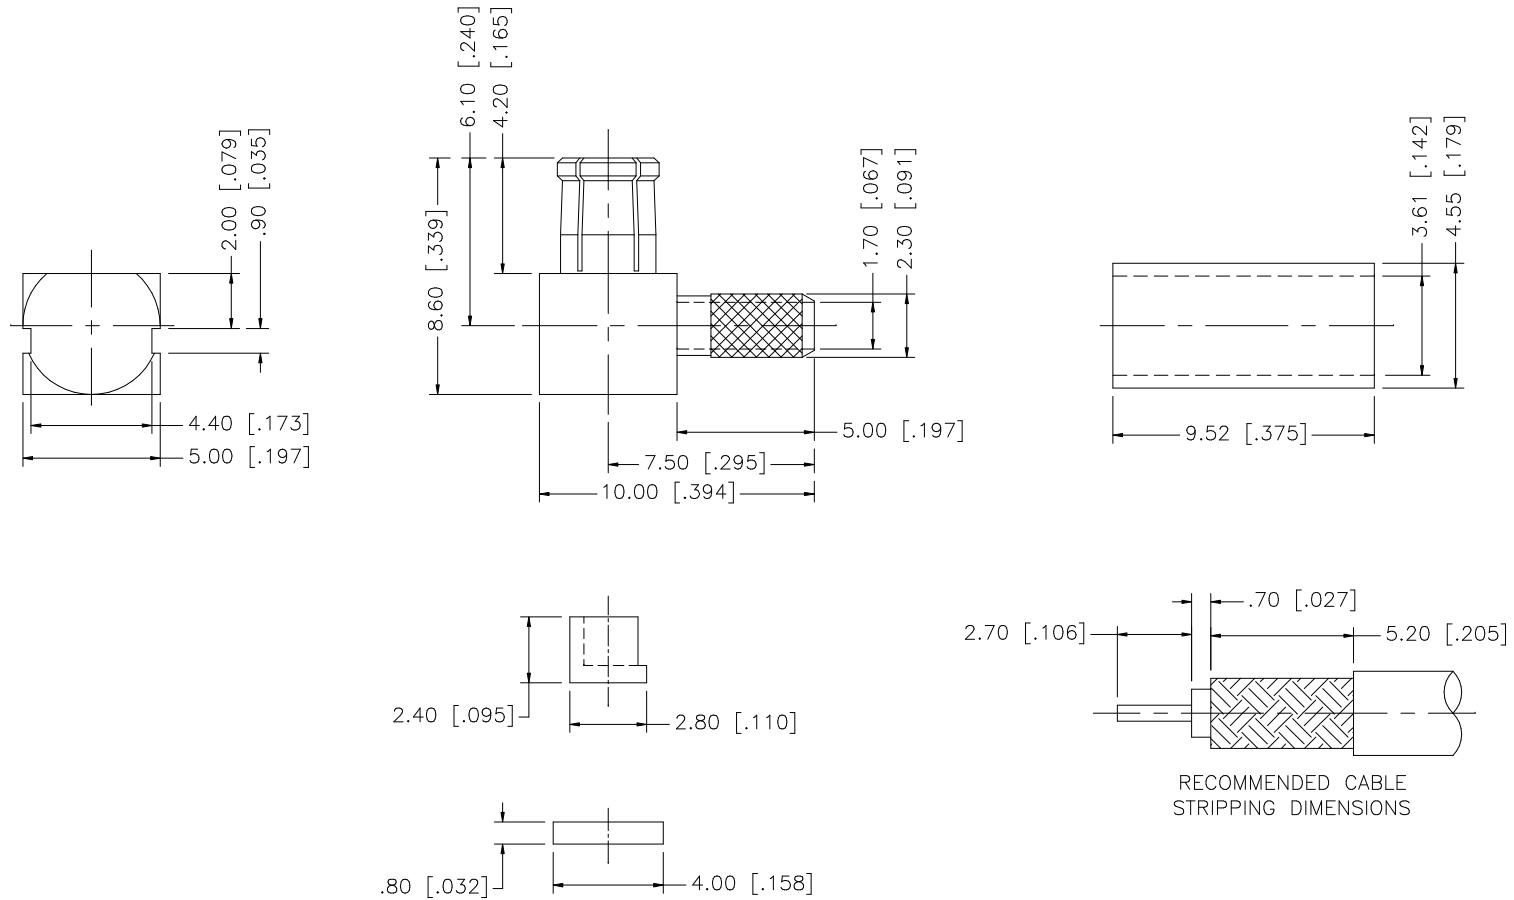

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BER. COPPER	BODY
1	NATURAL	TEFLON	INSULATOR
1	GOLD	BRASS	CONTACT PIN
1	NATURAL	DELTRIN	INSULATOR
1	GOLD	BRASS	COVER
1	GOLD	COPPER	FERRULE
8			

APPROVALS	DATE	PART DESCRIPTION			
DRAWN G.R.S.	05/01/04	MCX R/A CRIMP PLUG (FOR RG-316U/D)			
CHECKED		PART NO. 252119			
ISSUED		DWG. NO. 252119.DWG			
SHEET 1 OF 1		REV. B	SIZE A	SCALE NA	
CAD FILE C:/252/252119.DWG		DO NOT SCALE DRAWING			

Amphenol Connex

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[252119](#)