

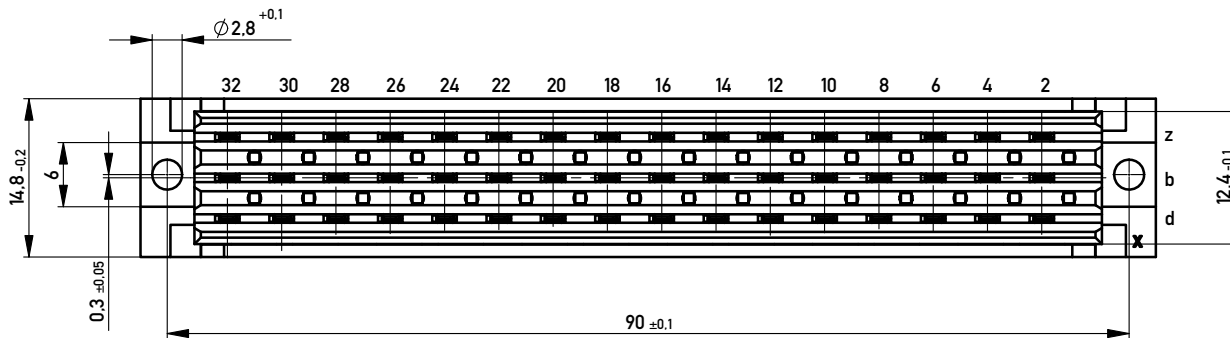

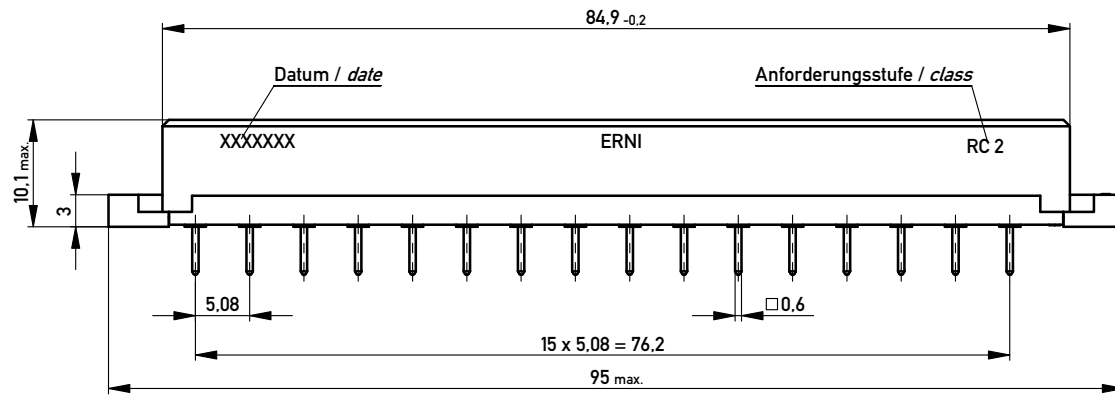


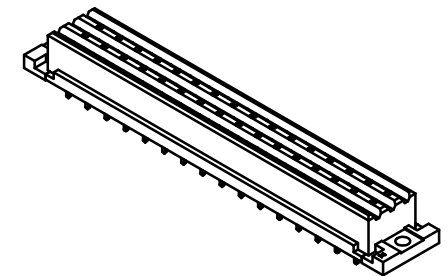

Lötanschluss 0.6×0.6 / solder terminal 0.6×0.6
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Bauart 7 / type 7

Leiterplatten-Layout Vorschlag PCB-Layout Proposal

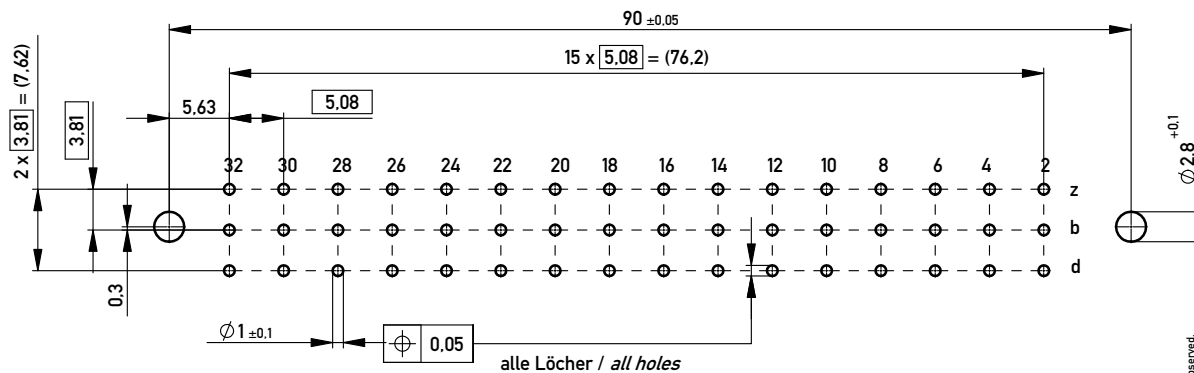

Fehlende Masse und Angaben nach DIN EN 60603-2 / Missing information and dimensions according to DIN EN 60603-2
 Sonstige Angaben siehe Fertigungsunterlagen / Additional indications please see the production documentation

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 9006 to be observed.

Proprietary notice pursuant to ISO 90016 to be observed.

Information:

Tolerances



All Dimensions
in mm

Scale

2:1

All rights reserved.
Only for Information.
To ensure that this is the latest
version of this drawing, please
contact one of the ERNI companies
before using.

Subject to modification without
prior notice.
Drawing will not be updated.



www.ERNI.com

Designation

Federleiste F48 flach Löt

Fem.Connector F48 flat Solder

a

07.08.2013

Index

Date

354741

I

A3

Class

STVF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354741](#)