
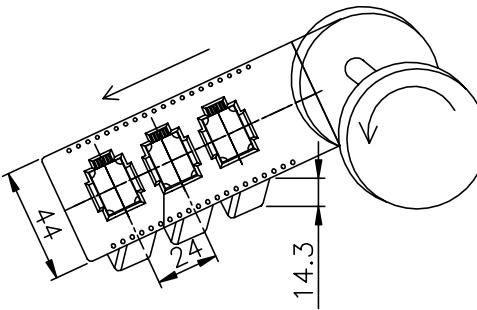
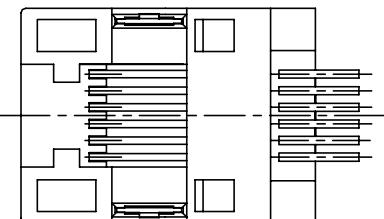
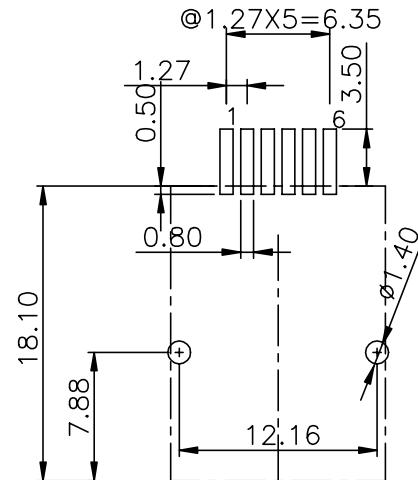
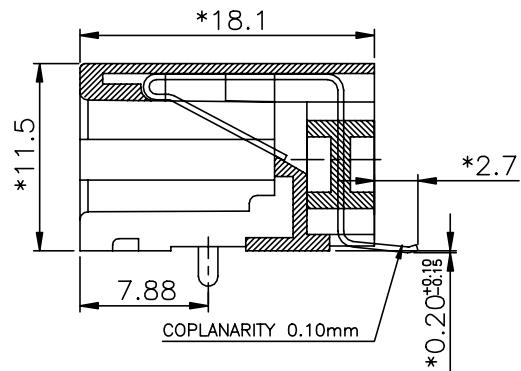


REV	ECO	DESCRIPTION	DRFT	CHKD
△		DRAWING CHANGE	SKYCHEN 07/28/06	

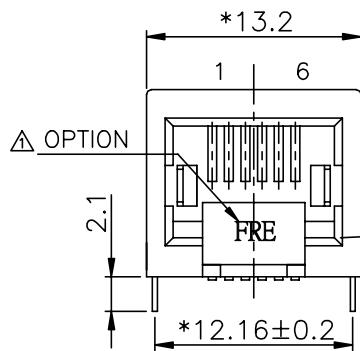

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON+GF30% UL94V-0. COLOR:BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
- △ 3. IR REFLOW PEAK SOLDERING TEMPERATURE: 255°C TO 265°C 5~10 SECONDS.
- △ 4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

△ RoHS PART NUMBER: E536X-FX05YX-L

6--6C	1- 3U"	2- 6U"
4--4C	3- 15U"	4- 30U"
	5- 50U"	
V- W/ FRE LOGO		
Q- W/O LOGO		

MM (INCH)		DF/TQ ANKUE	DATE 04/21/05'	
CHKD	ANKUE	DATE 2006/7/28		
MFO		APPVLLUSHENG	DATE 2006/7/28	
TOLERANCES EXCEPT AS NOTED			MATERIAL :	
.0 ± 0.2	±			
.00 ± 0.15	±			
.000 ± 0.075	±			
ANGLES ± 0.5		QT'Y :		
		FINISH :		
THIRD ANGLE PROJECTION		SCALE : 3:1		
DO NOT SCALE DRAWING			SHEET 1 OF 1	
			REV 1	



RoHS Compliant

FULL RISE ELECTRONIC CO., LTD

TITLE SIDE ENTRY PCB JACK(SMT) 6P

DRAWING NO. GE533069-LA	SIZE A3	REV 1
/PART NO. SEE NOTE		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[E5366-FV05Y4-L](#)