


## Model 72936

### 2mm Sheathed Banana Plug to 4mm Sheathed Banana Plug

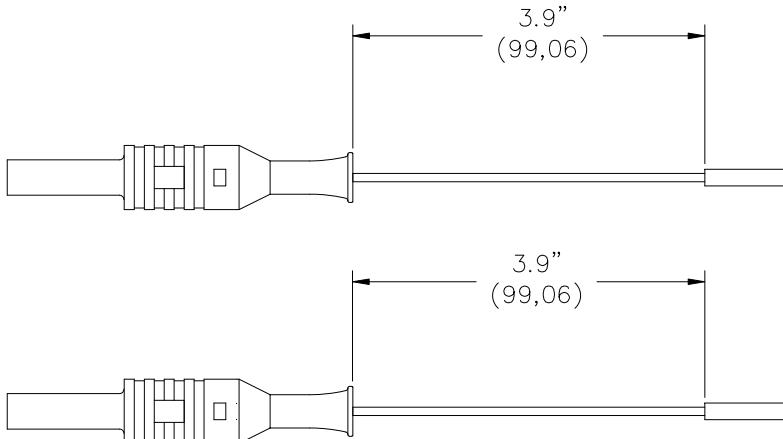

## Features

- Provides a quick and easy configuration between a 4mm sheathed banana jack to a 2mm sheathed banana jack.

## Materials

### 2mm/4mm Banana Plugs:

*Body:* Nickel Plated Brass

*Spring:* Nickel Plated Beryllium Copper

Plug Insulation: Polypropylene, color per part number

Wire Insulation: PVC, color per part number

## Ratings

- |                        |  |
|------------------------|--|
| Operating Voltage:     | For CE Compliance and for personal safety, do not hold in hand when voltages exceed 33 Vac/70 Vdc. |
| Operating Temperature: | Do not use on circuits where transient stresses can exceed the rated voltage.                      |
| Operating Current:     | -20°C to +80°C (-4°F to +176°F) Max.   |
|                        | 2 Amperes Max.   |

## Ordering Information

Model: 72936-XX-\*

XX = Standard Length: 39 (3.9in) (10cm)

\* = Standard Color: -0 Black, -2 Red

Ordering Example: 72936-39-2, Test Lead is 3.9in and Red.

**USA:** Sales: 800-490-2361

Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): xx =  $\pm .02"$  (.51 mm), .xxx =  $\pm .005"$  (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

72936-39-0 72936-39-2