

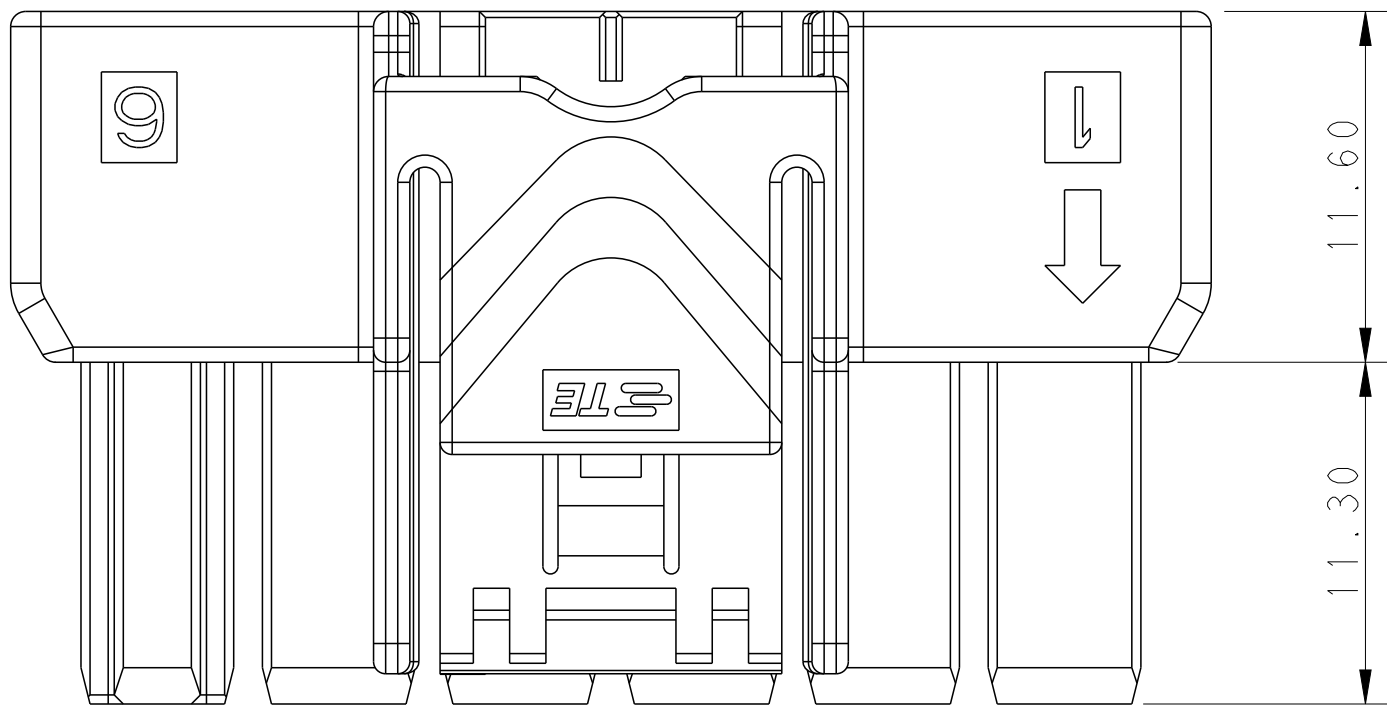
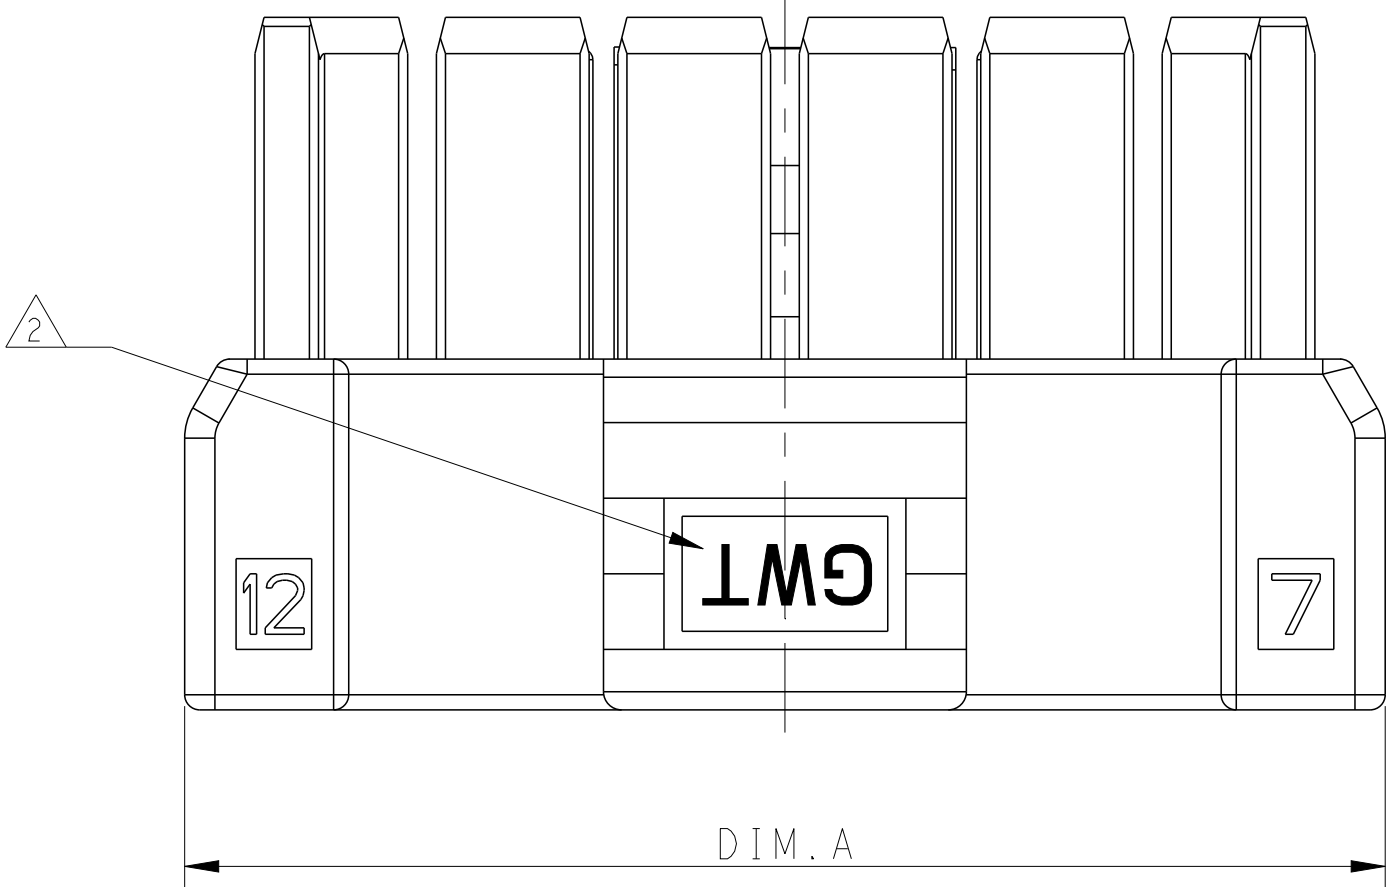
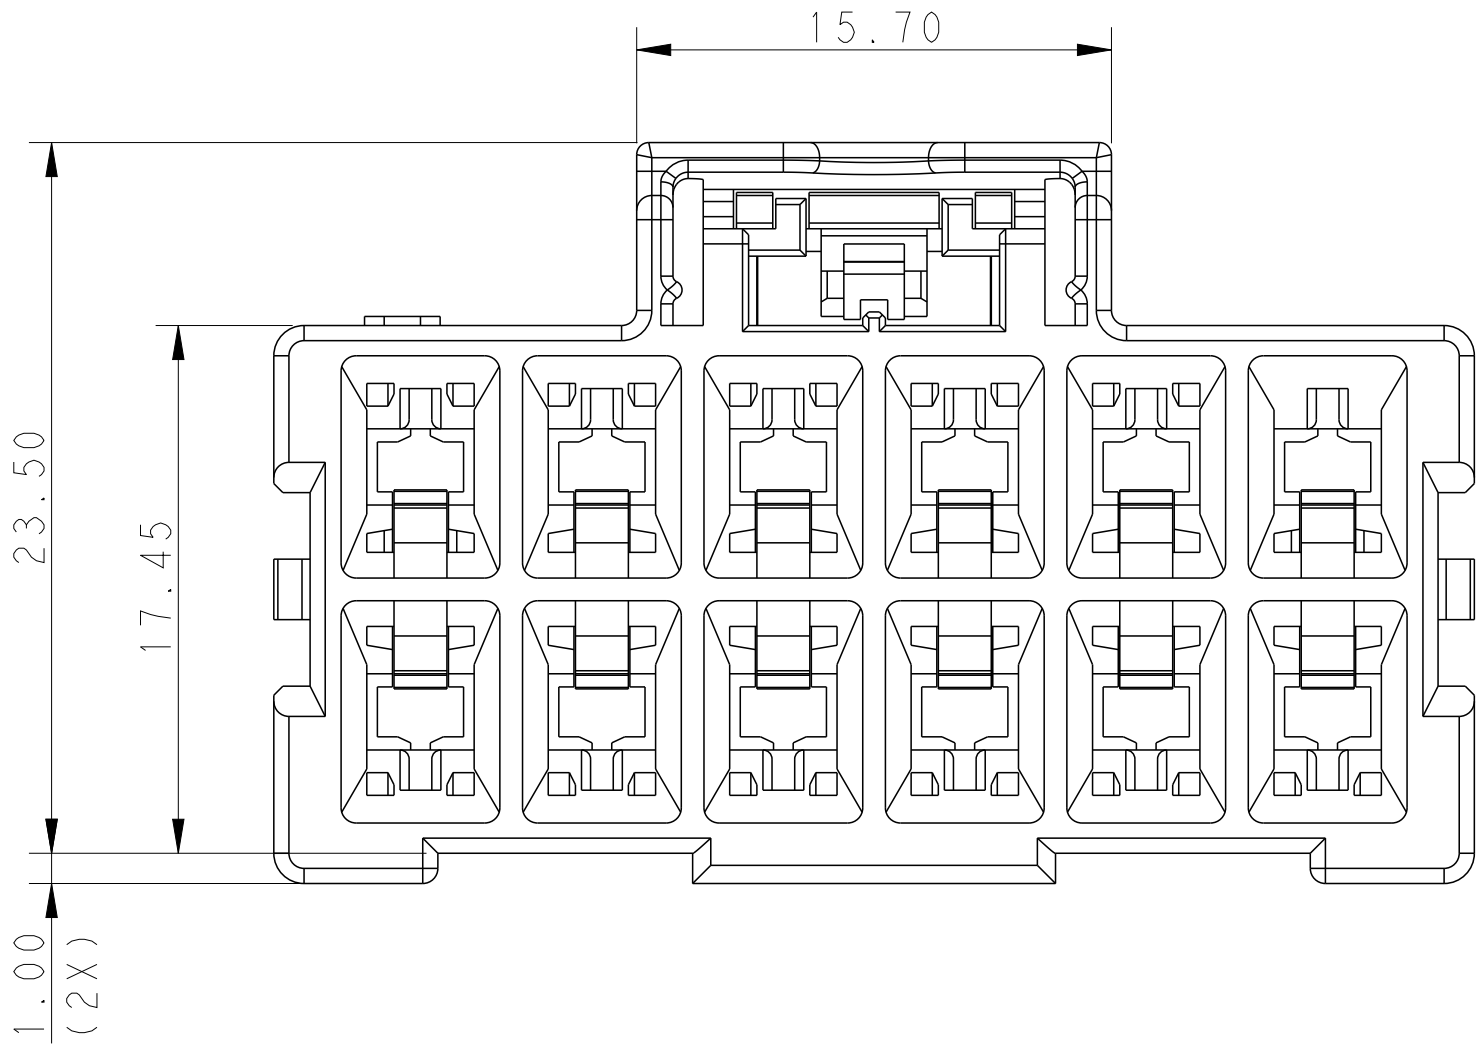


LOC		DIST		REVISONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
		B			22JUL2016	BW	GJ

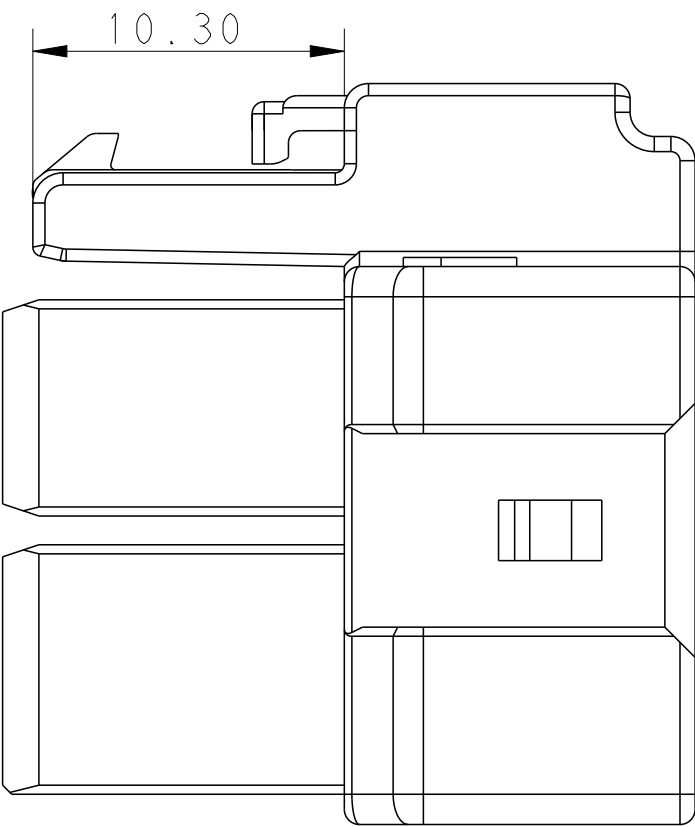

POS.	DIM.A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

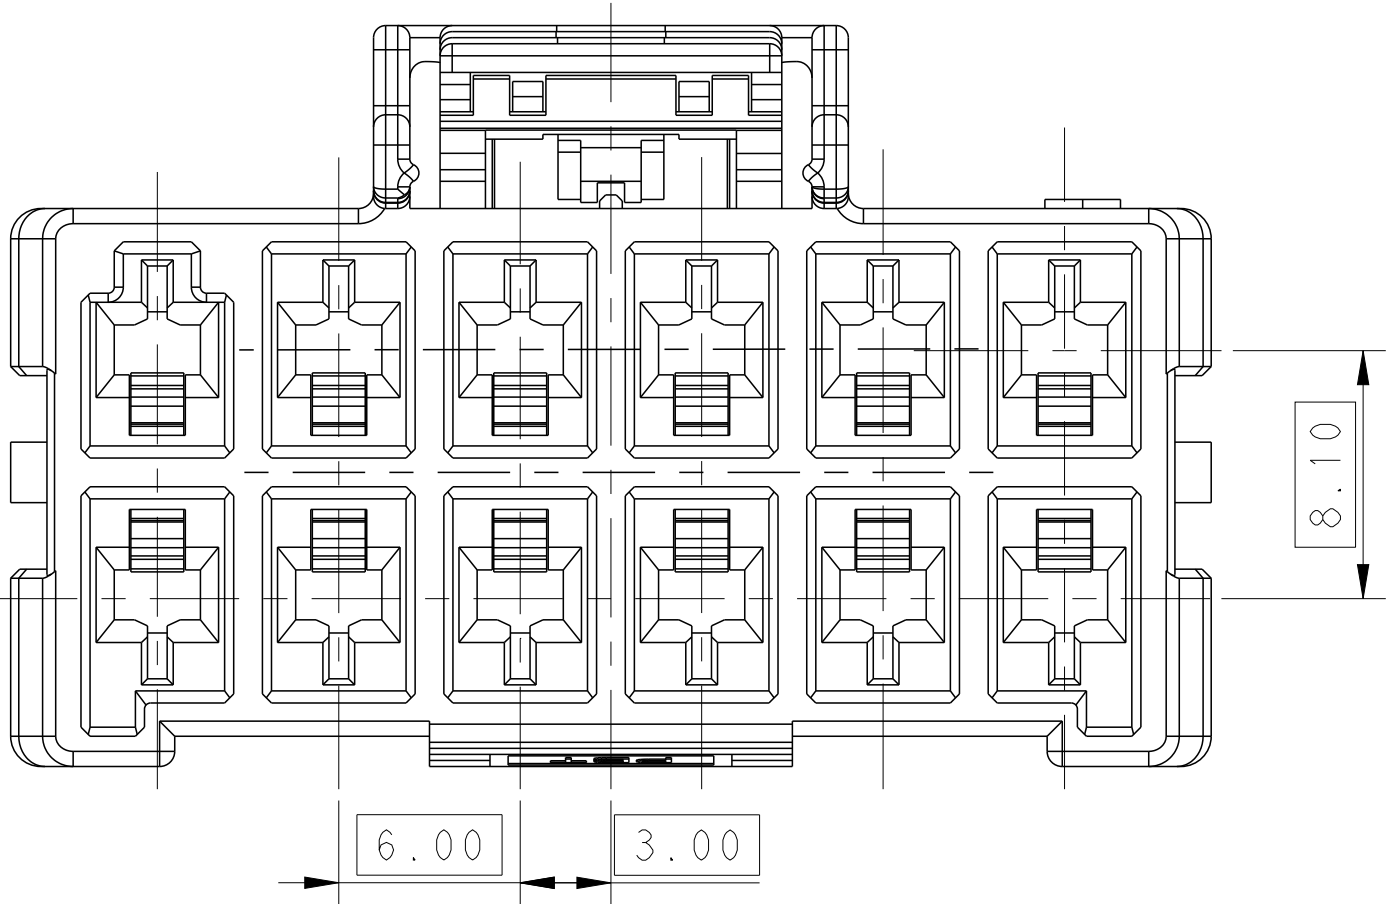

NOTE

1. MATERIAL:
- LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
- LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:
- LEVEL A:GWT,LEVEL B:HWT


3. APPLICABLE CONTACT P/N
- RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*

4. MATING CONN, P/N
- CAP HSG: *-2232359/264-*
- TPA: *-1971778-*


5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE WU		26MAR2013			
DIMENSIONS:		APVD	YUHONG MAO		26MAR2013		NAME PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:						
		0 PLC ±					PRODUCT SPEC 108-106118	
		1 PLC ±0.35						
		2 PLC ±0.25						
		3 PLC ±						
		4 PLC ±						
		ANGLES ±					APPLICATION SPEC 114-106118	
		FINISH ±						
MATERIAL		-					SIZE A1	
		-						
		-					CAGE CODE 00779	
		-						
Customer Drawing					DRAWING NO 2232266		RESTRICTED TO -	
					SCALE		SHEET 1 OF 2	
							REV B	


LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

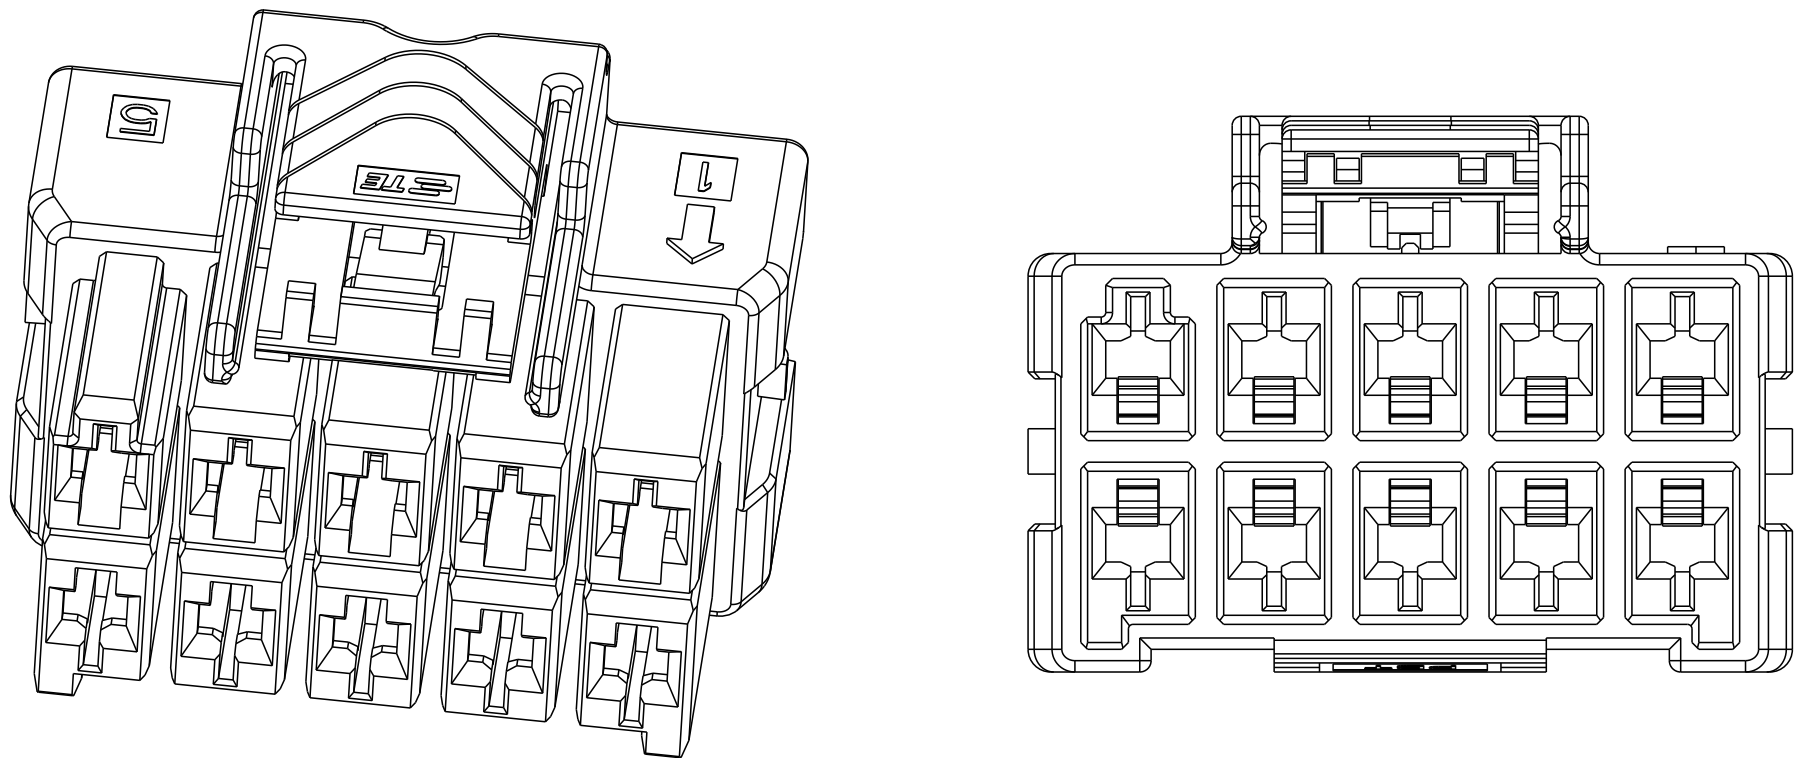


2*5 POSITIONS

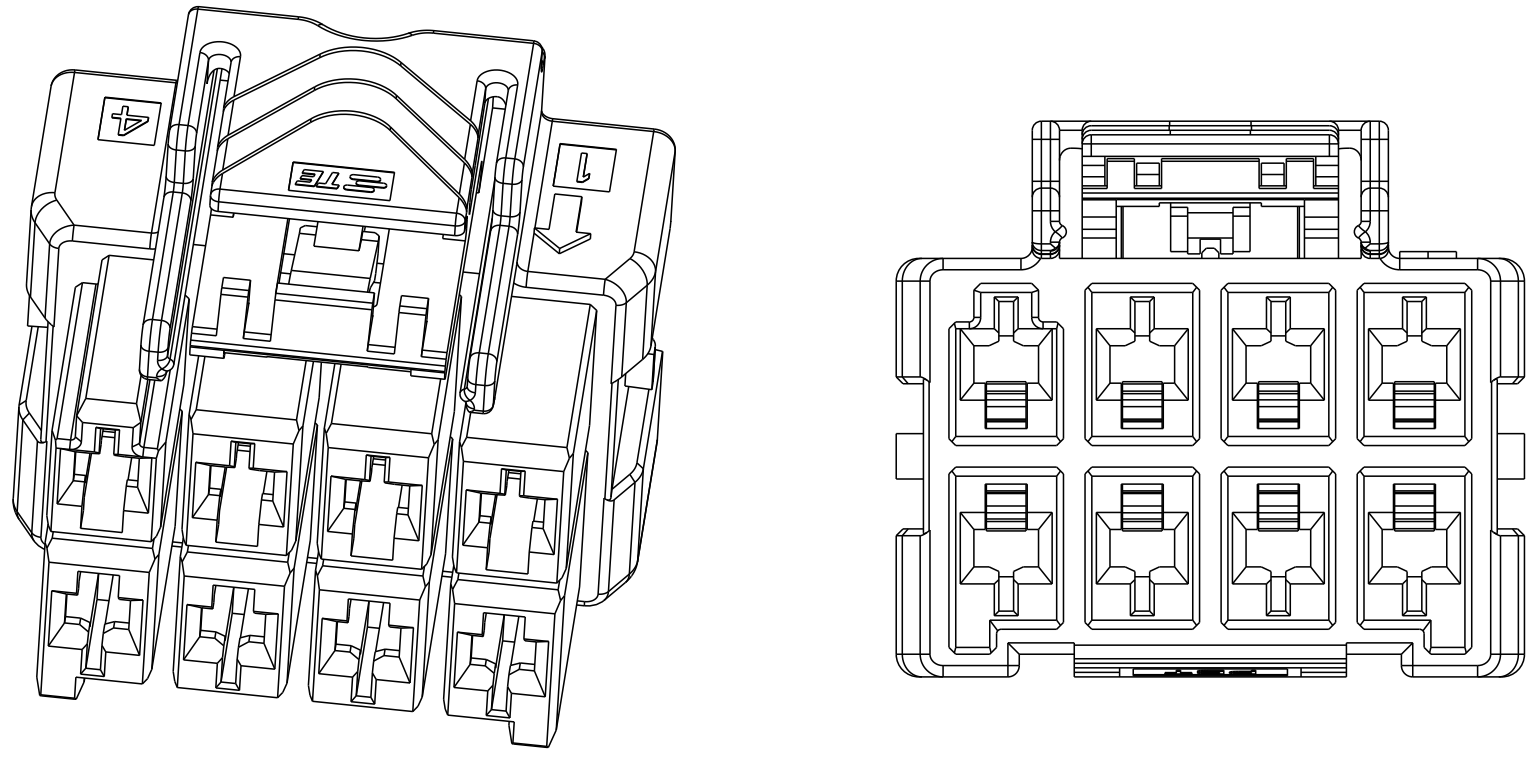


2*4 POSITIONS

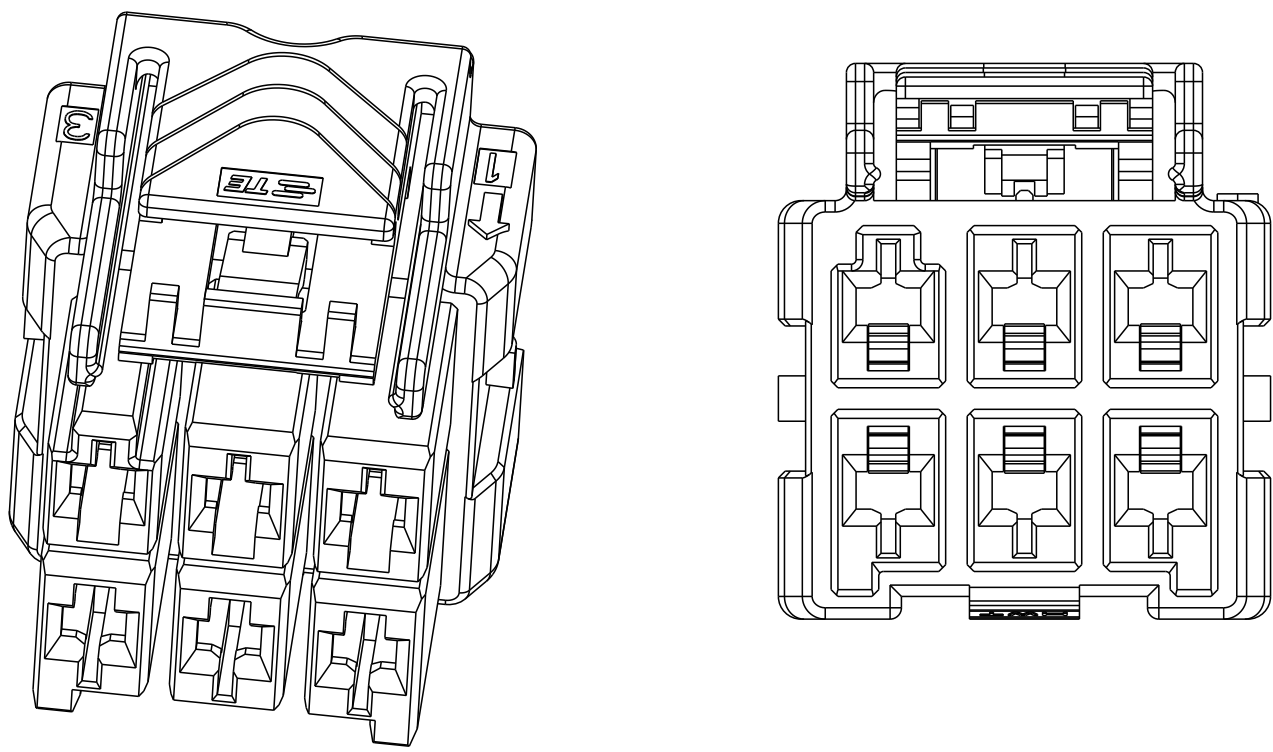


2*3 POSITIONS

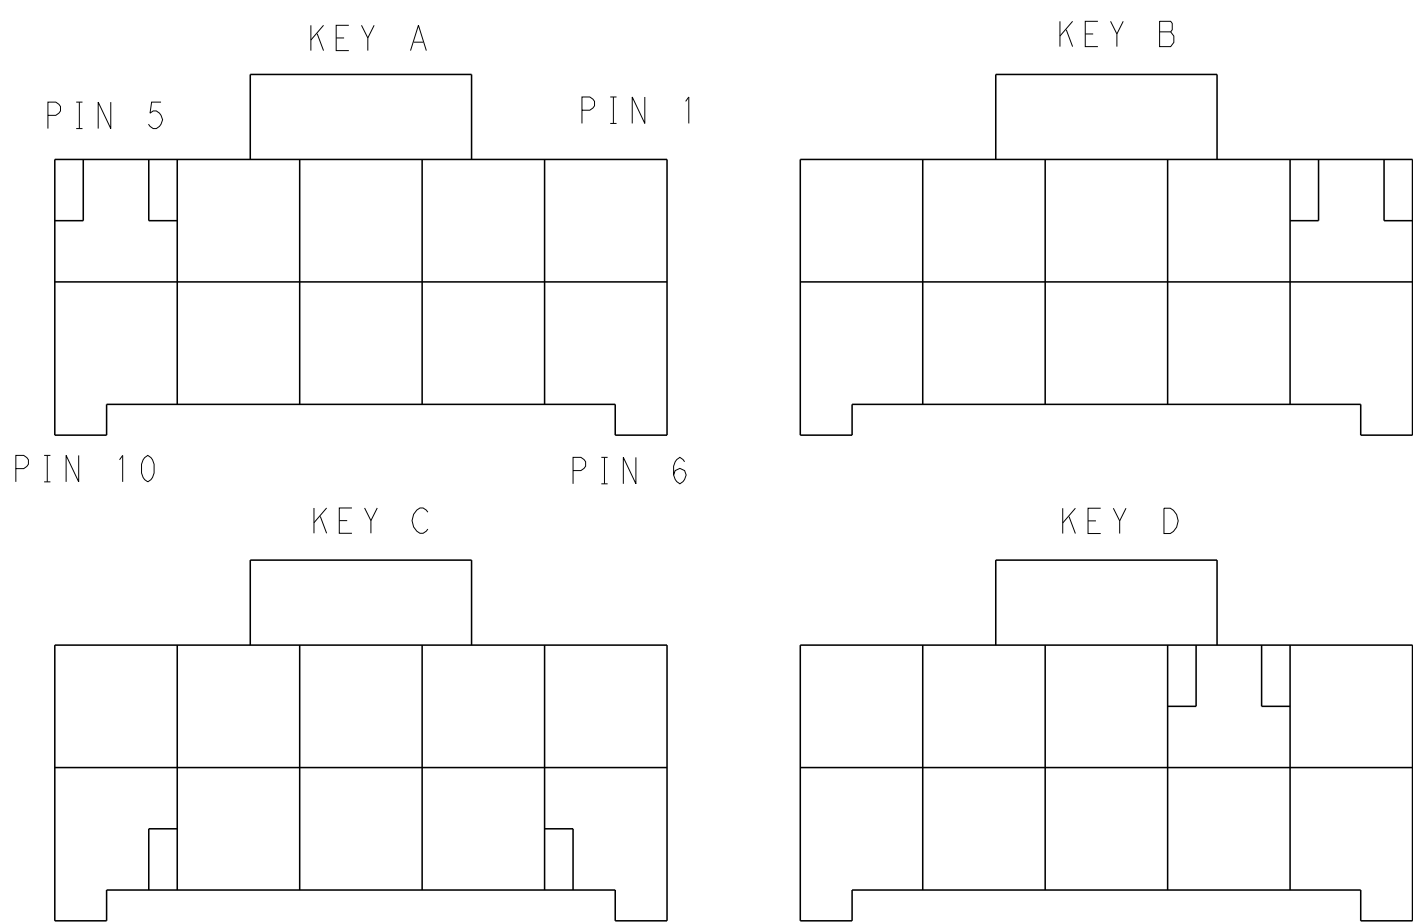


KEYING FOR 2*5 POS.

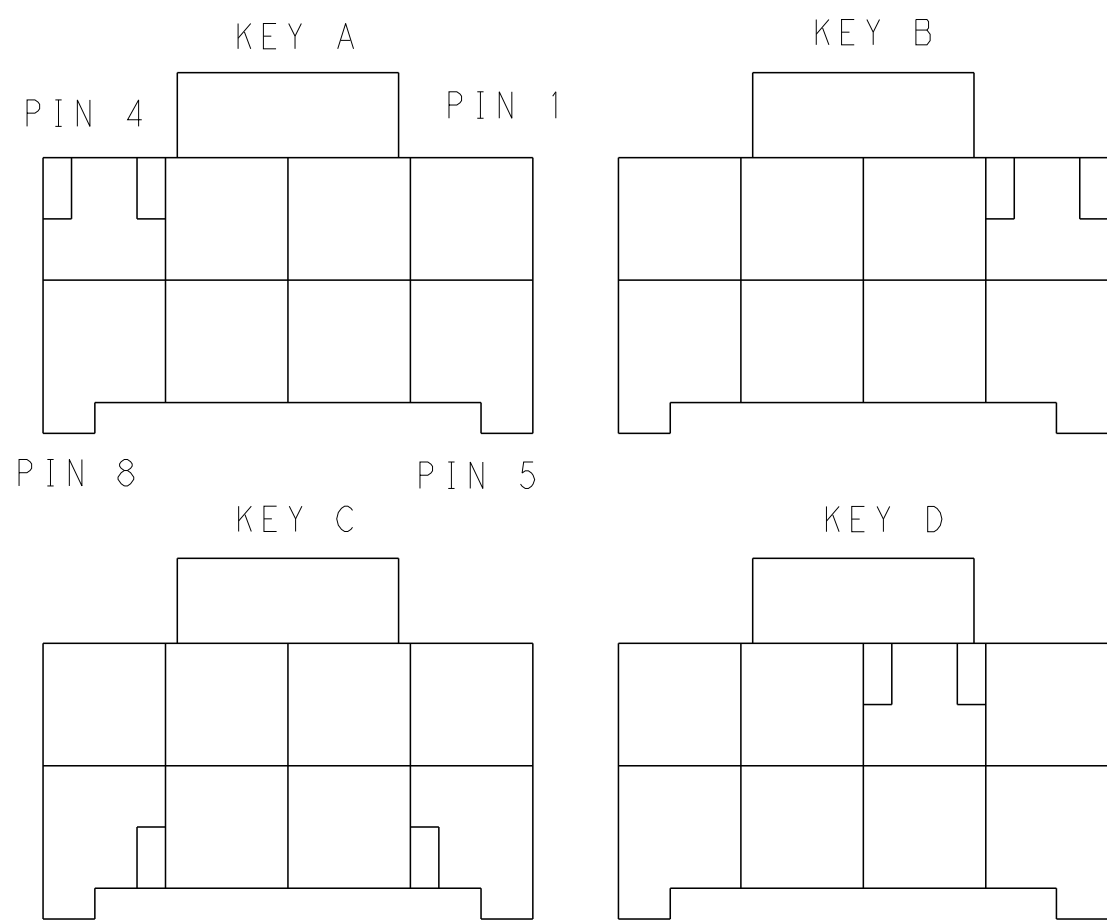


KEYING FOR 2*4 POS.

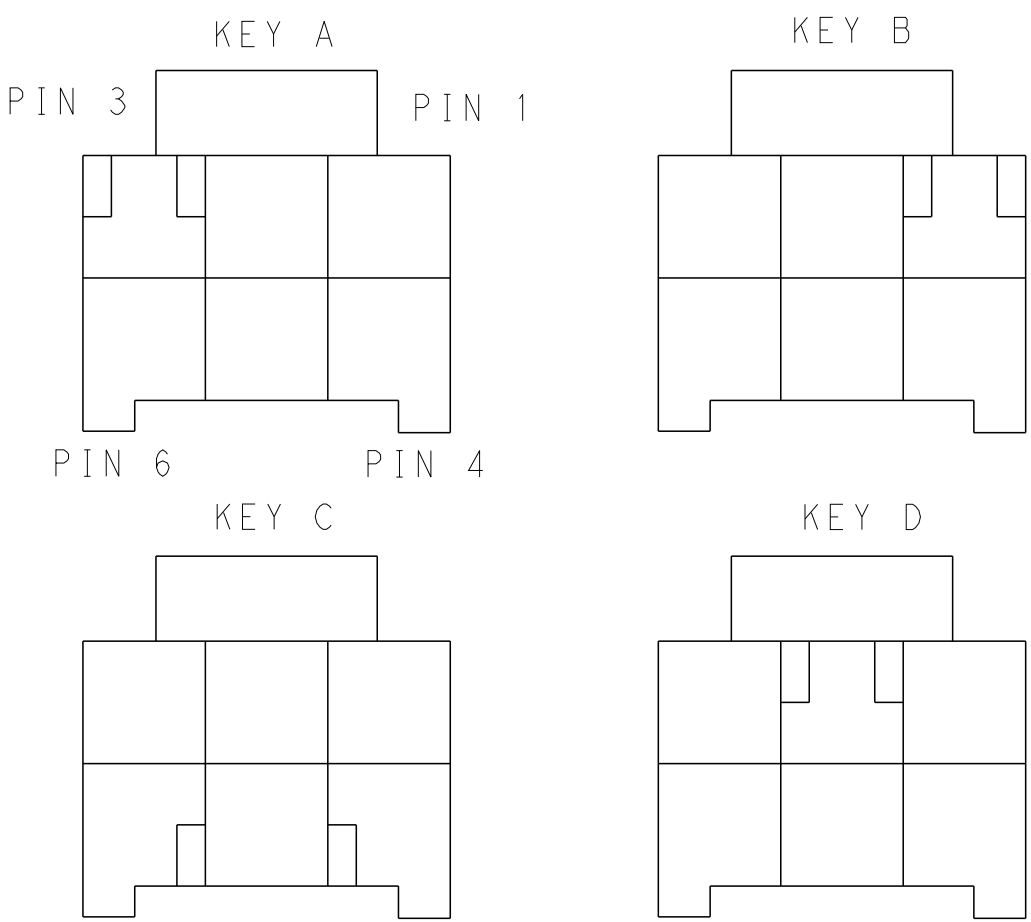

KEYING FOR 2*3 POS.

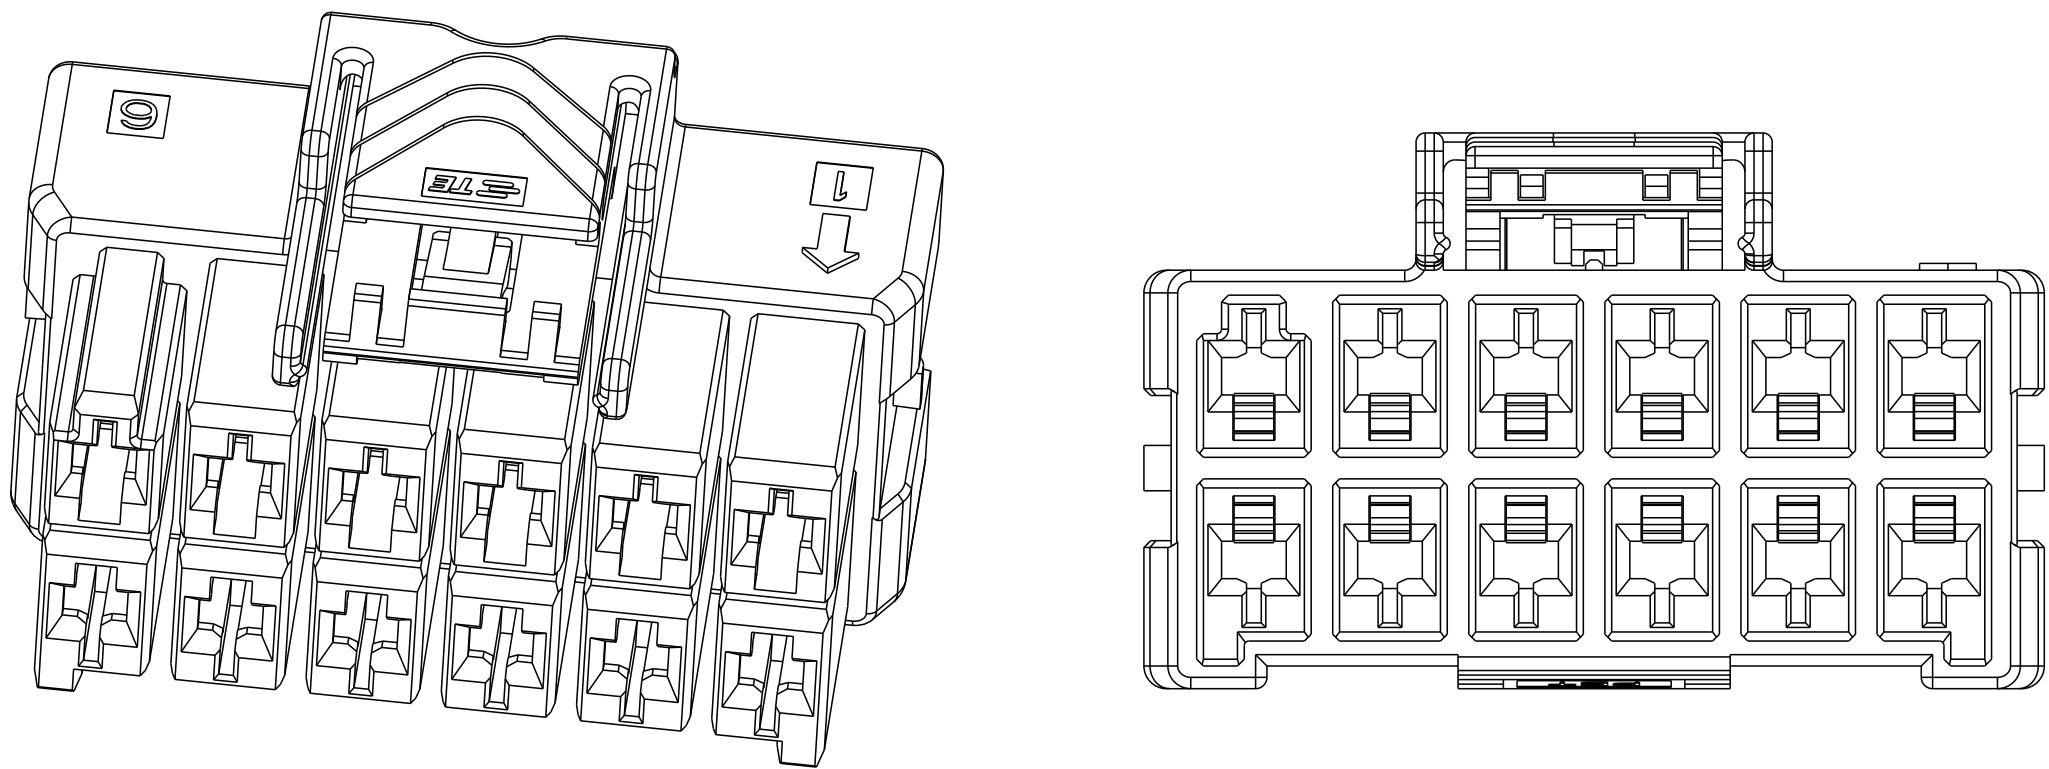

2*6 POSITIONS

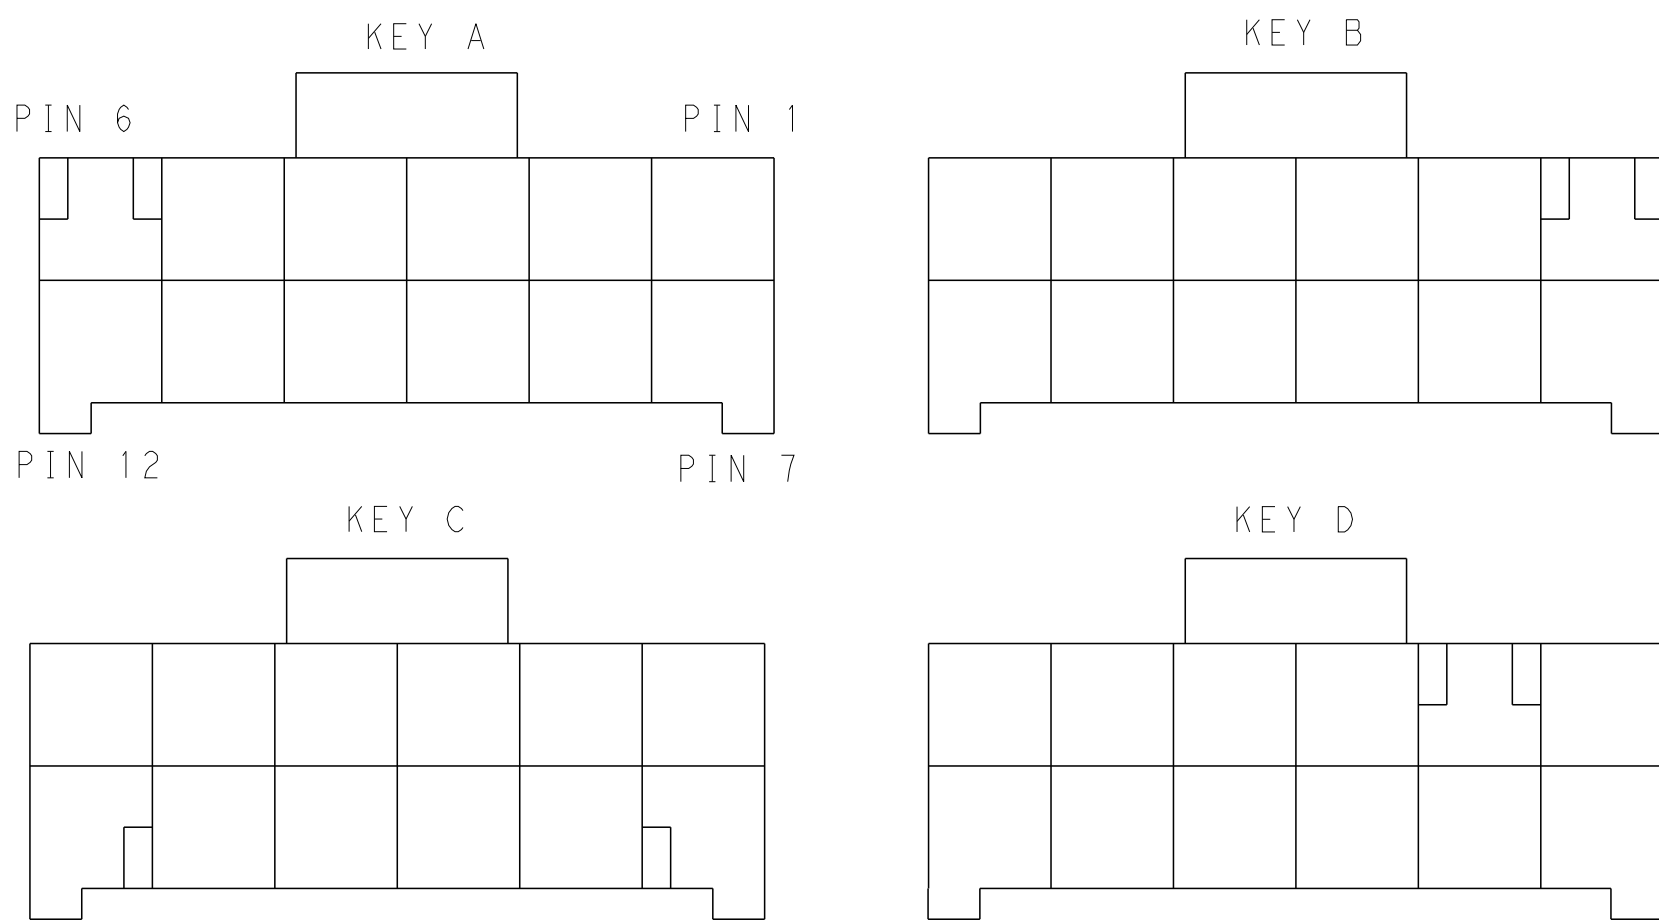

KEYING FOR 2*6 POS.

2*6	LEVEL A	DARK GREY	KEY A	5-2232266-6
		BROWN	KEY B	6-2232266-6
		GREEN	KEY C	7-2232266-6
		ORANGE	KEY D	8-2232266-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232266-5
		BROWN	KEY B	6-2232266-5
		GREEN	KEY C	7-2232266-5
		ORANGE	KEY D	8-2232266-5
POS.	MATERIAL	COLOR	KEY	P/N

2*4	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-4
		GREEN	KEY C	7-2232266-4
		ORANGE	KEY D	8-2232266-4
2*3	LEVEL A	DARK GREY	KEY A	5-2232266-3
		BROWN	KEY B	6-2232266-3
		GREEN	KEY C	7-2232266-3
		ORANGE	KEY D	8-2232266-3
	LEVEL B	BLACK	KEY A	1-2232266-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN TOMMY_WU 26MAR2013
CHK HAPYE_WU 26MAR2013
APVD YUIHONG_MAO 26MAR2013

DIMENSIONS:

mm

0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT

MATERIAL

-

Customer Drawing

SCALE

SHEET 2 OF 2

REV B

TE Connectivity

NAME

PLUG HOUSING,DOUBLE ROW
POWER TRIPLE LOCK

SIZE CAGE CODE DRAWING NO
A100779C=2232266

RESTRICTED TO

-

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-2232266-4](#)