


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

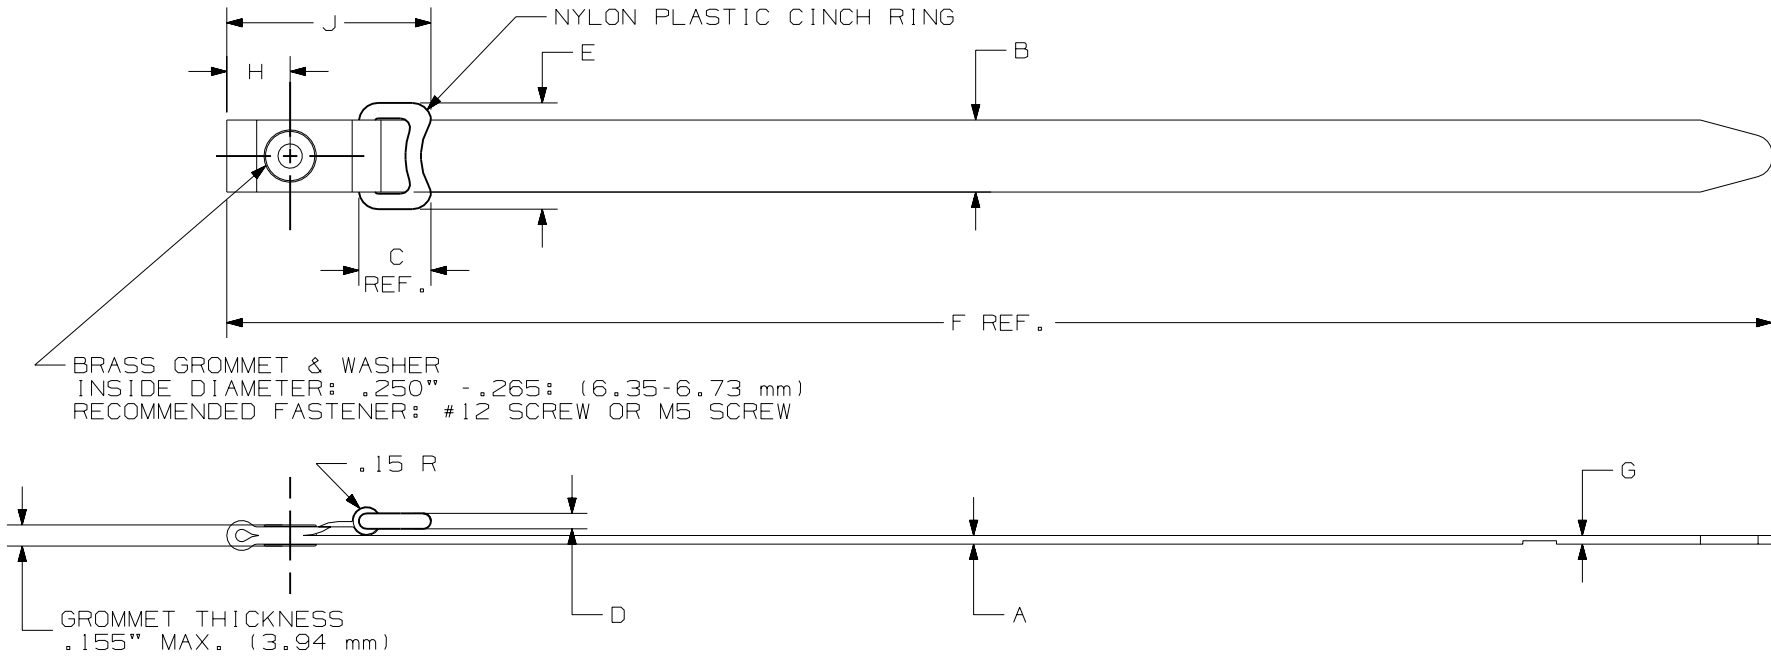

BRASS GROMMET & WASHER
INSIDE DIAMETER: .250" - .265; (6.35-6.73 mm)
RECOMMENDED FASTENER: #12 SCREW OR M5 SCREW

GROMMET THICKNESS
.155" MAX. (3.94 mm)

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	J in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PARTS (g)
	MIN. in (mm)	MAX. in (mm)												
GCTE2S	1.7 (43.5)	2.2 (55.8)	.100 (2.5)	.75 (19.1)	.750 (19.1)	.156 (4.0)	1.10 (27.9)	10.5 (267)	.100 (2.5)	.66 (16.8)	2.12 (53.8)	50 (222)	STANDARD	.93 (421)
GCTE4S	2.7 (68.5)	4.1 (104.1)	.100 (2.5)	.75 (19.1)	.750 (19.1)	.156 (4.0)	1.10 (27.9)	16.5 (419)	.100 (2.5)	.66 (16.8)	2.12 (53.8)	50 (222)	STANDARD	1.12 (506)

NOTES:

- 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
- 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS.

SS_27341_00.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES
GROMMET CINCH TIE END MOUNT

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .25 (.XXX) ± .030
(.XX) ± .125 ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
JABO

MAT'L:

SCALE
NONE

DATE
12/7/01

WOVEN NYLON
HOOK/LOOP
COLOR: BLACK
EXCEPT GROMMET

DRAWING NO.
SS-27341

DWG
A
SIZE

5	4/12/06	FAB		ADDED WEIGHTS TO DRAWING	27341	5								
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[GCTE2S-X0](#)