



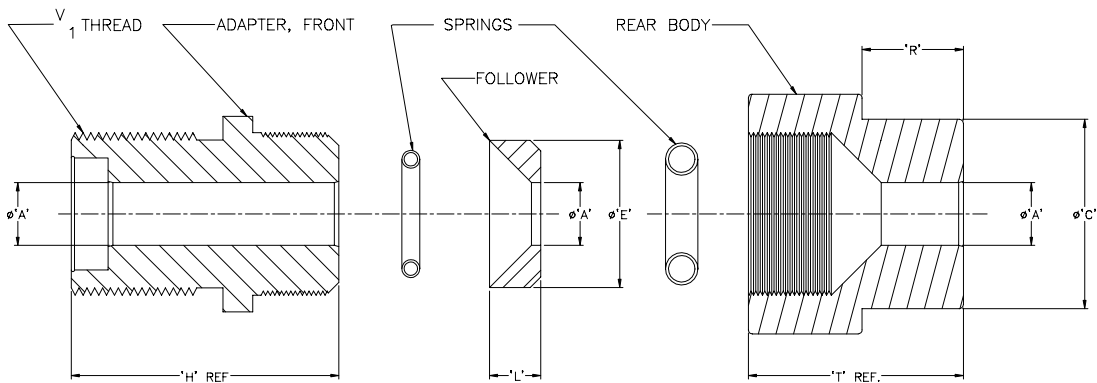

LT	REVISIONS	DATE	APPROVED
1	1	12/12/97	GMR
NC RELEASED TO DOCUMENT CONTROL PER DCR #SG87145			



ADAPTER, FRONT			
SIZE	'A' DIA +0.015 -0.000	'H' REF	V 1 THREAD-MALE
A-SM	.312	1.84	7/8-12UN-2A
A	.406	1.56	7/8-12UN-2A
B	.515	1.56	1.0-12UNF-2A
C	.640	1.56	1 1/8-12UNF-2A
D	.750	1.91	1 1/4-12UNF-2A
E	.812	1.91	1 1/4-12UNF-2A
F	.843	1.91	1 5/16-12UN-2A
G	.853	2.03	1 1/2-12UNF-2A
J	1.062	2.03	1 5/8-12UN-2A
K	1.172	2.34	1 3/4-12UN-2A
L	1.265	2.34	1 13/16-12UN-2A
M	1.406	2.34	2-12UN-2A
N	1.515	2.34	2 1/16-12UNS-2A
P	1.625	2.34	2 3/16-12UNS-2A
R	1.750	2.56	2 5/16-12UNS-2A
S	1.875	3.19	2 11/16-12UNS-2A
T	2.062	3.19	2 7/8-12UNS-2A
V	2.167	3.19	3.00-12UNS-2A
W	2.312	3.19	3 1/8-12UNS-2A

FOLLOWER			
SIZE	'A' DIA +0.015 -0.000	'E' DIA +0.005 -0.000	'L' REF
A-SM	.312	.800	.375
A	.406	.800	.250
B	.515	.870	.250
C	.640	.990	.250
D	.750	1.280	.375
E	.812	1.343	.375
F	.843	1.406	.375
G	.853	1.531	.375
J	1.062	1.593	.375
K	1.172	1.718	.375
L	1.265	1.843	.375
M	1.406	1.988	.375
N	1.515	2.093	.375
P	1.625	2.156	.375
R	1.750	2.406	.437
S	1.875	2.593	.437
T	2.062	2.740	.437
V	2.167	2.906	.437
W	2.312	2.990	.437

REAR BODY				
SIZE	'A' DIA +0.015 -0.000	'C' DIA	'R' REF	'T' REF
A-SM	.312	1.100	.550	1.64
A	.406	1.100	.550	1.40
B	.515	1.100	.550	1.40
C	.640	1.100	.550	1.40
D	.750	1.512	.796	1.89
E	.812	1.512	.796	1.89
F	.843	1.512	.796	1.89
G	.853	1.512	.796	1.89
J	1.062	1.512	.796	1.89
K	1.172	2.210	1.093	2.20
L	1.265	2.210	1.093	2.20
M	1.406	2.210	1.093	2.20
N	1.515	2.210	1.093	2.20
P	1.625	3.572	1.625	2.72
R	1.750	3.572	1.625	2.76
S	1.875	3.572	1.625	2.76
T	2.062	3.572	1.625	2.76
V	2.167	3.572	1.625	2.76
W	2.312	3.572	1.625	2.76

SPRINGS		
SPRING SIZE	'ID' REF	'OD' REF
A-SM	.312	.780
A	.437	.780
B	.546	.890
C	.656	1.000
D	.781	1.310
E	.843	1.375
F	.875	1.405
G	.984	1.515
J	1.093	1.625
K	1.203	1.735
L	1.297	1.830
M	1.437	1.970
N	1.546	2.075
P	1.655	2.185
R	1.781	2.440
S	1.906	2.565
T	2.093	2.755
V	2.218	2.880
W	2.343	3.000

NOTES:

- CABLE SHIELD GROUNDING ADAPTERS PROVIDE 360° GROUNDING TO OVERALL SHIELDED CABLES. THESE ARE FOR USED AT THE ENTRANCE TO STUFFING TUBES AND ARE AVAILABLE IN A VARIETY OF SIZES TO FIT VARIOUS THREADED ASSEMBLIES.

If this document is printed it becomes uncontrolled.
Check for the latest revision.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: DEC .XXX±.030 DEC .XX±.06 ANGLE ±2°		DATE 87Dec8 DESIGNED C.ROSITANO CHECKED W.C. GAY MATERIAL CSO ASCDI FINISH PROJECT POL	DATE 87Dec8 THIRD ANGLE PROJECTION TITLE CABLE SHIELD GROUNDING ADAPTER WITH MALE THREADS SIZE D 06090 SCALE NONE	REV INC SHEET 1 OF 1
--	--	--	--	-------------------------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[CSGA-K](#)