

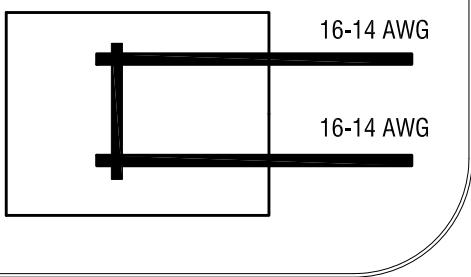


SCHEMATIC

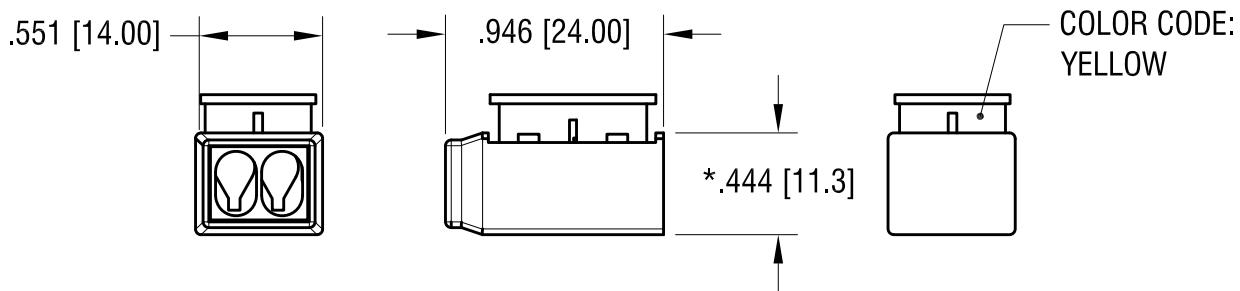

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE:



NOTE:

1. 2 PIN ONE WAY SERIES
2. INSULATION: MAT'L- POLYCARBONATE, LEXAN UL 94V-0
3. CONTACT: MAT'L- COPPER ALLOY
FINISH- TIN PLATE, OVER NICKEL PLATE
4. FOR WIRE: SOLID WIRE
WIRE SIZE: 16 AWG MIN. - 14 AWG MAX.
5. RATED VOLTAGE 300V
RATED CURRENT: 20 A
6. UL LISTED: E490623

* HEIGHT OF CLOSED CONNECTOR

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

ONE WAY SERIES WIRE CONNECTOR

MATERIAL

AS NOTED

FINISH	AS NOTED		DRN BY	DATE
TOLERANCES	INCH	[MM]	NT	1.06.17
DECIMAL	$\pm .010$	$[\pm 0.25]$	APP'D	SCALE 1.2X
ANGULAR	$\pm 1^\circ$		CODE	DWG NO.
	UNLESS OTHERWISE SPECIFIED		C	8370

DATE DESCRIPTION REV.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[8370](#)