


Matched Pair, Molded, Automotive, Thin Film, SOT-23, Resistor, Surface Mount Network, AEC-Q200 Qualified



Vishay Thin Film MPMA Series dividers provide ± 2 ppm/ $^{\circ}$ C tracking and a ratio tolerance as tight as ± 0.05 %, small size, and exceptional stability for all surface mount applications. The standard SOT-23 package format with unity and common standard resistance divider ratios provide easy selection for most applications requiring matched pair resistor elements. MPMA is AEC-Q200 qualified and ideal for high precision automotive applications. The ratios listed are available for off the shelf delivery. If you require a non-standard ratio, consult the applications engineering group as we may be able to meet your requirements.

SCHEMATIC



FEATURES

- AEC-Q200 qualified
- Resistance range 250 Ω to 50 k Ω
- Excellent long term ratio stability ± 0.03 % over 1000 h, 125 $^{\circ}$ C
- Ratio tolerances to ± 0.05 %
- Tracking as low as ± 2 ppm/ $^{\circ}$ C
- Very low noise and voltage coefficient (< -30 dB, 0.1 ppm/V)
- Standard JEDEC[®] TO-236 package variation AB
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

STANDARD DIVIDER RATIO (R_2/R_1)

| RATIO | R_2 (Ω) | R_1 (Ω) | TCR TRACKING |
|-------|--------------------|--------------------|----------------------|
| 50:1 | 50K | 1K | 10 ppm/ $^{\circ}$ C |
| 25:1 | 25K | 1K | 5 ppm/ $^{\circ}$ C |
| 20:1 | 20K | 1K | |
| 10:1 | 10K | 1K | |
| 9:1 | 9K | 1K | |
| 6:1 | 6K | 1K | |
| 5:1 | 10K | 2K | 3 ppm/ $^{\circ}$ C |
| 5:1 | 5K | 1K | |
| 4:1 | 8K | 2K | |
| 4:1 | 4K | 1K | |
| 2:1 | 10K | 5K | |
| 2:1 | 2K | 1K | 2 ppm/ $^{\circ}$ C |
| 1:1 | 50K | 50K | |
| 1:1 | 25K | 25K | |
| 1:1 | 10K | 10K | |
| 1:1 | 5K | 5K | |
| 1:1 | 2.5K | 2.5K | |
| 1:1 | 1K | 1K | |
| 1:1 | 500 | 500 | |
| 1:1 | 250 | 250 | |


STANDARD ELECTRICAL SPECIFICATIONS

| TEST | SPECIFICATIONS | CONDITIONS |
|--------------------------------|--|---------------------------------------|
| Material | Ta2N | - |
| Pin/Lead Number | 3 | - |
| Resistance Range | 250 Ω to 50 k Ω per resistor | - |
| TCR: Absolute | ± 25 ppm/ $^{\circ}$ C | -55 $^{\circ}$ C to +125 $^{\circ}$ C |
| TCR: Tracking | Down to ± 2 ppm/ $^{\circ}$ C | -55 $^{\circ}$ C to +125 $^{\circ}$ C |
| Tolerance: Absolute | ± 0.1 % to ± 1.0 % | +25 $^{\circ}$ C |
| Tolerance: Ratio | ± 0.05 % to 0.5 % | +25 $^{\circ}$ C |
| Power Rating: Resistor | 100 mW | Maximum at +70 $^{\circ}$ C |
| Power Rating: Package | 200 mW | Maximum at +70 $^{\circ}$ C |
| Stability: Absolute | < 1 k Ω : ± 0.35 %; > 1 k Ω : ± 0.04 % | 1000 h at +125 $^{\circ}$ C |
| Stability: Ratio | < 1 k Ω : ± 0.35 %; > 1 k Ω : ± 0.03 % | 1000 h at +125 $^{\circ}$ C |
| Voltage Coefficient | 0.1 ppm/V | - |
| Working Voltage | 100 V max. not to exceed $\sqrt{P \times R}$ | - |
| Operating Temperature Range | -55 $^{\circ}$ C to +155 $^{\circ}$ C | - |
| Storage Temperature Range | -55 $^{\circ}$ C to +155 $^{\circ}$ C | - |
| Noise | < -30 dB | - |
| Thermal EMF | 0.2 μ V/ $^{\circ}$ C | - |
| Shelf Life Stability: Absolute | $\Delta R/R \pm 0.01$ % | 1 year at +25 $^{\circ}$ C |
| Shelf Life Stability: Ratio | $\Delta R/R \pm 0.002$ % | 1 year at +25 $^{\circ}$ C |

DIMENSIONS AND IMPRINTING in inches and millimeters

| DIMENSION | INCHES | | MILLIMETERS | |
|-----------|--------|--------|-------------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.031 | 0.040 | 0.79 | 1.02 |
| A1 | 0.001 | 0.004 | 0.02 | 0.10 |
| B | 0.105 | 0.120 | 2.67 | 3.05 |
| S | 0.071 | 0.079 | 1.80 | 2.00 |
| W | 0.015 | 0.021 | 0.38 | 0.54 |
| L | 0.083 | 0.098 | 2.10 | 2.50 |
| H | 0.047 | 0.055 | 1.20 | 1.40 |
| T | 0.005 | 0.010 | 0.13 | 0.25 |
| J | 0.0035 | 0.0059 | 0.089 | 0.15 |
| K | 0.017 | 0.022 | 0.44 | 0.55 |
| Ø | 0 | 8° | 0 | 8° |

| MECHANICAL SPECIFICATIONS | |
|---------------------------|---------------------------------------|
| Resistive Element | Tantalum nitride |
| Substrate Material | Ceramic |
| Body | Molded epoxy |
| Terminals | Copper alloy |
| Lead (Pb)-free Option | Solder free leads, Ni/Pd/Au plated |

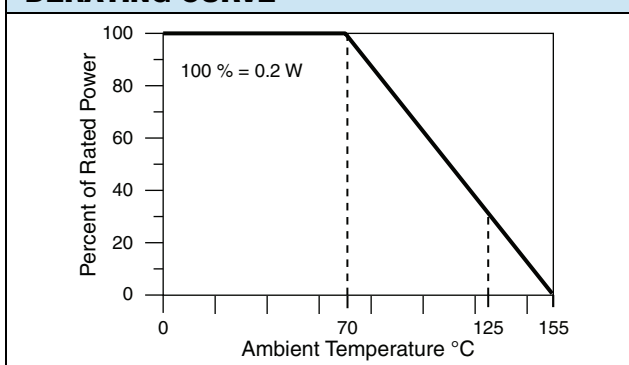DERATING CURVE

ENVIRONMENTAL TESTS

| ENVIRONMENTAL TEST | CONDITIONS | SUGGESTED PRODUCT LIMITS ABS/RATIO | MAX. VALUES ABS/RATIO |
|------------------------------|--|---|--------------------------|
| High Temperature Exposure | < 1 kΩ: MIL-STD-202, 108, 1000 h at 125 °C | ± 0.5 %/± 0.5 % | ± 0.35 %/± 0.35 % |
| | > 1 kΩ: MIL-STD-202, 108, 1000 h at 125 °C | ± 0.25 %/± 0.1 % | ± 0.02 %/± 0.008 % |
| Temperature Cycling | JESD22, JA-104, 1000 cycles at -55 °C to +125 °C | ± 0.25 %/± 0.1 % | ± 0.1 %/± 0.027 % |
| Moisture Resistance | MIL-STD-202, 106 | ± 0.25 %/± 0.1 % | ± 0.03 %/± 0.012 % |
| Biased Humidity | MIL-STD-202, 103, 1000 h at 85 °C, 85 % RH, 10 % P | ± 1.0 %/± 0.5 % | ± 0.4 %/± 0.34 % |
| Life | < 1 kΩ: MIL-STD-202, 108 at 125 °C, 1000 h | ± 0.5 %/± 0.5 % | ± 0.35 %/± 0.35 % |
| | > 1 kΩ: MIL-STD-202, 108 at 125 °C, 1000 h | ± 0.5 %/± 0.1 % | ± 0.04 %/± 0.03 % |
| Mechanical Shock | MIL-STD-202, 213, condition C | ± 0.25 %/± 0.1 % | ± 0.03 %/± 0.018 % |
| Vibration | MIL-STD-204, 10 Hz to 2 kHz | ± 0.25 %/± 0.1 % | ± 0.02 %/± 0.047 % |
| Resistance to Soldering Heat | MIL-STD-202, 210, condition B | ± 0.25 %/± 0.1 % | ± 0.13 %/± 0.024 % |
| Electrostatic Discharge | < 1 kΩ: AEC-Q200-002 at 500 V human body | ± 0.5 % | ± 0.50 % |
| | > 1 kΩ: AEC-Q200-002 at 1000 V human body | ± 0.5 % | ± 0.25 % |
| Solderability | J-STD-002 method B and B1 | Visual | Visual |
| Terminal Strength | AEC-Q200-006 at 1 kg for 60 s | ± 0.25 %/± 0.1 % | ± 0.02 %/± 0.018 % |
| Flame Retardance | AEC-Q200-001 para 4.0 | Visual | Visual |



GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: MPMA1003AWS

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|
| M | P | M | A | | 1 | 0 | 0 | 3 | | | | | A | T | 1 |
| M | P | M | A | 1 | 0 | 0 | 1 | 5 | 0 | 0 | 1 | | A | T | 1 |

| GLOBAL MODEL (3 or 4 digits) | RESISTANCE (4 or 8 digits) | TOLERANCE AND RATIO TOLERANCE | PACKAGING |
|---|--|---|--|
| MPMA Ni/Pd/Au = e4 termination | First 3 digits are significant figures and the last digit specifies the number of zeros to follow. When like values are required use total resistance. When dual values are required list both values. Example: (List R ₁ first in part number with dual values) 1002 = 10K (5K/5K) 1003 = 100K (50K/50K) 10011002 = 1K/10K divider | Abs. Tol. Ratio A = 0.1 % 0.05 % B = 0.1 % 0.1 % C = 0.25 % 0.1 % D = 0.5 % 0.1 % F = 1 % 0.5 % | TAPE AND REEL T1 = 1000 min., 1000 mult ⁽¹⁾ T5 = 500 min., 500 mult TF = Full reel 4000 TP = 100 min., 1 mult (package unit single lot date code) TS = 100 min., 1 mult |

Note

⁽¹⁾ Preferred packaging code



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[MPMA10011002AT5](#) [MPMA10012001AT5](#) [MPMA5002AT5](#) [MPMA2002AT5](#) [MPMA1001AT5](#) [MPMA50011002AT5](#)
[MPMA2001AT5](#) [MPMA10012502AT5](#) [MPMA1002AT5](#) [MPMA10015001AT5](#) [MPMA10015002AT5](#) [MPMA2001AT1](#)