



REV	DATE	ECO#
A	03/31/95	1342

DRAWING NOT TO SCALE  
ALL DIMENSIONS IN INCHES

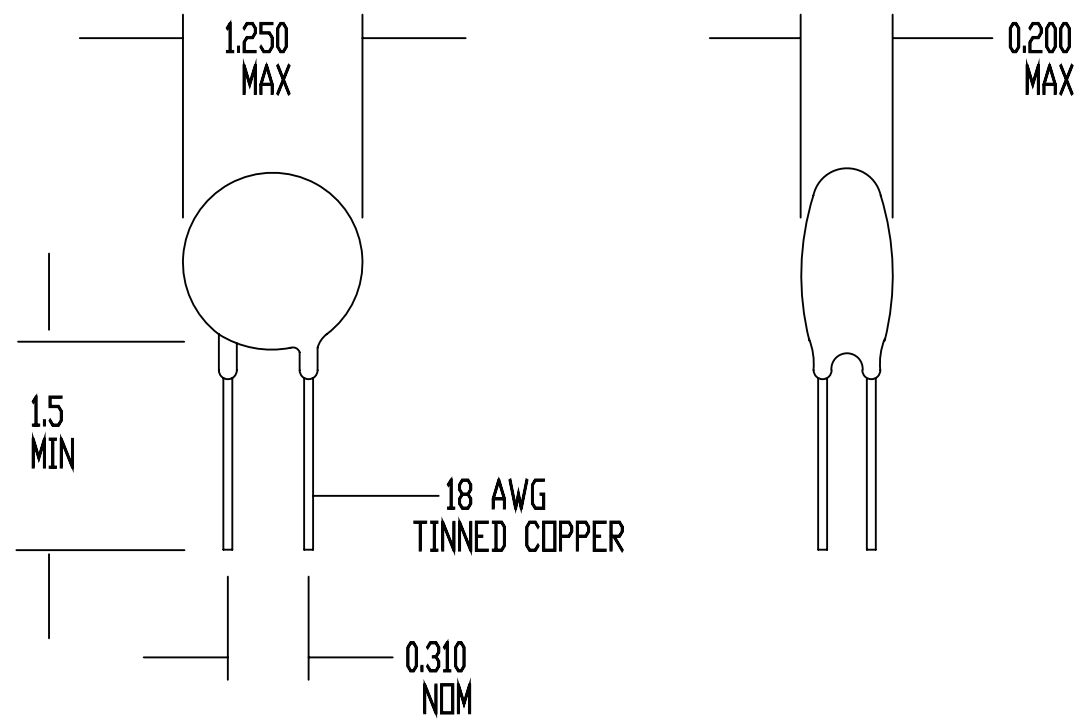

**SPECIFICATIONS:**

RESISTANCE AT 25 DEG C = 0.5 OHMS +/- 20%  
 MAX CONTINUOUS CURRENT (I<sub>max</sub>) = 30 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.010 OHMS NOMINAL  
 MAX VOLTAGE RATING = 120 VAC (RMS)  
 MAX SURGE RATING = 31 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 MARKING = OPTIONAL  
 LEADS = RODAN P/N STL-209-50

DRAWN BY D. NGUYEN		 <b>Circuit Protection Thermistors</b>
DATE 12/06/88	ORIG. F. TISEO	
REV A	APP	<b>SURGE-GARD INRUSH CURRENT LIMITER</b>
SHEET 1 OF 1		SG260

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SG260](#)