PUSHBUTTON SWITCHES

# **SERIES TL 2243 SWITCHES**

### TACT SWITCHES - Dual



Contact Rating:	50mA @ 12 VDC	
Life Expectancy:	30,000 cycles	
Contact Resistance:	100mΩ max.	
Insulation Resistance:	100MΩ min. @ 100 VDC	
Dielectric Strength:	250VAC	
Actuation Force:	180 ±50 gf	
Operating Temperature:	-20°C to 70°C	
Travel:	0.25 +0.2mm / -0.1mm	

#### **FEATURES & BENEFITS**


- Low profile
- ► Tactile feel
- ► Saves space on the PC Board

#### APPLICATIONS/MARKETS

- ► Telecommunications
- ► Consumer Electronics
- ► Audio/visual
- ► Medical
- ► Testing/instrumentation
- ► Computer/servers/peripherals



#### **HOW TO ORDER**





Example Ordering Number TL-2243


12240

Specifications subject to change without notice.

Fax: 763-531-8235

### TL 2243



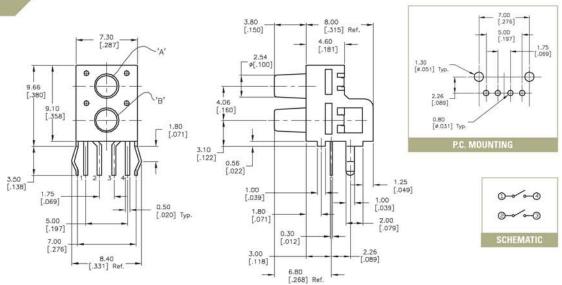



36

Phone: 800-867-2717

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch: