
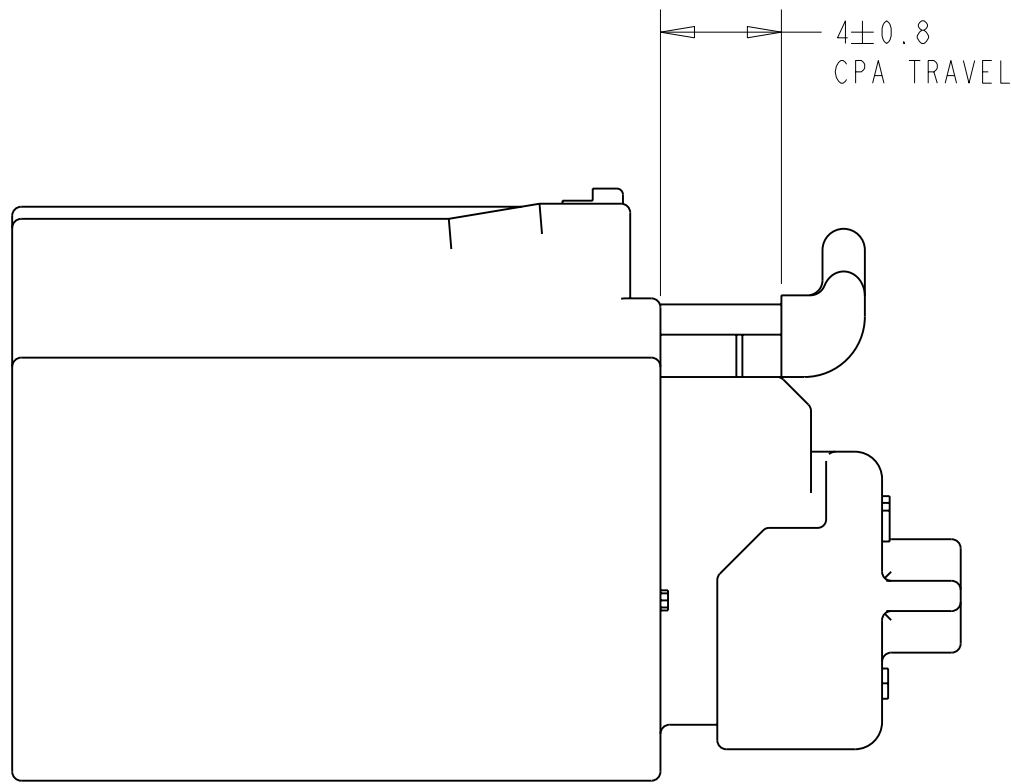


SECTION A-A
SHOWN WITH TPA
AND CPA (OPTIONAL) IN
THEIR PRE-LOADED POSITIONS

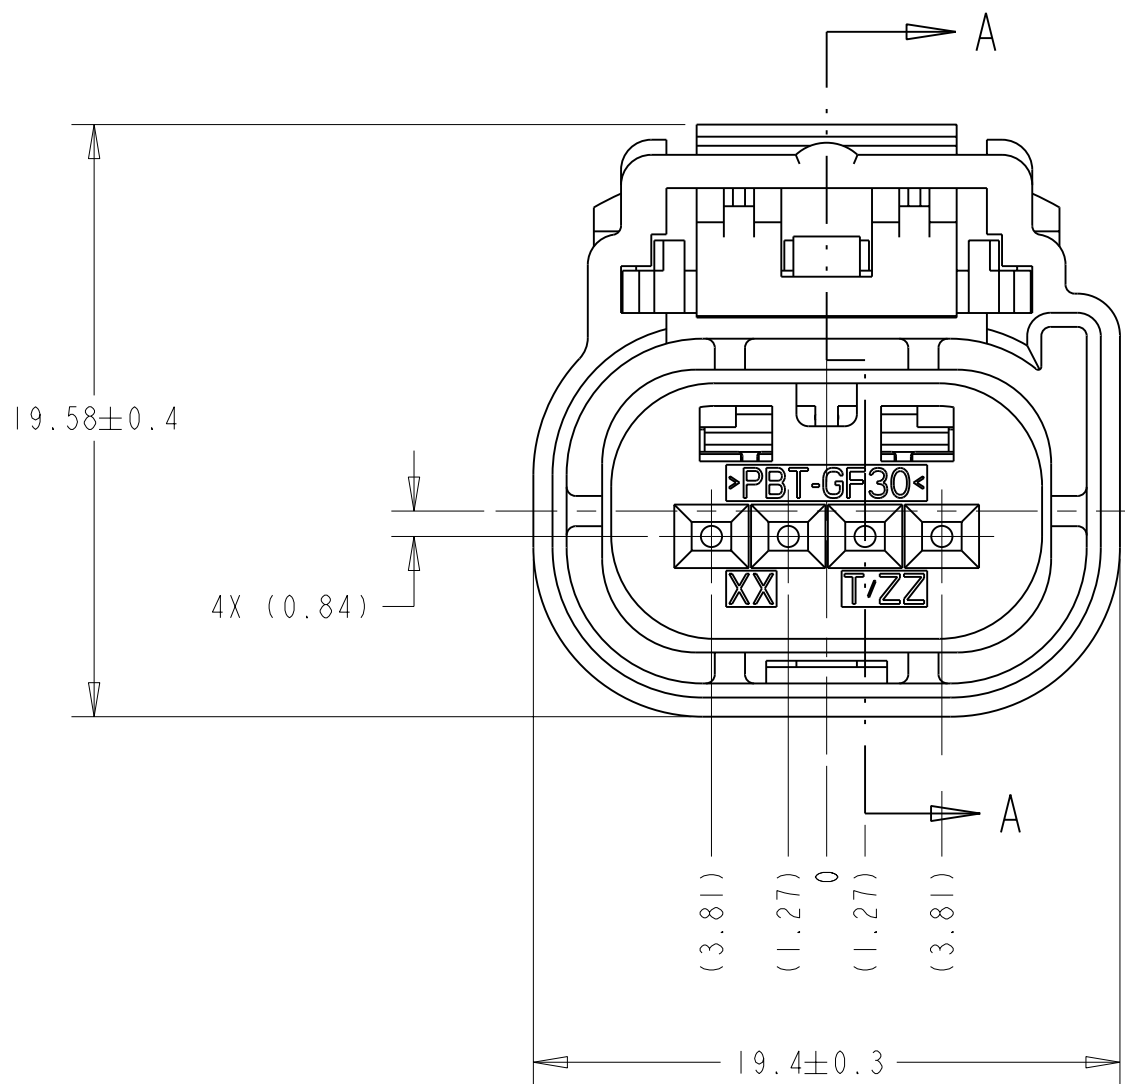

LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
D3		Dimensions updated, ECR-07-009742		25APR2007	HM	GM	
E		SEE ECR-11-009284 AND ECR-11-009557		09MAY2011	JM	GS	




PIN-OUT CHART			
	3	4	1438188-1 1719256-2 9-1419167-9
2			9-1419167-5 1719256-3
			1719256-1 9-1419167-8 1419168-1 0-1419168-2 9-1419167-0 9-1419167-1 9-1419167-2 9-1419167-3
1	2	3	4
TERMINAL HOLE POSITION			ASSEMBLY PART NUMBER
CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS			
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS			

KEYING OPTION "A"

KEYING OPTION "B"

KEYING OPTION "C"

KEYING OPTION "D"

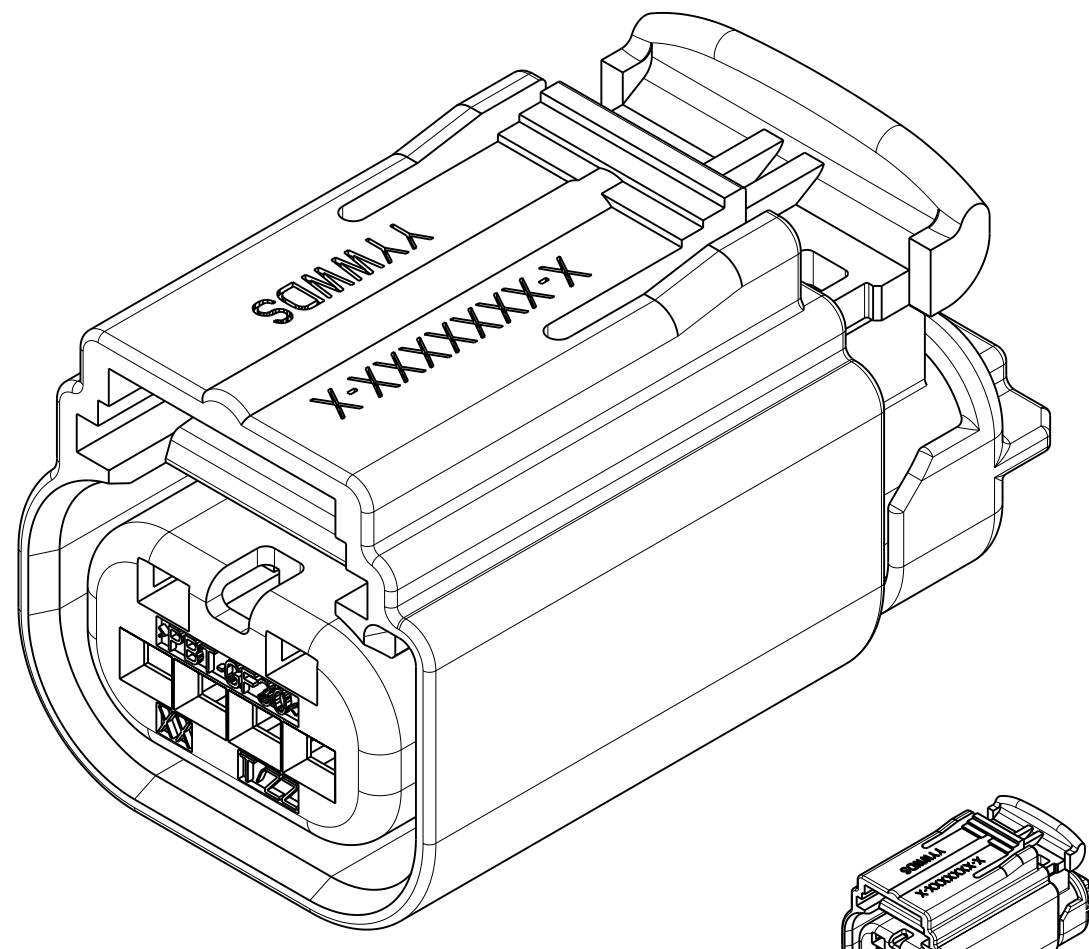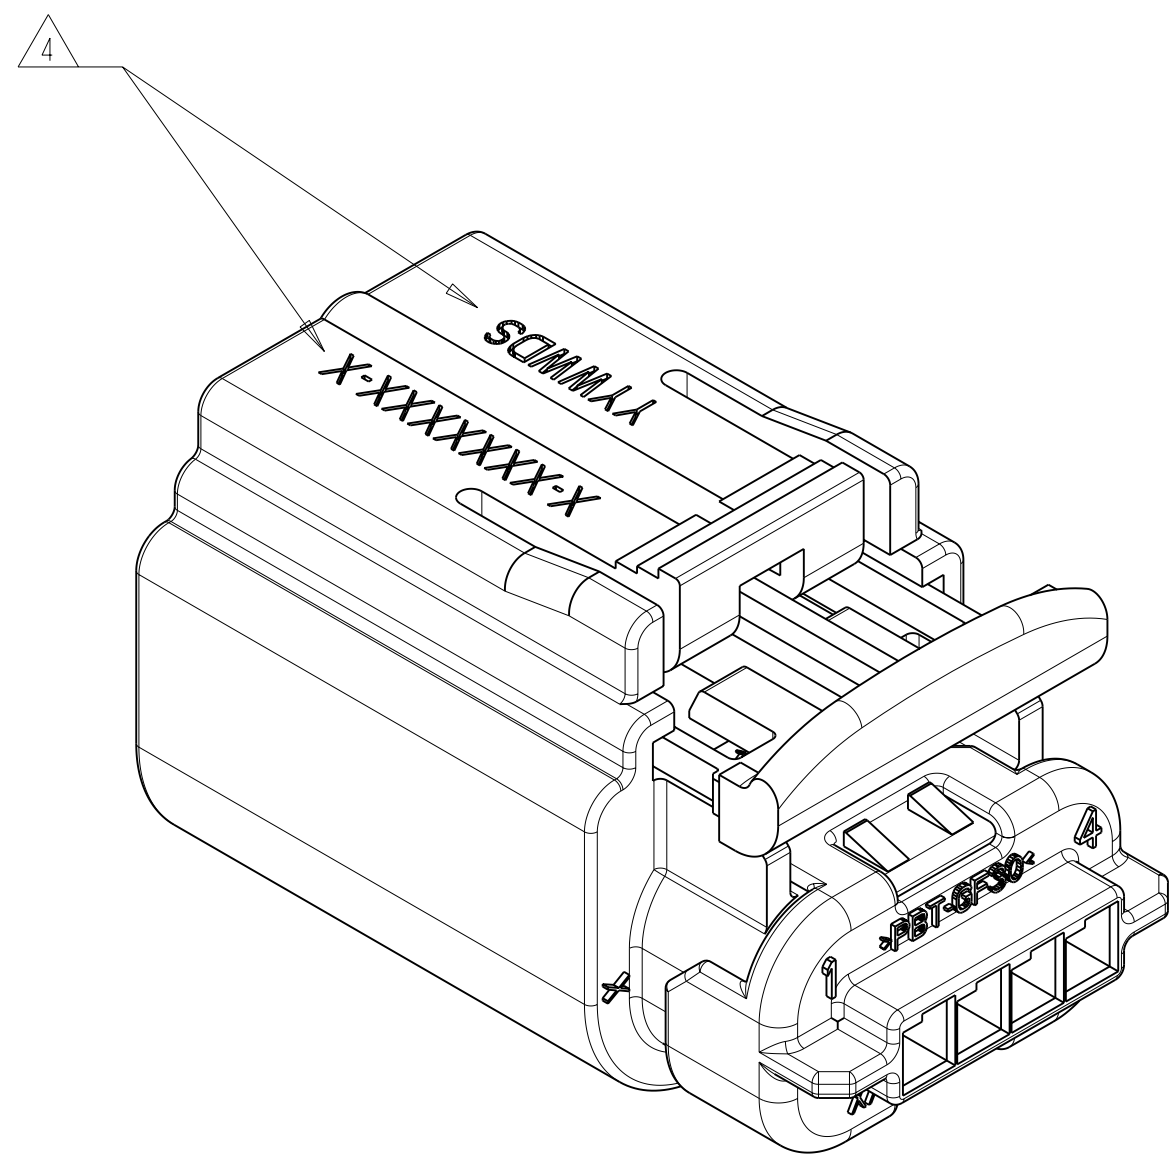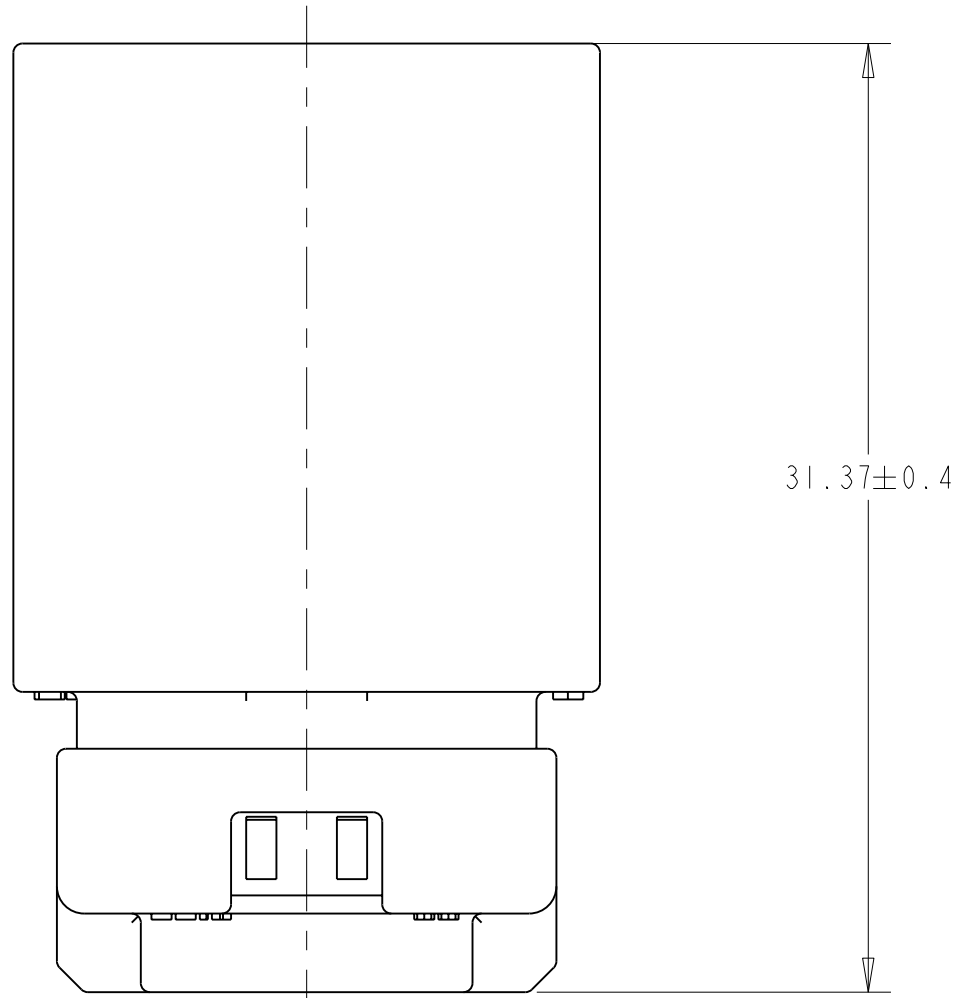

KEYING OPTION "A" SHOWN
SEE NOTE 5 FOR APPLICABLE
HEADER INTERFACE INFORMATION

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.

2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm2)


3. TPA AND CPA (OPTIONAL) ARE SHIPPED IN THEIR PRE-LOADED POSITIONS. ALL ASSEMBLIES ARE TO BE BULK PACKAGED.

4. TE ASSEMBLY PART NUMBER (X-XXXXXX-X) AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, WW = TWO DIGIT WEEK, D = ONE DIGIT DAY OF THE WEEK, S = ONE DIGIT SHIFT NUMBER) ARE PRINTED IN THIS LOCATION.

5. APPLICABLE HEADER INTERFACE DRAWING 1438198 IS AVAILABLE UPON REQUEST. A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TE PRODUCT MANAGER, VIA YOUR TE SALES REPRESENTATIVE OR CUSTOMER SERVICE.


6. PART ASSEMBLY WEIGHT WITHOUT TERMINALS:
WITHOUT CPA: 5.70 GRAMS
WITH CPA: 6.10 GRAMS

7. THESE PART NUMBERS ARE NOT RELEASED FOR PRODUCTION. PLEASE CONTACT YOUR TE SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

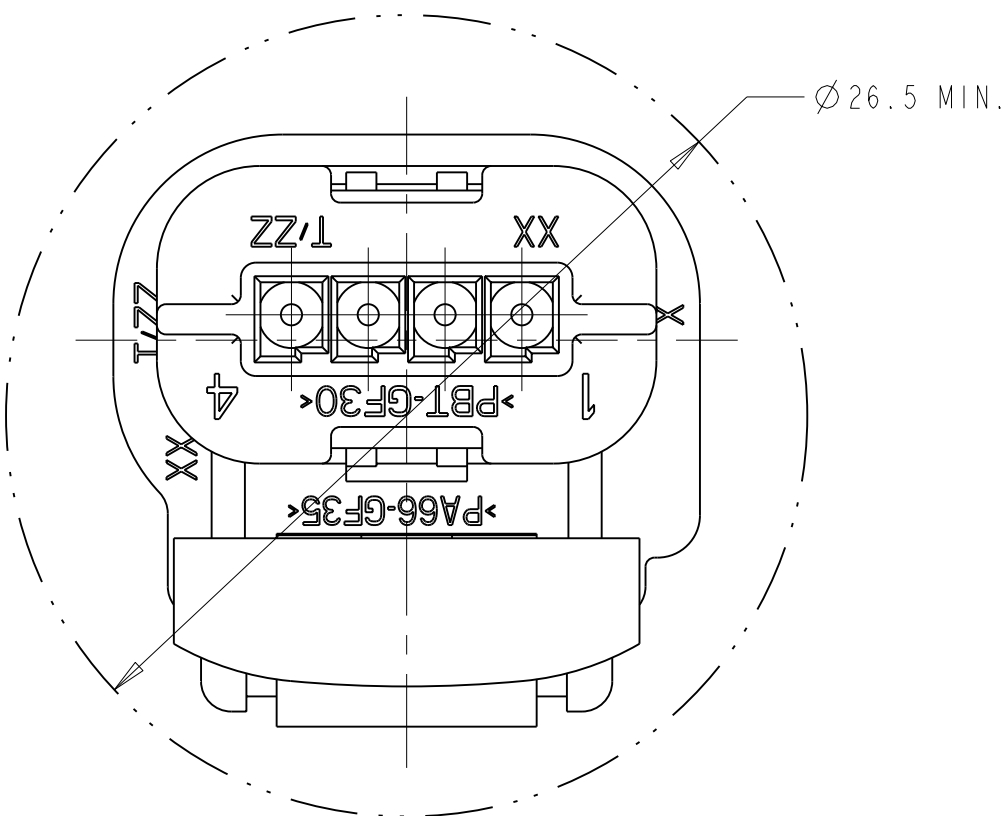

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

<--- ASSEMBLY PART NUMBERS											
← ASSEMBLY REVISION											
B	B	C			E	E	E		E	E	E
I	I	I						I	I	I	I
I	I	I	I	I	I	I	I	I	I	I	I
I	I	I	I	I	I	I	I	I	I	I	I
I	I	I	I	I	I	I	I	I	I	I	I
I	I	I	I	I	I	I	I	I	I	I	I
		I						I			I
									I		
		I							I		
I	I								I	I	I
QUANTITY								ITEM	DESCRIPTION		
								6	CPA	PBT-GF15	RED
								5	PERIMETER SEAL	SILICONE	WHITE BLUE
								4	GROMMET	SILICONE	BROWN
								3	COVER	PBT-GF30	BLUE (E)
								2	TPA	PBT-GF30	BLUE (E)
								I	PLUG WITH KEYING OPTION "D"	PA66-GF35	GREY
								I	PLUG WITH KEYING OPTION "C"	PA66-GF35	GREY
								I	PLUG WITH KEYING OPTION "B"	PA66-GF35	GREY
								I	PLUG WITH KEYING OPTION "A"	PA66-GF35	GREY

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	16JAN2002						
				CHK	M. FORISKA						
				APVD	A. SHUMAN						
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC						NAME	
mm				-						1 X 4 SEALED	
		0 PLC ±.3		-						FEMALE PLUG ASSEMBLY	
		3 PLC ±0.10		-						CUSTOMER SPEC. (EUROPE)	
		5 PLC ±.		APPLICATION SPEC							
		4 PLC ±.									
ANGLES ±		±3°								SIZE	
FINISH										CAGE CODE	
										DRAWING NO	
MATERIAL				WEIGHT						RESTRICTED TO	
-		-		SEE NOTE 8						A1	
				CUSTOMER DRAWING						00779	
										C=9-1419167-0	
										SCALE	
										4:1	
										SHEET	
										OF	
										REV	
										E	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1719256-1](#)