


PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

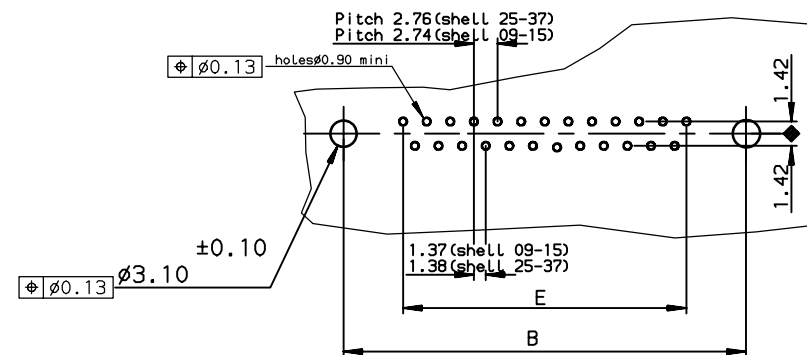

#### TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PA00
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PA00
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PA00
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PA00

Protection: 4 --> flash AU  
6 --> 0.76μ AU




#### LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PA00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PA00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PA00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PA00LF

Protection: 4 --> flash AU  
6 --> 0.76μ AU

#### GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	JOUBERT	1996/09/10	ANGULAR	LINEAR	0.X		±0.1		size A3	Scale 2
Eng	PESSON	1996/09/10			0.XX		±0.1			
Chr	LEGARE	1996/09/10			0.XXX		±0.1			
Appr	LEGARE	1996/09/10	0.XX° ±2°				ECN		LS06-0097	
			Product family				D-SUB		Spec ref -	
			FEMALE CONNECTOR STD EUROPE				dwg no		C01-8646-0490	
			straight solder type for PCB 1.6mm							
catalog no			-				CUSTOMER		sheet of 1	

rev	ecn no	dr	date
A	-	JOU	1996/09/10
C	L505-001	MPE	2005/03/10
D	L506-0097	LGO	2006/07/28
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09S24A6PA00LF](#) [D15S24A4PA00LF](#) [D15S24A6PA00LF](#) [D25S24A4PA00LF](#) [D25S24A6PA00LF](#)  
[D37S24A4PA00LF](#) [D37S24A6PA00LF](#) [D09S24A4PA00LF](#)