

## Electronic housing - ME 22,5 F-UT BK - 2890195

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Component housing, with vents, Lower part, Cross connection: without bus connector, color: black, width: 22.5 mm, number of positions cross connector: not relevant

### Your advantages

- Item is from the ME product range
- Tool-free mounting
- Available in overall widths from 12.5 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional bus connector that is either integrated or mounted on the DIN rail



### Key Commercial Data

Packing unit	10 pc
Minimum order quantity	300 pc
GTIN	
GTIN	4046356075084

### Technical data

#### Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings


# Electronic housing - ME 22,5 F-UT BK - 2890195

Dimensional drawing

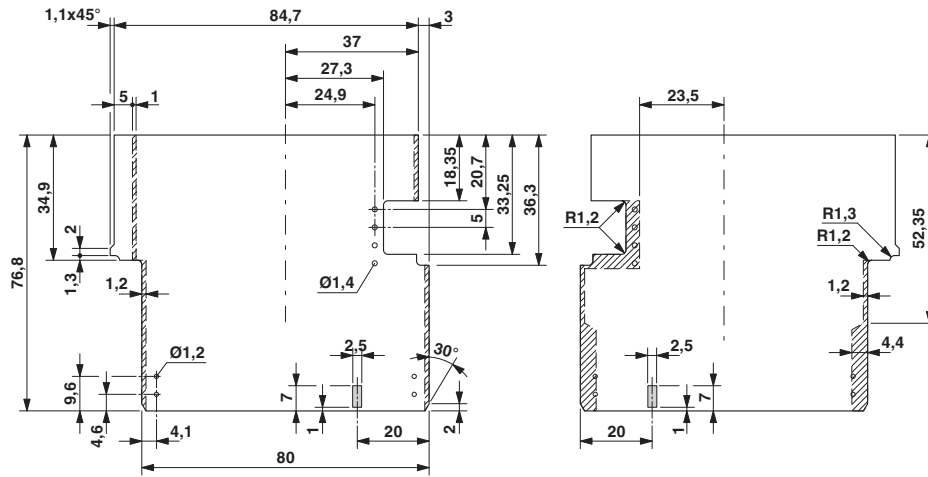

Dimensional drawing of the ME 22.5 flat... printed circuit board if the single-level upper part is used


Dimensional drawing

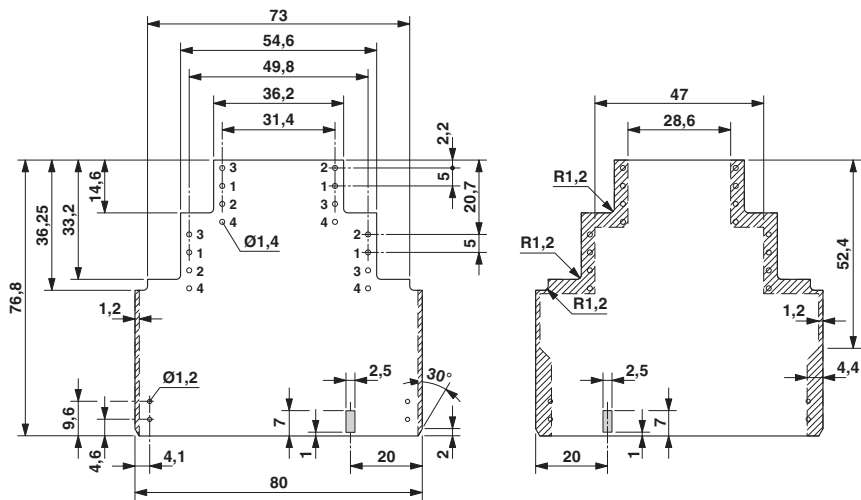

Dimensional drawing of the ME 22.5 flat... printed circuit board if the double level upper part is used

# Electronic housing - ME 22,5 F-UT BK - 2890195

Dimensional drawing

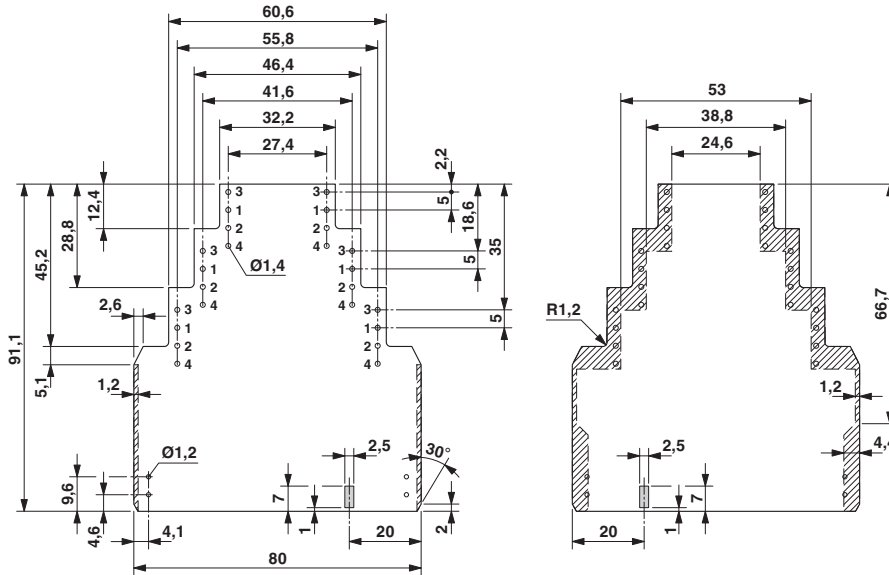

Dimensional drawing of the ME 22.5 flat... printed circuit board if the triple-level upper part is used

## Approvals

Approvals

Approvals

cUL Recognized / null / null / null / null / null / cULus Recognized

Ex Approvals

## Approval details

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
Nominal voltage UN	300 V		
Nominal current IN	10 A		
mm <sup>2</sup> /AWG/kcmil	30-12		

## Electronic housing - ME 22,5 F-UT BK - 2890195

### Approvals

---

---

---

cULus Recognized



Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2890195](#)