

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER ECO-16-004940	06AUG2016	NK	MZ

D

C

B

A

D





C

B

A

207610

Ø2.64
[Ø.104]
4 HOLES

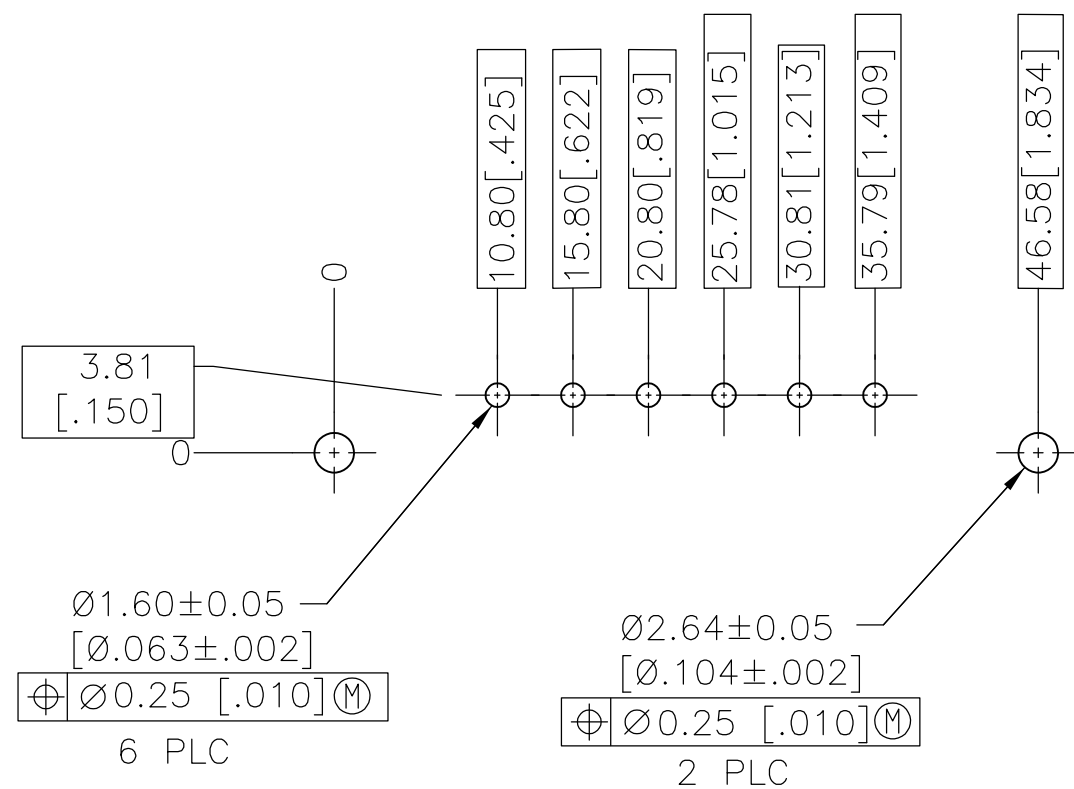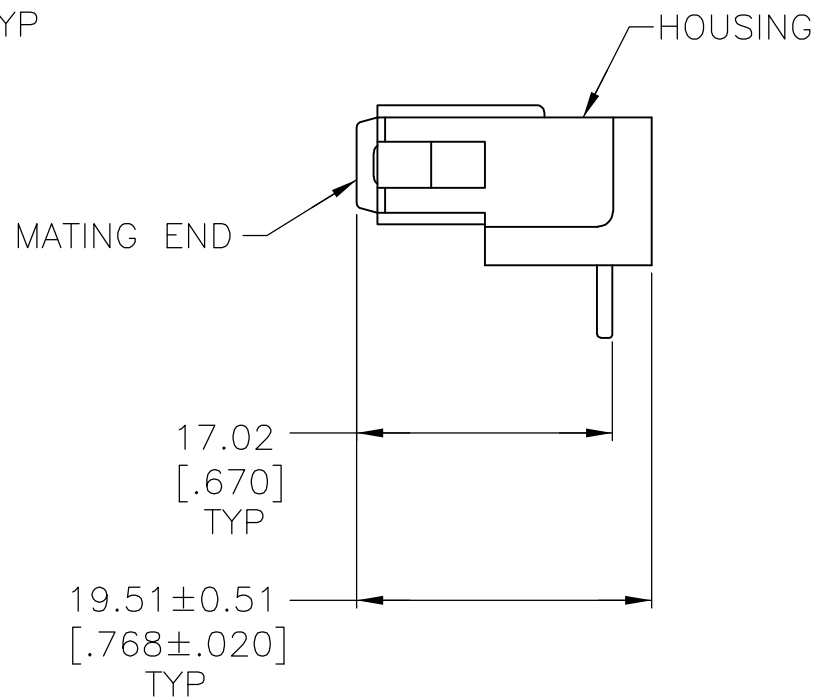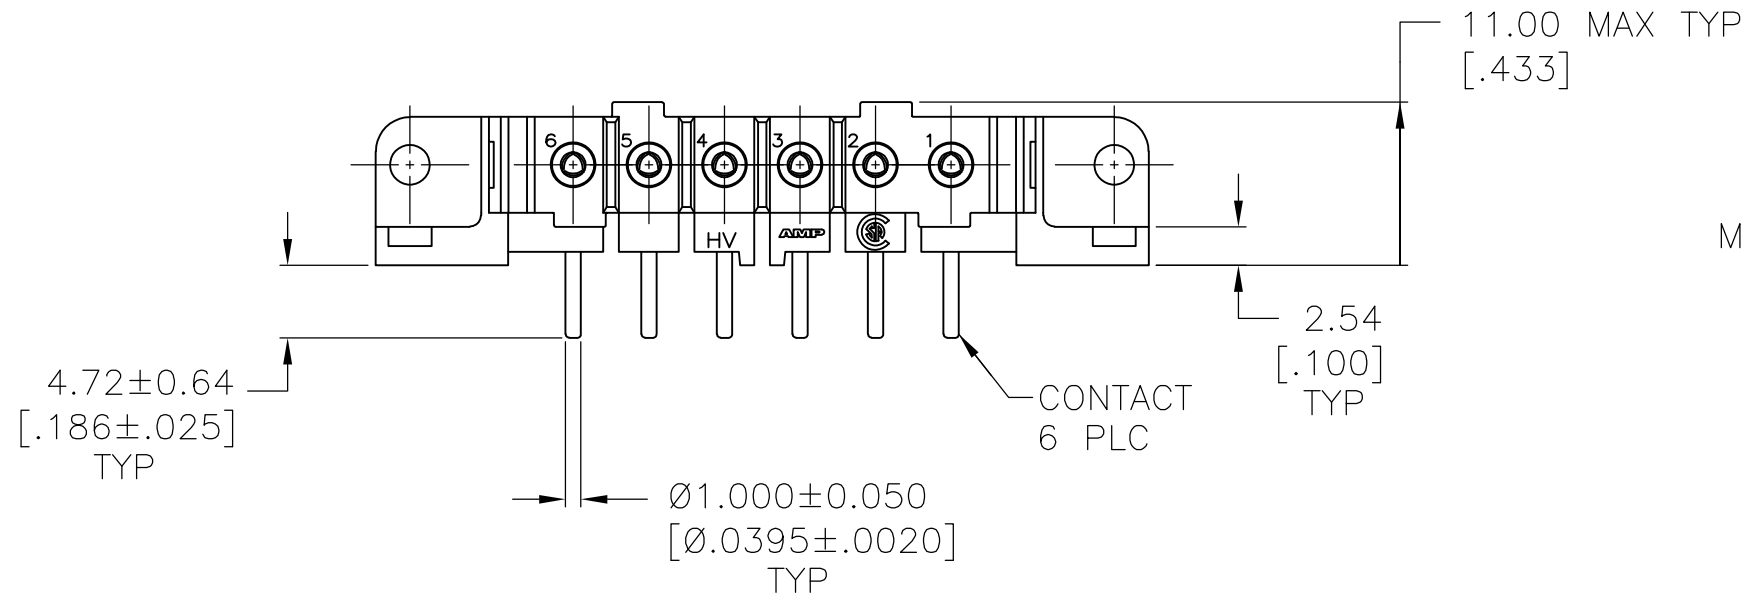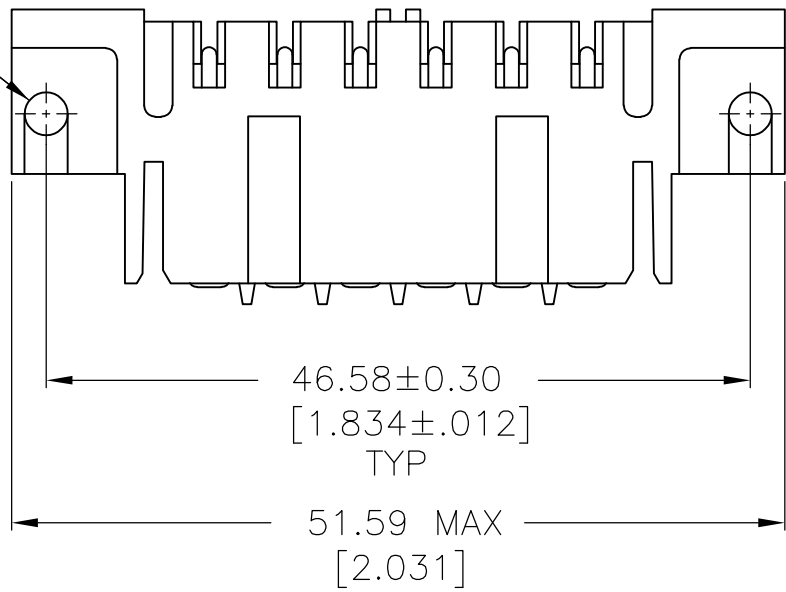

RECOMMENDED PC BOARD LAYOUT

- 1 3.81um [.000150] MIN TIN-LEAD OVER 0.76um [.000030] MIN NICKEL.
- 2 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 5.23 [.206] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 3 3.81um [.000150] MIN TIN OVER 0.76um [.000030] MIN NICKEL.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 5.23 [.206] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

OBSOLETE	4	207610-7
	3	207610-6
	2	207610-3
	1	-207610-1
CONTACT FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 08/06/92	TE Connectivity		
DIMENSIONS: INCHES		CHK J.McCLINTON 8-11-92			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD A.TRAVIS 8-11-92		
	FINISH		PRODUCT SPEC 108-10033		
MATERIAL HSG: NYLON, RED		CONTACTS: SEE TBL		APPLICATION SPEC —	
		WEIGHT		CUSTOMER DRAWING	
		SCALE 2:1		SHEET 1 of 1	
		REV K		RESTRICTED TO —	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207610-3](#)