



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	ECR-19-004449	20MAR2019	CL	RS

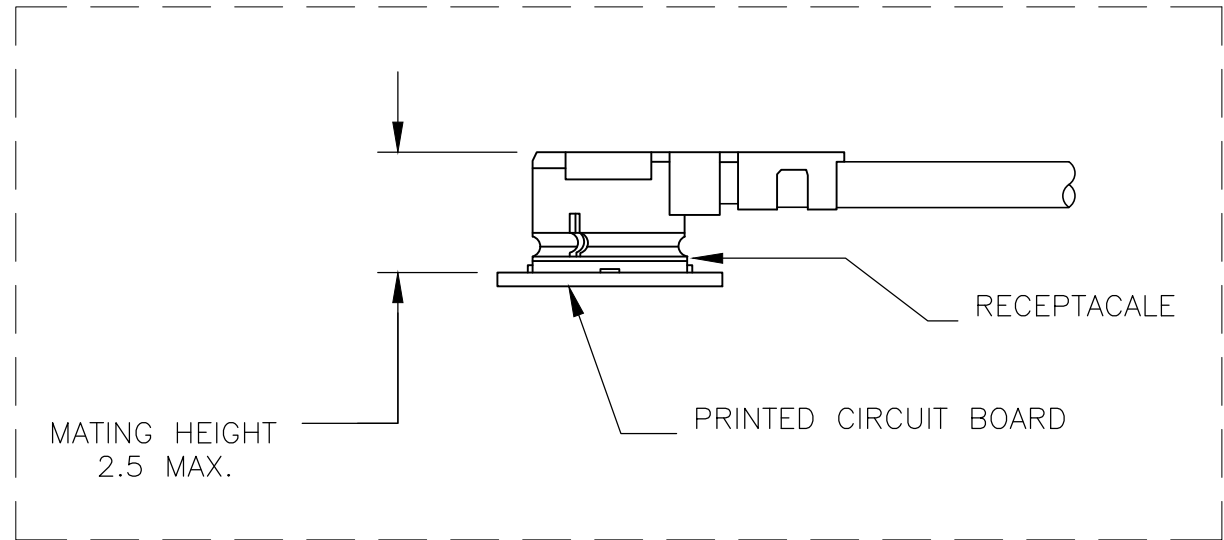

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
- 2 HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR TYPE III.
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100mS VSWR: 1.5:1 MAX.
- 4 H.S.T WILL BE 15REF FOR -2

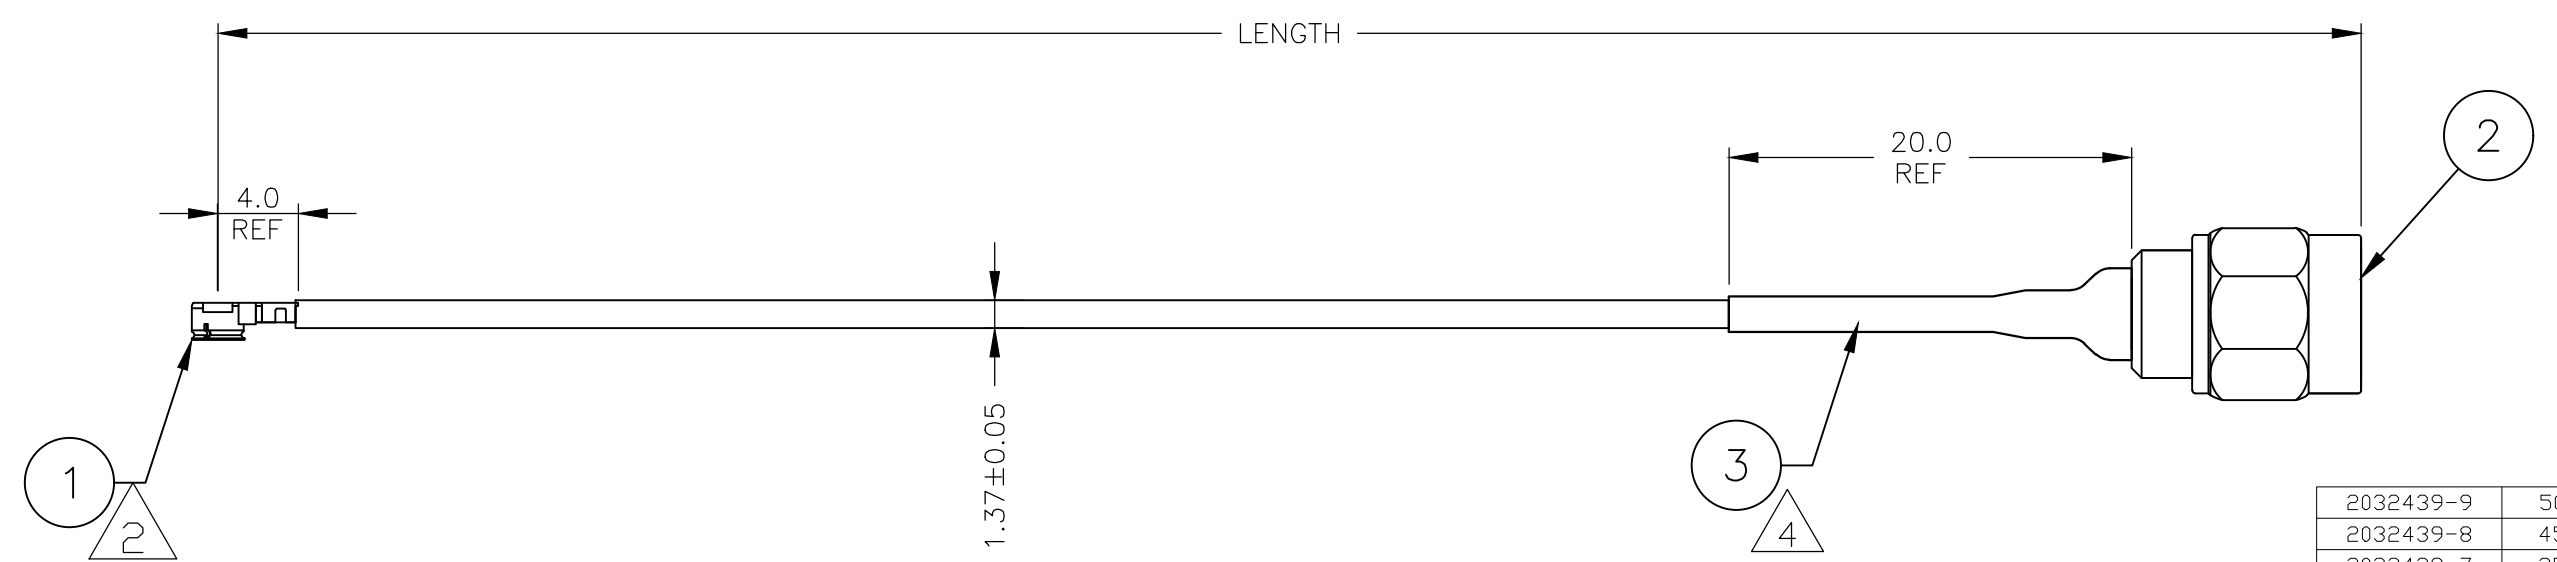

2032439-9	500±4
2032439-8	450±4
2032439-7	350±3
2032439-6	300±3
2032439-5	250±3
2032439-4	150±3
2032439-3	100±3
2032439-2	50±2
2032439-1	200±3
PART NUMBER	LENGTH

Q'TY	U/M	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	3
1	PC	SMA, PLUG	2
1	PC	UMCC, PLUG WITH 1.37 CABLE	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.C. CLAYBAUGH 04/DEC/07	<b>TE Connectivity</b>											
DIMENSIONS: mm [INCHES]		CHK J. ORNER 04/DEC/07												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ORNER 04/DEC/07												
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC			± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES
0 PLC	± -													
1 PLC	± -													
2 PLC	± -													
3 PLC	± -													
4 PLC	± -													
ANGLES	± -													
MATERIAL -	FINISH -	APPLICATION SPEC -	WEIGHT 0.000000	NAME CABLE ASSY, RF, UMCC PLUG TO SMA PLUG [1.37mm CABLE]										
		SIZE A3	CAGE CODE 00779	DRAWING NO C-2032439										
		CUSTOMER DRAWING		RESTRICTED TO -										
		SCALE N.T.S.	SHEET 1 OF 1	REV A2										