

(2.54 mm) .100"

# THROUGH-HOLE .025" SQ POST SOCKET

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SSW](http://www.samtec.com?SSW) or [www.samtec.com?SSQ](http://www.samtec.com?SSQ)

**Insulator Material:**  
Black Liquid Crystal Polymer (-S & -D) or Black High Temperature Thermoplastic (-T)

**Contact Material:**  
Phosphor Bronze

**Plating:**  
Au or Sn over

50 μm (1.27 μm) Ni

**Current Rating (SSW/TSM):**  
4.7 A per pin  
(2 pins powered)

**Current Rating (SSQ/TSW):**  
6.3 A per pin  
(2 pins powered)

**Operating Temp Range:**  
-55 °C to +125 °C with Gold  
-55 °C to +105 °C with Tin

**Insertion Depth:**  
(3.68 mm) .145" to  
(6.35 mm) .250"

**Normal Force:**  
Standard= 125 grams (4.4 N)

**Max Cycles:**  
100 with 10 μm (0.25 μm) Au

**Voltage Rating:**  
465 VAC / 655 VDC

**RoHS Compliant:**  
Yes

**Mates With:**  
TSW, MTSW, MTLW,  
EW, ZW, TSS, ZSS,  
TSM, TSSH, HTSS



TYPE STRIP



PIN CENTERS

NO. PINS PER ROW

SSW = Solder Tail

-1 = (2.54 mm) .100" Centers

SSQ = Square Tail

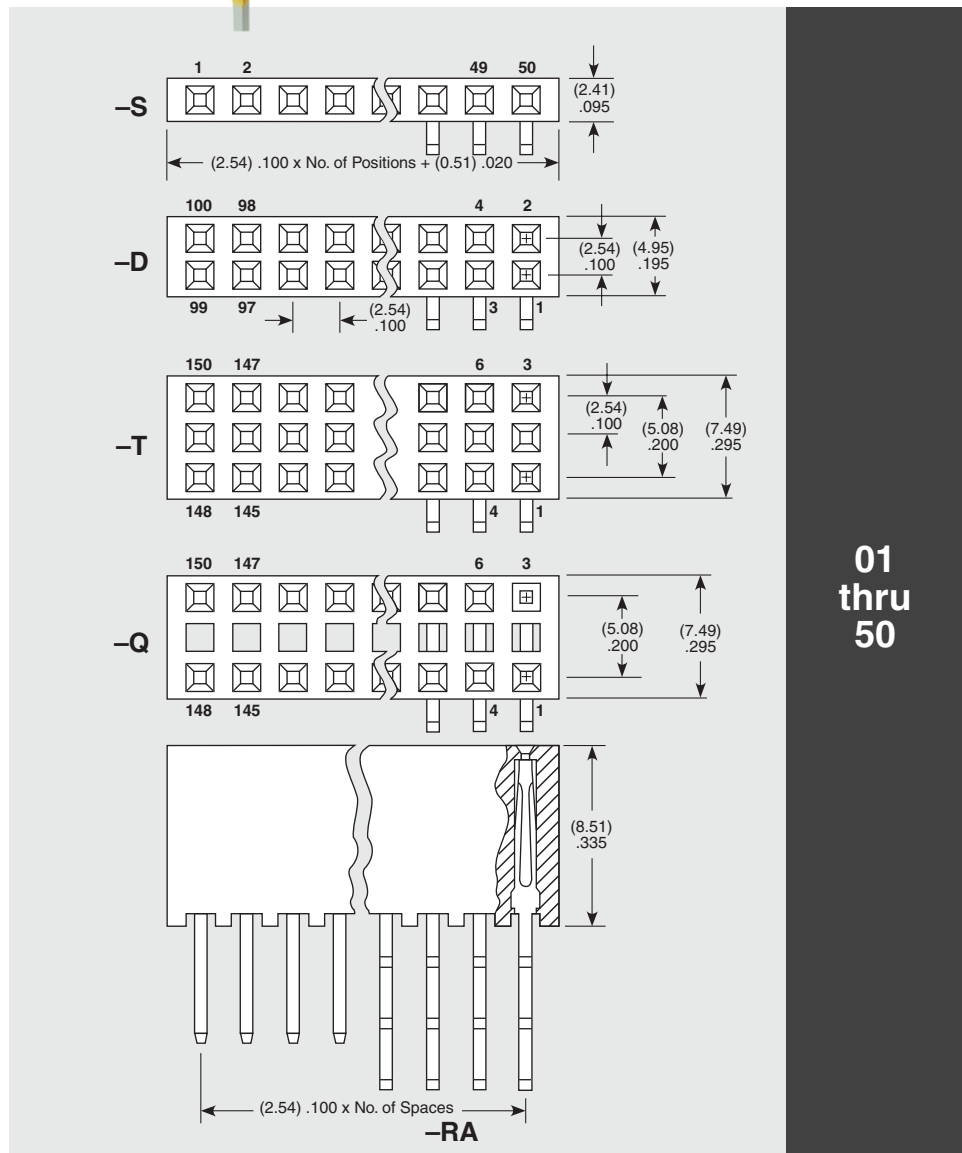

01 thru 50

## PROCESSING

**Lead-Free Solderable:**

Yes:  
-S and -D row option  
Wave only:  
-P, -T and -Q row option

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)




**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

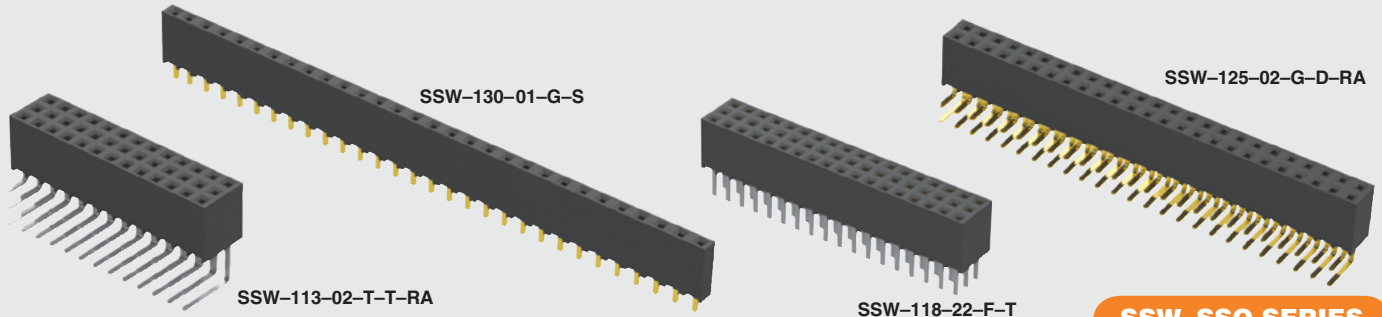

**SSW, SSQ SERIES**

**LEAD STYLE**

**PLATING OPTION**

**ROW OPTION**

**TAIL OPTION**

**OTHER OPTION**

- F**  
= Gold flash on contact, Matte Tin on tail
- L**  
= 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail
- G**  
= 20 μ" (0.51 μm) Gold on contact, Gold flash on tail
- T**  
= Matte Tin  
(-T N/A on LIF contacts)

- S**  
= Single Row
- P**  
= Single Row (36 pins max)
- D**  
= Double Row
- T**  
= Triple Row
- Q**  
= Double Row  
.200" (5.08 mm) row space  
(Outer rows filled only)

- RA**  
= Right-angle  
(Leave blank for straight pin version)

- LL**  
= Locking Lead
- 
- Two leads per strip crimped in opposite directions on or near centerline. Available on tails from (2.29 mm) .090" to (7.87 mm) .310" only. N/A with single row 1 or 2 positions.

- "XXX"**  
= Polarized  
(Specify "XXX" as position number)


**ALSO AVAILABLE (MOQ Required)**

- Other platings
- Notch option

**Straight Pin Versions (Specify "LEAD STYLE" from chart)**

LEAD STYLE		SINGLE DOUBLE OR TRIPLE A
Standard Insertion Force	Low Insertion Force*	
-01	-21	(2.64) .104
-02	-22	(4.93) .194
-03	-23	(10.00) .394
-04	-24	(14.83) .584
-06**	Not Available	(3.15) .124


\* LIF not available with Tin Plating  
\*\*Style -06 Not available with SSQ

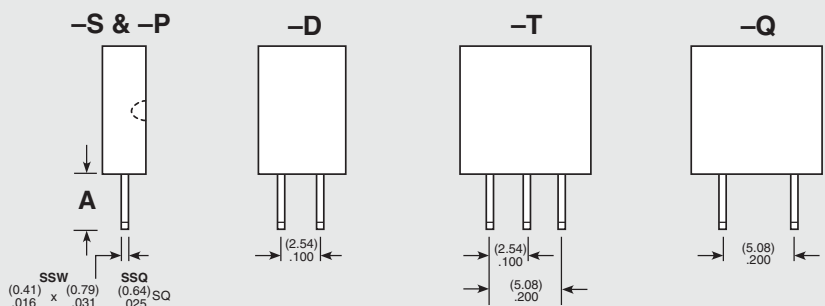

**Right-Angle Versions (Specify "LEAD STYLE" from chart)**

LEAD STYLE		SINGLE	DOUBLE	TRIPLE
Standard Insertion Force	Low Insertion Force*	(-S) A	(-D) A	(-T & -Q) A
-02	-22	(2.54) .100	(2.54) .100	(2.54) .100
-03	-23	(7.62) .300	(7.62) .300	Not Available
-04	-24	(12.45) .490	Not Available	Not Available

\*LIF not available with Tin Plating

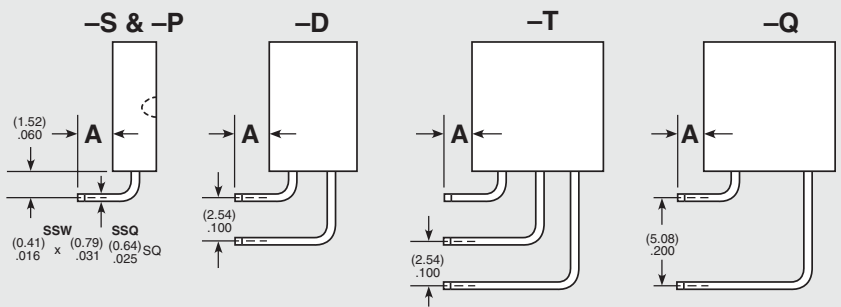

Due to technical progress, all designs, specifications and components are subject to change without notice.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[SSQ-108-01-S-D](#) [SSQ-110-01-G-D](#) [SSQ-132-01-G-D](#) [SSQ-104-01-G-D](#) [SSQ-117-01-G-D](#) [SSQ-108-01-S-D-LL](#)  
[SSQ-105-02-G-D-RA](#) [SSQ-105-01-S-D](#) [SSQ-112-01-G-D](#) [SSQ-105-01-G-S](#) [SSQ-106-01-G-S](#) [SSQ-110-01-S-D](#)  
[SSQ-105-01-T-D](#) [SSQ-120-02-G-D](#) [SSQ-132-02-G-D](#) [SSQ-135-02-T-D](#) [SSQ-105-03-G-D](#) [SSQ-108-01-G-D](#) [SSQ-](#)  
[120-01-T-D](#) [SSQ-110-01-T-D](#) [SSQ-112-02-G-D](#) [SSQ-115-01-G-S](#) [SSQ-120-01-G-D](#) [SSQ-110-03-S-D](#) [SSQ-106-01-](#)  
[G-D](#) [SSQ-110-03-G-S](#) [SSQ-110-01-F-D](#) [SSQ-104-03-G-D](#) [SSQ-105-02-T-D-RA](#) [SSQ-105-02-S-D-RA](#) [SSQ-103-02-](#)  
[T-D](#) [SSQ-105-02-S-S](#) [SSQ-109-01-G-D](#) [SSQ-110-01-T-S](#) [SSQ-105-01-F-D](#) [SSQ-105-01-S-D-LL](#) [SSQ-108-23-G-D](#)  
[SSQ-110-02-G-D](#) [SSQ-104-02-G-S](#) [SSQ-105-02-S-D-LL](#) [SSQ-105-03-S-D](#) [SSQ-110-01-G-S](#) [SSQ-111-01-G-D-010](#)  
[SSQ-105-21-G-D](#) [SSQ-102-01-S-D](#) [SSQ-120-03-F-S](#) [SSQ-110-03-G-D](#) [SSQ-126-02-T-D](#) [SSQ-109-02-G-S-RA](#) [SSQ-](#)  
[124-01-G-S](#) [SSQ-111-02-S-D-RA](#) [SSQ-126-01-G-T](#) [SSQ-110-23-F-D](#) [SSQ-118-02-G-S](#) [SSQ-123-23-G-D-LL](#) [SSQ-](#)  
[117-04-G-D](#) [SSQ-118-01-G-D](#) [SSQ-121-02-T-D](#) [SSQ-133-22-S-D](#) [SSQ-107-01-G-D](#) [SSQ-103-01-F-S](#) [SSQ-106-02-](#)  
[G-D](#) [SSQ-108-21-G-D](#) [SSQ-106-02-S-D-RA](#) [SSQ-106-03-S-D](#) [SSQ-107-01-T-D](#) [SSQ-103-01-G-D](#) [SSQ-110-04-F-S](#)  
[SSQ-110-23-F-S](#) [SSQ-114-04-G-D](#) [SSQ-108-02-S-D-RA](#) [SSQ-132-02-S-D](#) [SSQ-107-02-G-D-RA](#) [SSQ-116-02-T-S](#)  
[SSQ-113-23-G-D](#) [SSQ-116-01-S-D](#) [SSQ-111-21-G-D](#) [SSQ-117-02-G-D](#) [SSQ-120-22-G-D](#) [SSQ-120-01-S-D](#) [SSQ-](#)  
[127-21-G-D](#) [SSQ-114-02-G-S-RA](#) [SSQ-134-01-G-S](#) [SSQ-102-04-G-S](#) [SSQ-105-01-S-S-LL](#) [SSQ-106-01-L-D](#) [SSQ-](#)  
[107-02-G-S](#) [SSQ-101-01-G-S](#) [SSQ-102-03-G-S](#) [SSQ-105-02-S-S-RA](#) [SSQ-104-01-T-D](#) [SSQ-107-03-T-D](#) [SSQ-108-](#)  
[04-G-S](#) [SSQ-102-03-G-D](#) [SSQ-104-01-S-D](#) [SSQ-110-02-S-D-RA](#) [SSQ-107-01-L-D](#) [SSQ-113-03-T-D](#) [SSQ-105-02-T-](#)  
[D](#) [SSQ-108-02-S-S-RA](#)