


- 1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS
- 2 AVAILABLE IN 2 DIFFERENT SERIES
- 3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR


Technical drawing of a rectangular plate. The drawing shows a side view of the plate with a central horizontal slot. The overall height of the plate is labeled 'A' with a vertical dimension line. The overall width of the plate is labeled 'B' with a horizontal dimension line. The central slot is defined by two horizontal lines, and the plate has a consistent thickness throughout.

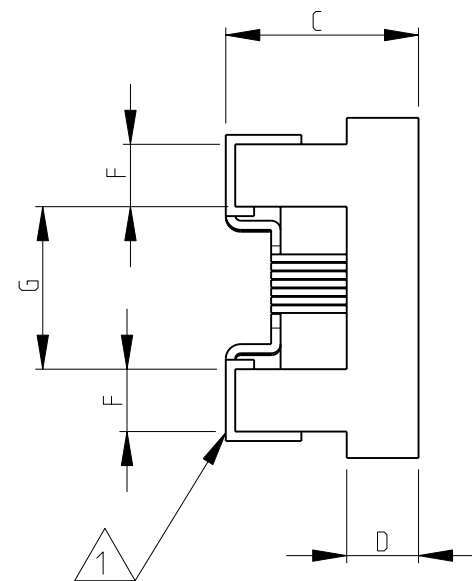

RoHS Compliant

36501E	1.27	0.76	0.61	0.15	0.23	0.56	0.66	0.50	0.46
36501J	1.80	1.12	1.02	0.38	0.33	0.86	1.02	0.64	0.64
SERIES	A MAX.	B MAX.	C MAX.	D REF.	F	G	H	K	J

DWN	SUBHASH.M	14-NOV-08
CHK	PRAKASH.S	14-NOV-08
APVD	STEPHEN.P	14-NOV-08

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
	0 PLC	± 0.2	
	1 PLC	± 0.1	
	2 PLC	$\pm -$	
	3 PLC	$\pm -$	
	4 PLC	$\pm -$	
	ANGLES	$\pm 5^{\circ}$	
MATERIAL	-	FINISH	-

TE Connectivity

8	NAME	LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650
---	------	--

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1624112	-

CUSTOMER DRAWING

SCALE	20:1	SHEET	1 OF 1	REV	BA1
-------	------	-------	--------	-----	-----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1624112-4](#)