
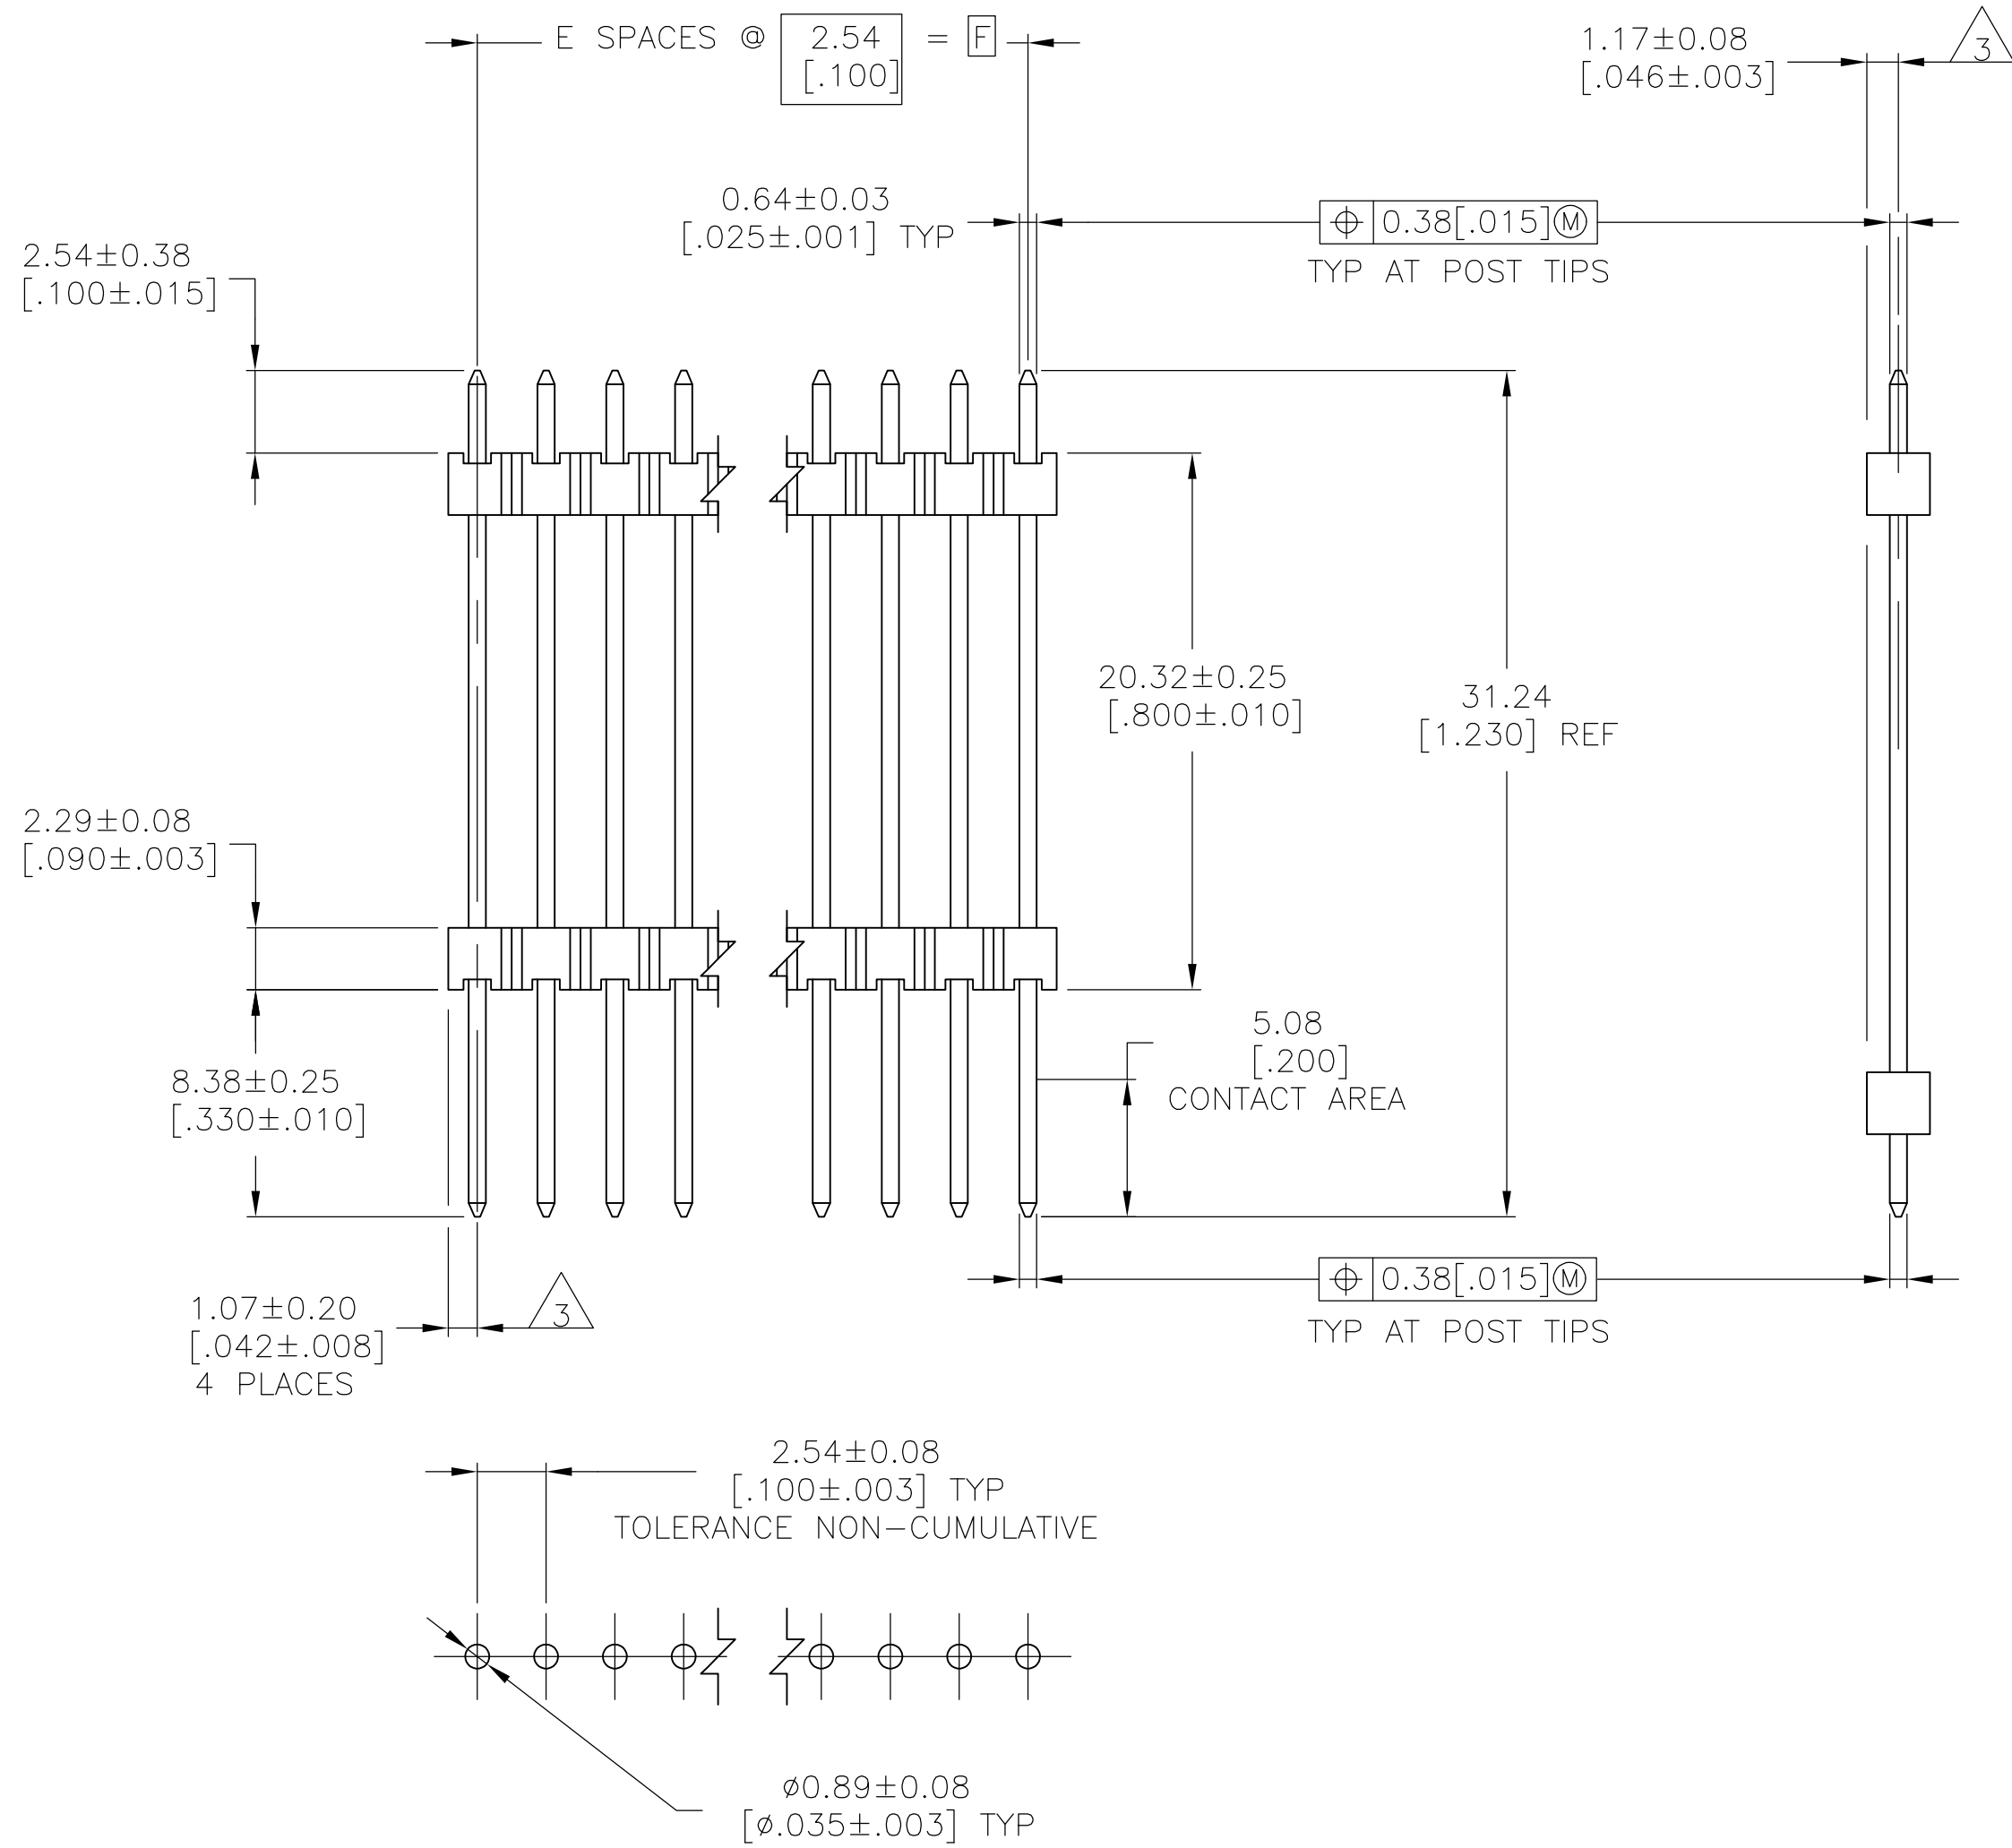


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

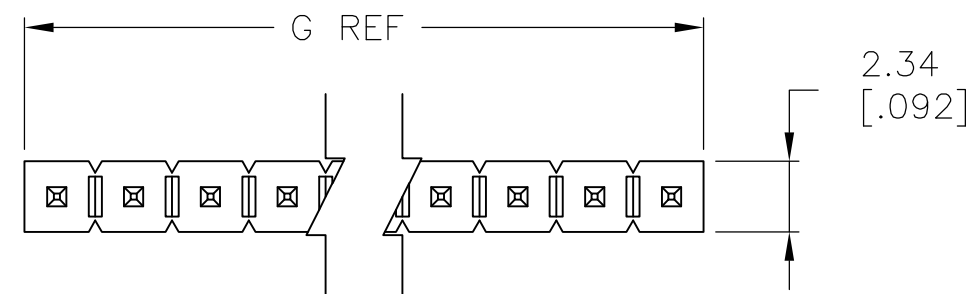


RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
6. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN
ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

6	101.19 [3.984]	99.06 [3.900]	39	40	9-146475-0
6	98.65 [3.884]	96.52 [3.800]	38	39	8-146475-9
6	96.11 [3.784]	93.98 [3.700]	37	38	8-146475-8
6	93.57 [3.684]	91.44 [3.600]	36	37	8-146475-7
6	91.03 [3.584]	88.90 [3.500]	35	36	8-146475-6
6	88.49 [3.484]	86.36 [3.400]	34	35	8-146475-5
6	85.95 [3.384]	83.82 [3.300]	33	34	8-146475-4
6	83.41 [3.284]	81.28 [3.200]	32	33	8-146475-3
6	80.87 [3.184]	78.74 [3.100]	31	32	8-146475-2
6	78.33 [3.084]	76.20 [3.000]	30	31	8-146475-1
6	75.79 [2.984]	73.66 [2.900]	29	30	8-146475-0
6	73.25 [2.884]	71.12 [2.800]	28	29	7-146475-9
6	70.71 [2.784]	68.58 [2.700]	27	28	7-146475-8
6	68.17 [2.684]	66.04 [2.600]	26	27	7-146475-7
6	65.63 [2.584]	63.50 [2.500]	25	26	7-146475-6
6	63.09 [2.484]	60.96 [2.400]	24	25	7-146475-5
6	60.55 [2.384]	58.42 [2.300]	23	24	7-146475-4
6	58.01 [2.284]	55.88 [2.200]	22	23	7-146475-3
6	55.47 [2.184]	53.34 [2.100]	21	22	7-146475-2
6	52.93 [2.084]	50.80 [2.000]	20	21	7-146475-1
6	50.39 [1.984]	48.26 [1.900]	19	20	7-146475-0
6	47.85 [1.884]	45.72 [1.800]	18	19	6-146475-9
6	45.31 [1.784]	43.18 [1.700]	17	18	6-146475-8
6	42.77 [1.684]	40.64 [1.600]	16	17	6-146475-7
6	40.23 [1.584]	38.10 [1.500]	15	16	6-146475-6
6	37.69 [1.484]	35.56 [1.400]	14	15	6-146475-5
6	35.15 [1.384]	33.02 [1.300]	13	14	6-146475-4
6	32.61 [1.284]	30.48 [1.200]	12	13	6-146475-3
6	30.07 [1.184]	27.94 [1.100]	11	12	6-146475-2
6	27.53 [1.084]	25.40 [1.000]	10	11	6-146475-1
6	24.99 [.984]	22.86 [.900]	9	10	6-146475-0
6	22.45 [.884]	20.32 [.800]	8	9	5-146475-9
6	19.91 [.784]	17.78 [.700]	7	8	5-146475-8
6	17.37 [.684]	15.24 [.600]	6	7	5-146475-7
6	14.83 [.584]	12.70 [.500]	5	6	5-146475-6
6	12.29 [.484]	10.16 [.400]	4	5	5-146475-5
6	9.75 [.384]	7.62 [.300]	3	4	5-146475-4
6	7.21 [.284]	5.08 [.200]	2	3	5-146475-3
6	4.67 [.184]	2.54 [.100]	1	2	5-146475-2
6	2.13 [.084]	-	-	1	5-146475-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.9 [3.984]	99.06 [3.900]	39	40	4-146475-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146475-9
5	96.11 [3.784]	93.98 [3.700]	37	38	3-146475-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146475-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146475-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146475-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146475-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146475-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146475-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146475-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146475-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146475-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146475-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146475-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146475-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146475-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146475-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146475-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146475-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146475-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146475-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146475-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146475-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146475-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146475-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146475-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146475-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146475-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146475-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146475-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146475-0
5	22.45 [.884]	20.32 [.800]	8	9	146475-9
5	19.91 [.784]	17.78 [.700]	7	8	146475-8
5	17.37 [.684]	15.24 [.600]	6	7	146475-7
5	14.83 [.584]	12.70 [.500]	5	6	146475-6
5	12.29 [.484]	10.16 [.400]	4	5	146475-5
5	9.75 [.384]	7.62 [.300]	3	4	146475-4
5	7.21 [.284]	5.08 [.200]	2	3	146475-3
5	4.67 [.184]	2.54 [.100]	1	2	146475-2
5	2.13 [.084]	-	-	1	146475-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. E. BRANDBERG 14MAR97	 TE Connectivity	
		CHK. G. DUBNICZKI 14MAR97		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS SPECIFIED: 0 P L C ± — 1 P L C ± — 2 P L C ± 0.01[.02] 3 P L C ± 0.012[.005] 4 P L C ± 0.012[.0005] ANGLES ± — FINISH SEE TABLE		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SO.POST, UNSHROUDED
		PRODUCT SPEC APPLICATION SPEC		
MATERIAL 		SIZE A1	CASE CODE 00779	DRAWING NO C-146475
		WEIGHT —	RESTRICTED TO —	
CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146475-7](#)