

- **Smallest encapsulated 20 W Converter!**  
Ultra compact size: 1.0" x 1.0" x 0.4"
- **Shielded metal case with isolated baseplate**
- **Wide 2:1 input voltage ranges**
- **Very high efficiency up to 90%**
- **Output voltage adjustable**
- **Remote On/Off control**
- **Operating temp. range -40°C to +75°C and up to 85 °C with heat-sink**
- **I/O isolation voltage 1500 VDC**
- **Input filter meets EN 55022 class A without external components**
- **3-year product warranty**



The THN 20 series is the latest generation of high performance DC/DC converter modules with highest power density. The product achieves 20 W output power while it comes in a metal case with dimensions of only 1.0" x 1.0" x 0.4". All models have a wide 2:1 input voltage range and precisely regulated output voltages, even under no load conditions. Highest efficiency of up to 90% makes this product very reliable and applicable in temperature ranges of up to 75°C or 85°C with optional mounted heat sink. Together with low input current characteristics at minimal load and remote On/Off control these converters are the ideal solution for battery-operated systems. Typical applications are in mobile equipment, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on the PCB is critical.

| Models      |                              |          |                  |          |                  |                 |
|-------------|------------------------------|----------|------------------|----------|------------------|-----------------|
| Order Code  | Input Voltage Range          | Output 1 |                  | Output 2 |                  | Efficiency typ. |
|             |                              | Vnom     | I <sub>max</sub> | Vnom     | I <sub>max</sub> |                 |
| THN 20-1210 | 9 - 18 VDC<br>(12 VDC nom.)  | 3.3 VDC  | 4'500 mA         |          |                  | 89 %            |
| THN 20-1211 |                              | 5 VDC    | 4'000 mA         |          |                  | 89 %            |
| THN 20-1212 |                              | 12 VDC   | 1'670 mA         |          |                  | 89 %            |
| THN 20-1213 |                              | 15 VDC   | 1'330 mA         |          |                  | 89 %            |
| THN 20-1222 |                              | +12 VDC  | 833 mA           | -12 VDC  | 833 mA           | 89 %            |
| THN 20-1223 |                              | +15 VDC  | 667 mA           | -15 VDC  | 667 mA           | 90 %            |
| THN 20-2410 | 18 - 36 VDC<br>(24 VDC nom.) | 3.3 VDC  | 4'500 mA         |          |                  | 90 %            |
| THN 20-2411 |                              | 5 VDC    | 4'000 mA         |          |                  | 91 %            |
| THN 20-2412 |                              | 12 VDC   | 1'670 mA         |          |                  | 90 %            |
| THN 20-2413 |                              | 15 VDC   | 1'330 mA         |          |                  | 91 %            |
| THN 20-2422 |                              | +12 VDC  | 833 mA           | -12 VDC  | 833 mA           | 90 %            |
| THN 20-2423 |                              | +15 VDC  | 667 mA           | -15 VDC  | 667 mA           | 90 %            |
| THN 20-4810 | 36 - 75 VDC<br>(48 VDC nom.) | 3.3 VDC  | 4'500 mA         |          |                  | 90 %            |
| THN 20-4811 |                              | 5 VDC    | 4'000 mA         |          |                  | 90 %            |
| THN 20-4812 |                              | 12 VDC   | 1'670 mA         |          |                  | 90 %            |
| THN 20-4813 |                              | 15 VDC   | 1'330 mA         |          |                  | 90 %            |
| THN 20-4822 |                              | +12 VDC  | 833 mA           | -12 VDC  | 833 mA           | 89 %            |
| THN 20-4823 |                              | +15 VDC  | 667 mA           | -15 VDC  | 667 mA           | 90 %            |

| Options |                                                                                                                            |
|---------|----------------------------------------------------------------------------------------------------------------------------|
| THN-HS1 | - Optional Heat Sink: <a href="http://www.tracopower.com/products/thn-hs1.pdf">www.tracopower.com/products/thn-hs1.pdf</a> |

## Input Specifications

|                          |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Current            | - At no load   | 12 Vin models: <b>10 mA typ.</b><br>24 Vin models: <b>6 mA typ.</b><br>48 Vin models: <b>4 mA typ.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          | - At full load | 12 Vin models: <b>1'510 mA typ.</b> (3.3 Vout model)<br><b>1'960 mA typ.</b> (5 Vout model)<br><b>1'960 mA typ.</b> (12 Vout model)<br><b>1'960 mA typ.</b> (15 Vout model)<br><b>1'960 mA typ.</b> (12 Vout model)<br><b>1'960 mA typ.</b> (15 Vout model)<br>24 Vin models: <b>755 mA typ.</b> (3.3 Vout model)<br><b>970 mA typ.</b> (5 Vout model)<br><b>970 mA typ.</b> (12 Vout model)<br><b>970 mA typ.</b> (15 Vout model)<br><b>970 mA typ.</b> (12 Vout model)<br><b>970 mA typ.</b> (15 Vout model)<br>48 Vin models: <b>375 mA typ.</b> (3.3 Vout model)<br><b>485 mA typ.</b> (5 Vout model)<br><b>485 mA typ.</b> (12 Vout model)<br><b>485 mA typ.</b> (15 Vout model)<br><b>485 mA typ.</b> (12 Vout model)<br><b>485 mA typ.</b> (15 Vout model) |
| Surge Voltage            |                | 12 Vin models: <b>25 VDC max.</b> (1 s max.)<br>24 Vin models: <b>50 VDC max.</b> (1 s max.)<br>48 Vin models: <b>100 VDC max.</b> (1 s max.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Under Voltage Lockout    |                | 12 Vin models: <b>7.5 VDC min. / 8 VDC typ. / 8.8 VDC max.</b><br>24 Vin models: <b>15.5 VDC min. / 16 VDC typ. / 17.5 VDC max.</b><br>48 Vin models: <b>32.5 VDC min. / 33 VDC typ. / 35.5 VDC max.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Reflected Ripple Current |                | 12 Vin models: <b>30 mAp-p typ.</b><br>24 Vin models: <b>30 mAp-p typ.</b><br>48 Vin models: <b>30 mAp-p typ.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended Input Fuse   |                | 12 Vin models: <b>4'000 mA</b> (slow blow)<br>24 Vin models: <b>2'000 mA</b> (slow blow)<br>48 Vin models: <b>1'250 mA</b> (slow blow)<br>(The need of an external fuse has to be assessed in the final application.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Input Filter             |                | <b>Internal Pi-Type</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Output Specifications

|                           |                                               |                                                                                                                                                                                                                                                    |
|---------------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output Voltage Adjustment |                                               | -10% to +20% (24 Vout models)<br>±10% (other models)<br>(By external trim resistor)<br>See application note: <a href="http://www.tracopower.com/overview/thn20">www.tracopower.com/overview/thn20</a><br>Output power must not exceed rated power! |
| Voltage Set Accuracy      |                                               | ±1% max.                                                                                                                                                                                                                                           |
| Regulation                | - Input Variation (Vmin - Vmax)               | single output models: <b>0.2% max.</b><br>dual output models: <b>0.5% max.</b>                                                                                                                                                                     |
|                           | - Load Variation (0 - 100%)                   | single output models: <b>0.2% max.</b><br>dual output models: <b>1% max.</b> (Output 1)<br><b>1% max.</b> (Output 2)                                                                                                                               |
|                           | - Cross Regulation<br>(25% / 100% asym. load) | dual output models: <b>5% max.</b>                                                                                                                                                                                                                 |
|                           |                                               |                                                                                                                                                                                                                                                    |

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

|                                        |                 |                       |                                                          |
|----------------------------------------|-----------------|-----------------------|----------------------------------------------------------|
| Ripple and Noise<br>(20 MHz Bandwidth) | - single output | 3.3 Vout models:      | 75 mVp-p typ. (w/ 1 $\mu$ F X7R // 10 $\mu$ F TC)        |
|                                        |                 | 5 Vout models:        | 75 mVp-p typ. (w/ 1 $\mu$ F X7R // 10 $\mu$ F TC)        |
|                                        |                 | 12 Vout models:       | 75 mVp-p typ. (w/ 1 $\mu$ F X7R // 10 $\mu$ F TC)        |
|                                        |                 | 15 Vout models:       | 75 mVp-p typ. (w/ 1 $\mu$ F X7R // 10 $\mu$ F TC)        |
|                                        | - dual output   | 12 / -12 Vout models: | 100 / 100 mVp-p typ. (w/ 1 $\mu$ F X7R // 10 $\mu$ F TC) |
|                                        |                 | 15 / -15 Vout models: | 100 / 100 mVp-p typ. (w/ 1 $\mu$ F X7R // 10 $\mu$ F TC) |
| Capacitive Load                        | - single output | 3.3 Vout models:      | 7'000 $\mu$ F max.                                       |
|                                        |                 | 5 Vout models:        | 5'000 $\mu$ F max.                                       |
|                                        |                 | 12 Vout models:       | 850 $\mu$ F max.                                         |
|                                        |                 | 15 Vout models:       | 700 $\mu$ F max.                                         |
|                                        | - dual output   | 12 / -12 Vout models: | 500 / 500 $\mu$ F max.                                   |
|                                        |                 | 15 / -15 Vout models: | 350 / 350 $\mu$ F max.                                   |
| Minimum Load                           |                 |                       | Not required                                             |
| Temperature Coefficient                |                 |                       | $\pm 0.02$ %/K max.                                      |
| Start-up Time                          |                 |                       | 30 ms max.                                               |
| Short Circuit Protection               |                 |                       | Continuous, Automatic recovery                           |
| Output Current Limitation              |                 |                       | 110 - 190% of Iout max.                                  |
|                                        |                 |                       | 150% typ. of Iout max.                                   |
| Overvoltage Protection                 |                 |                       | 112 - 164% of Vout nom.                                  |
| Transient Response                     | - Response Time |                       | 250 $\mu$ s typ. (25% Load Step)                         |

## Safety Specifications

|                       |                             |                                                                                          |
|-----------------------|-----------------------------|------------------------------------------------------------------------------------------|
| Safety Standards      | - IT / Multimedia Equipment | EN 60950-1<br>IEC 60950-1<br>UL 60950-1                                                  |
|                       | - Certification Documents   | <a href="http://www.tracopower.com/overview/thn20">www.tracopower.com/overview/thn20</a> |
| Pollution Degree      |                             | PD 2                                                                                     |
| Over Voltage Category |                             | OVC I                                                                                    |

## EMC Specifications

|               |                             |                                                                                                                    |
|---------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------|
| EMI Emissions | - Conducted Emissions       | EN 55032 class A (internal filter)                                                                                 |
|               |                             | EN 55032 class B (with external filter)                                                                            |
|               | - Radiated Emissions        | EN 55032 class A (internal filter)                                                                                 |
|               |                             | EN 55032 class B (with external filter)                                                                            |
|               |                             | External filter proposal: <a href="http://www.tracopower.com/overview/thn20">www.tracopower.com/overview/thn20</a> |
| EMS Immunity  | - Electrostatic Discharge   | Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A                                                                    |
|               |                             | Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A                                                                |
|               | - RF Electromagnetic Field  | EN 61000-4-3, 10 V/m, perf. criteria A                                                                             |
|               | - EFT (Burst) / Surge       | EN 61000-4-4, $\pm 2$ kV, perf. criteria A                                                                         |
|               |                             | EN 61000-4-5, $\pm 2$ kV, perf. criteria A                                                                         |
|               |                             | Ext. input component: 220 $\mu$ F, 100 V                                                                           |
|               | - Conducted RF Disturbances | EN 61000-4-6, 10 Vrms, perf. criteria A                                                                            |
|               | - PF Magnetic Field         | Continuous: EN 61000-4-8, 100 A/m, perf. criteria A                                                                |
|               |                             | 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A                                                                      |
|               |                             |                                                                                                                    |

## General Specifications

|                    |                         |                                   |
|--------------------|-------------------------|-----------------------------------|
| Relative Humidity  |                         | 95% max. (non condensing)         |
| Temperature Ranges | - Operating Temperature | -40°C to +75°C                    |
|                    |                         | -40°C to +85°C (with Heat Sink)   |
|                    | - Case Temperature      | +105°C max.                       |
|                    | - Storage Temperature   | -55°C to +125°C                   |
| Power Derating     | - High Temperature      | 2 %/K above 60°C                  |
|                    |                         | 2 %/K above 70°C (with Heat Sink) |
| Cooling System     |                         | Natural convection (20 LFM)       |

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

|                           |                                 |                                                                                                                  |
|---------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------|
| Remote Control            | - Voltage Controlled Remote     | On: 3.0 to 15 VDC or open circuit<br>Off: 0 to 1.2 VDC or short circuit<br>Refers to 'Remote' and '-Vin' Pin     |
|                           | - Off Idle Input Current        | 2 mA typ.                                                                                                        |
|                           | - Remote Pin Input Current      | -0.5 to 1.0 mA                                                                                                   |
| Altitude During Operation |                                 | 2'000 m max.                                                                                                     |
| Switching Frequency       |                                 | 275 kHz typ. (PWM) ( $\pm 10\%$ , 3.3 & 5 Vout model)<br>330 kHz typ. (PWM) ( $\pm 10\%$ , other models)         |
| Insulation System         |                                 | Functional Insulation                                                                                            |
| Isolation Test Voltage    | - Input to Output, 60 s         | 1'600 VDC                                                                                                        |
|                           | - Input to Case, 60 s           | 1'000 VDC                                                                                                        |
|                           | - Output to Case, 60 s          | 1'000 VDC                                                                                                        |
| Isolation Resistance      | - Input to Output, 500 VDC      | 1'000 M $\Omega$ min.                                                                                            |
| Isolation Capacitance     | - Input to Output, 100 kHz, 1 V | 1'000 pF max.                                                                                                    |
| Reliability               | - Calculated MTBF               | 1'400'000 h (MIL-HDBK-217F, ground benign)                                                                       |
| Environment               | - Vibration                     | MIL-STD-810F                                                                                                     |
|                           | - Thermal Shock                 | MIL-STD-810F                                                                                                     |
| Housing Material          |                                 | Nickel coated Copper                                                                                             |
| Base Material             |                                 | Non-conductive FR4 (UL94 V-0 rated)                                                                              |
| Potting Material          |                                 | Silicone (UL 94 V-0 rated)                                                                                       |
| Pin Material              |                                 | Copper                                                                                                           |
| Pin Foundation Plating    |                                 | Nickel (2 - 3 $\mu$ m)                                                                                           |
| Pin Surface Plating       |                                 | Tin (3 - 5 $\mu$ m), matte                                                                                       |
| Soldering Profile         |                                 | 265°C / 10 s max.                                                                                                |
| Connection Type           |                                 | THD (Through-Hole Device)                                                                                        |
| Weight                    |                                 | 15 g                                                                                                             |
| Thermal Impedance         |                                 | 17.6 K/W                                                                                                         |
|                           |                                 | 14.8 K/W (with Heat Sink)                                                                                        |
| Environmental Compliance  | - Reach                         | <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> |
|                           | - RoHS                          | <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>   |


## Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/thn20](http://www.tracopower.com/overview/thn20)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

## Outline Dimensions

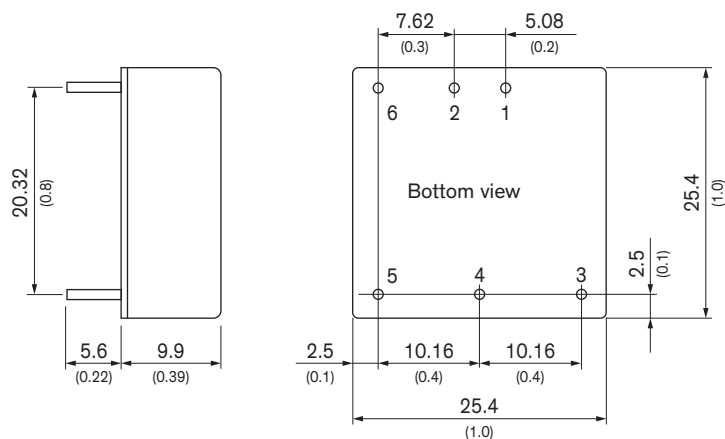

Dimensions in mm (inch)  
Tolerances:  $\pm 0.5$  ( $\pm 0.02$ )  
Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )  
Pin diameter  $\varnothing 1.0$  (0.04)

### Pinout

| Pin | Single        | Dual          |
|-----|---------------|---------------|
| 1   | +Vin (Vcc)    | +Vin (Vcc)    |
| 2   | -Vin (GND)    | -Vin (GND)    |
| 3   | +Vout         | +Vout         |
| 4   | Trim          | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TRACO Power:

|                                    |                                    |                                    |                                    |                                    |                                    |                                    |                                    |
|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| <a href="#"><u>THN 20-4812</u></a> | <a href="#"><u>THN 20-2411</u></a> | <a href="#"><u>THN 20-4823</u></a> | <a href="#"><u>THN 20-2423</u></a> | <a href="#"><u>THN 20-4811</u></a> | <a href="#"><u>THN 20-2410</u></a> | <a href="#"><u>THN 20-1210</u></a> | <a href="#"><u>THN 20-4813</u></a> |
| <a href="#"><u>THN 20-1222</u></a> | <a href="#"><u>THN 20-1212</u></a> | <a href="#"><u>THN 20-2422</u></a> | <a href="#"><u>THN 20-4822</u></a> | <a href="#"><u>THN 20-1211</u></a> | <a href="#"><u>THN 20-1213</u></a> | <a href="#"><u>THN 20-1223</u></a> | <a href="#"><u>THN 20-2412</u></a> |
| <a href="#"><u>THN 20-2413</u></a> | <a href="#"><u>THN 20-4810</u></a> |                                    |                                    |                                    |                                    |                                    |                                    |